CITY MULTI



Job Name:

Schedule Reference:



Compatibility reference CM PAB 100 20 002

GENERAL FEATURES

- Dual set point functionality (*2)
- New stylish design of the front grill
- Multiple fan-speed settings
- Intake grille filter is easily removed for cleaning
- Wireless receiver on board
- Quiet operation
- IT Termial Plug

ACCESSORIES

Drain Pump - (PAC-SK01DM-E)

External Heater Adaptor - (PAC-YU25HT) Wireless Remote Controller - (PAR-FL32MA-E)

		ate:		
Model			PKFY-P04NLMU-E	
Power source			1-phase 208/230V 60Hz	
Cooling capacity *1		BTU/h	4,000	
(Nominal) *1		kW	1.1	
	Power input	kW	0.02	
	Current input	А	0.2	
Heating capacity *2		BTU/h	4,500	
(Nominal) *2		kW	1.3	
	Power input	kW	0.01	
	Current input	А	0.15	
Minimum Circuit Ampacity *		А	0.24	
External finish			Plastic, MUNSELL (0.7PB 9.2/0.4)	
External dimension HxWxD		in.	11-25/32 x 30-7/16 x 9-11/32	
		mm	299 x 773 x 237	
Net weight		lbs (kg)	23.6(10.7)	
Heat exchanger			Cross fin (Aluminum fin and copper tube)	
FAN	Type x Quantity		Line flow fan x 1	
	External static press.	in.WG	0	
		Pa	0	
	Motor Type		DC motor	
	Motor output	kW	0.03	
	Driving mechanism		Direct-driven	
	Air flow rate	cfm	117-124-134-148	
	(Low-Mid2-Mid1-High)	m3/min	3.3-3.5-3.8-4.2	
Sound pressure level (measured in anechoic room)		dB <a>	22-24-26-28	
Insulation material			Polyethylene sheet	
Air filter			PP honeycomb	
Protection device			Fuse	
Refrigerant control device			LEV	
Connectable outdoor unit			R410A CITY MULTI	
Diameter of refrigerant pipe	Liquid (R410A)	in.(mm)	1/4(6.35) Flare	
	Gas (R410A)	in.(mm)	1/2(12.70) Flare	
Field drain pipe size		in.(mm)	I.D. 5/8(16)	

NOTE:

Note:
Nitsubishi Electric Sales Canada Inc. (MESCA) supports the use of only MESCA supplied and approved components and accessories for proper functioning of the unit(s). Use of non - MESCA supported components and accessories will affect warranty coverage. MESCA recommends
(A) consideration of all applicable design and application parameters and requirements specific to any project; and
(B) implementation of any countermeasures needed to address those parameters and requirements, wherever applicable.
*2. All components of the system must be compatible. For more details on system control compatibility, please refer to Technical Bulletin 100-151 available on our website.
NOTE: Items denoted in this submittal by an asterisk (*) are provided as specific instances or examples of system compatibility, requirements.
3. Should any person change this document in any manner

whatsoever without MESCA's written permission, the document shall be of no force and effect and any change shall be deemed to be a representation and warranty made by that person and not MESCA. That person, and not MESCA, shall assume full responsibility for the consequences of such changes. MESCA assumes no responsibility for any consequences in such cases.

Notes:


Specifications are subject to change without notice.

Note :	*1 Nominal cooling conditions	*2 Nominal heating conditions
Indoor :	80degF D.B. / 67degF W.B.	70degF D.B.
	(26.7degC D.B. / 19.4degC W.B.)	(21.0degC D.B.)
Outdoor :	95degF D.B.	47degF D.B. / 43degF W.B.
	(35degC D.B.)	(8.3degC D.B. / 6.1degC W.B.)
Pipe length :	25 ft. (7.6 m)	25 ft. (7.6 m)
Level difference :	0 ft. (0 m)	0 ft. (0 m)

Note:

Ventilation air to be introduced independent of or in series with VRF indoor units. Please refer to local codes for the required ventilation rates specific to the application.

Model: PKFY-P04NLMU-E-TH – DIMENSIONS

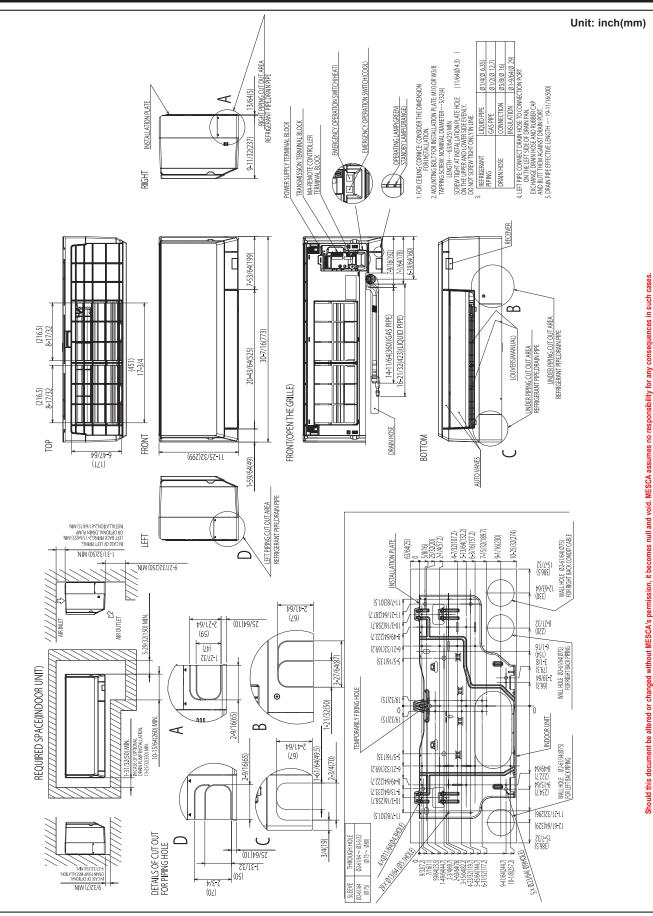

Form # SB_PKFY-P04NLMU-E-TH_202007 Specifications are subject to change without notice. www.MitsubishiElectric.ca © 2020 Mitsubishi Electric Sales Canada Inc.



Page 2 of 2

