

Job Name: _____ Location: _____

Purchaser: _____


Engineer: _____

Submitted To: _____ For: ? Reference ? Approval ? Construction

Submitted By: _____ Date: _____

Unit Designation: Schedule No. _____ Model No.: _____

CITYMULTI Outdoor Unit

Submittal Data: PUMY-71VM2  **MITSUBISHI ELECTRIC**

S-Series heat pump

Capacities

Cooling27,200 BTU

Heating30,800 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB

Indoor Design Cooling 27°C DB / 19.0°C WB

Indoor Design Heating 20°C DB

Outdoor Unit:

Power Supply220/1/60

Max. Fuse Size.....30 Amps

Min. Ampacity23 Amps

Weight225 Lbs.

SounddB(A) 52



Refrigerant Piping:

Liquid (OD)3/8" In.

Gas (OD)5/8" In.


Standard Features:

- * One year parts warranty 6 year on compressor
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Vairable Refrigerant Flow
- * Quiet operation
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 8% to 108%
- * Network Control
- * Advanced oil return system
- * Long pipe runs up to 100m
- * Connectable indoor unit Capacity 50 - 130%
- * Connectable indoor unit Models 20 ~ 80
- * Connectable indoor unit 1 ~ 4

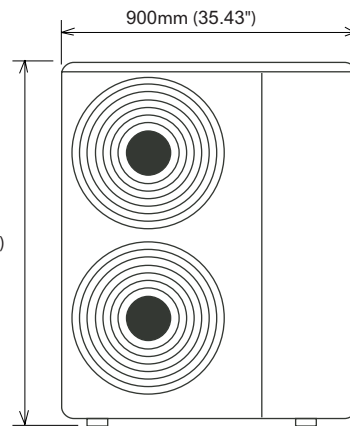

FRONT VEIW

355 mm (13.976")

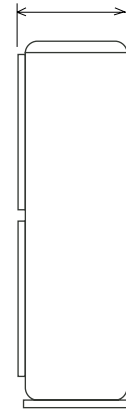

SIDE VEIW

Notes: