

**SUBMITTAL DATA: MSZ-GL09NA-(U1)(U2) & MUZ-GL09NAH-U2**  
9,000 BTU/H WALL-MOUNTED HEAT PUMP SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
System Designation:	Schedule No.:	



Wireless Remote Controller

**ACCESSORIES:**

**Indoor Unit**

Anti-Allergy Enzyme Filter (MAC-408FT-E)

**Outdoor Unit**

Windscreens (ME-FR-15-17)

**Controls**

- Wireless Controller (MHK2)
- Wired Remote Controller PAR-40MAA (Requires MAC-334IF-E)
- Thermostat Interface (PAC-US444CN-1)

**Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.**

**SPECIFICATIONS:**

**Rated Conditions (Capacity / Input)**

Cooling <sup>1</sup>	Btu/h / W	9,000 / 585
Heating at 47° F <sup>2</sup>	Btu/h / W	10,900 / 720

Capacity Range		Minimum	Maximum
Cooling <sup>1</sup>	Btu/h	3,600	12,200
Heating at 47° F <sup>2</sup>	Btu/h	4,500	14,100
Heating at 17° F <sup>3</sup>	Btu/h	-	9,400
Heating at 5° F <sup>4</sup>	Btu/h	-	7,600

<sup>1</sup> Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB; Outdoor: 95° F (35° C) DB / 75° F (24° C) WB  
<sup>2</sup> Heating at 47° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB; Outdoor: 47° F (8° C) DB / 43° F (6° C) WB  
<sup>3</sup> Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB; Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB  
<sup>4</sup> Heating at 5° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB; Outdoor: 5° F (-15° C) DB / 5° F (-15° C) WB  
 \* Rating Conditions per AHRI Standard:

**Operating Conditions (Indoor Intake Air Temp.) (Max./ Min.)**

Cooling <sup>2</sup>	90° F (32° C) DB / 67° F (19° C) DB
Heating	80° F (27° C) DB / 70° F (21° C) DB

**Operating Conditions (Outdoor Intake Air Temp.) (Max./ Min.)**

Cooling <sup>5</sup>	115 F (46° C) DB / 14° F (-10° C) DB
Heating	75° F (24° C) DB / -4° F (-20° C) DB

<sup>5</sup> Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**AHRI Efficiency Ratings**

SEER (SEER2) / HSPF (HSPF2) / EER (EER2)	24.6 (24.3) / 11.8 (9.5) / 15.4 (15.4)
COP at 47° F / 17° F / 5° F	4.44 / 3.3 / 2.39

<b>Energy Star®</b>	Yes
---------------------	-----

ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

<b>Electrical Power Requirements</b>	208 / 230V, 1-Phase, 60 Hz
--------------------------------------	----------------------------

**Minimum Circuit Ampacity (MCA) \***

Indoor / Outdoor (RBS)	A	1 / 9 (15A - Recommended Breaker Size)
------------------------	---	--

**\* All electrical work shall comply with National (CEC) and local codes and regulations.**

**Indoor Unit**

Blower Motor (ECM)	F.L.A.	0.76
Blower Motor Output	W	30
SHF / Moisture Removal		0.820 / 1.5 pt./h
Field Drainpipe Size O.D.	In.(mm)	5/8 (15)

**Outdoor Unit**

Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.76

**Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)**

Indoor (Cooling)	DRY	CFM	145-170-237-321-399
	WET		109-134-201-286-364
Indoor (Heating)	DRY	CFM	145-170-237-321-406
Outdoor			1,229 / 1,172

**Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)**

Indoor	Cooling	dB(A)	19-22-30-37-43
	Heating		19-22-30-37-43
Outdoor	Cooling	dB(A)	48
	Heating		50

**External Dimensions**

Indoor (H x W x D)	In.(mm)	11-5/8 x 31-7/16 x 9-1/8 (295 x 798 x 232)
Outdoor (H x W x D)		21-5/8 x 31-1/2 x 11-1/4 (550 x 800 x 285)

**Net Weight**

Indoor	Lbs.(kg)	22 (10)
Outdoor		81 (37)

**External Finish**

Indoor	Munsell 1.0Y 9.2 / 0.2
Outdoor	Munsell No. 3Y 7.8 / 1.1

<b>Refrigerant</b>	R410A; 2 lb. 9 oz.
--------------------	--------------------

**Refrigerant Piping (Flared)**


Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		3/8 (9.52)
Max. Total Refrigerant Pipe Length (Height Diff.)	Ft. (m)	40 (12)
Max. Total Refrigerant Pipe Length (Length.)		65 (20)

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Specifications are subject to change without notice


# DIMENSIONS: MSZ-GL09NA-(U1)(U2) & MUZ-GL09NAH-U2

Unit: in. (mm)

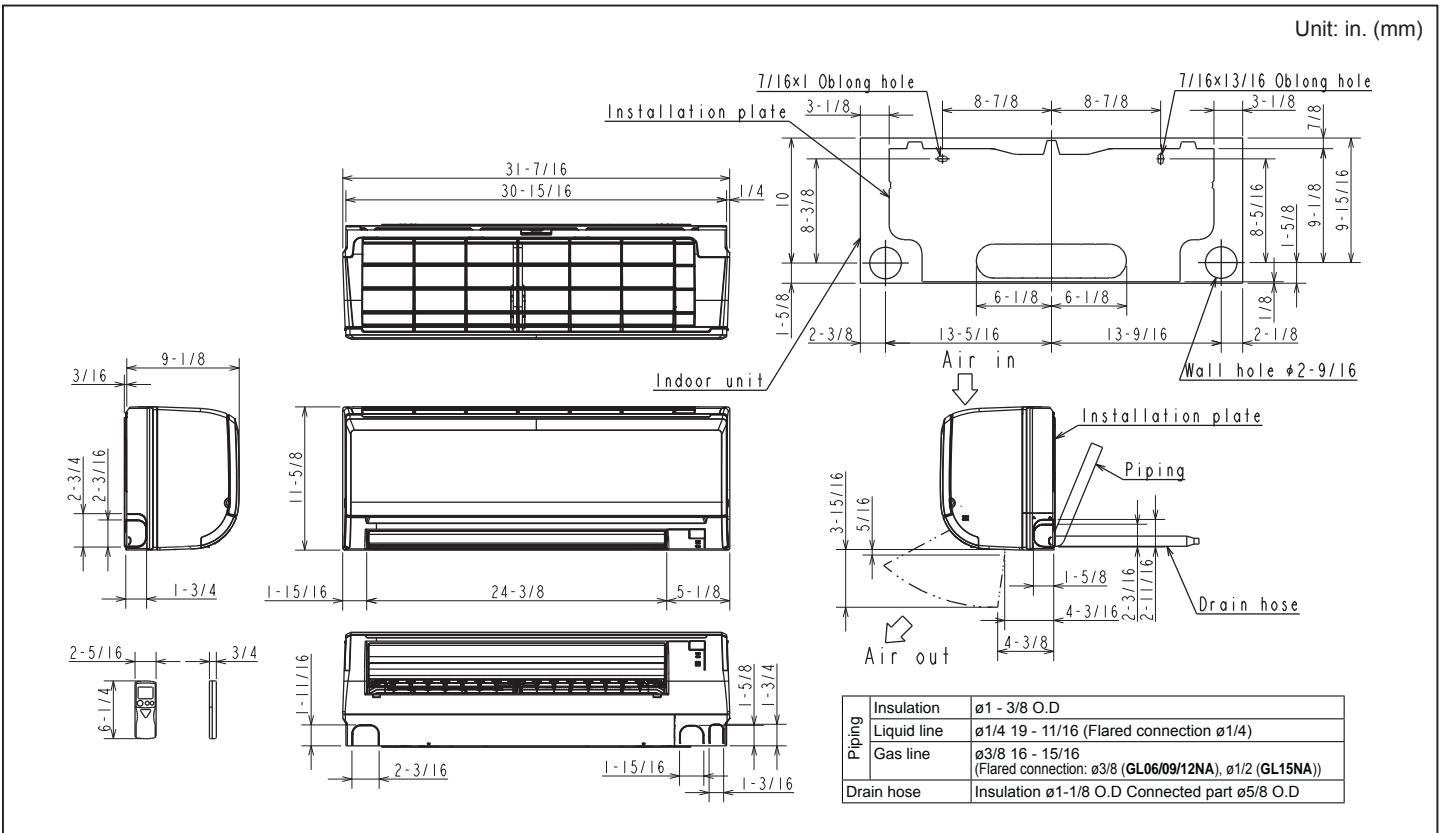

## REQUIRED SPACE

Unit: in. (mm)

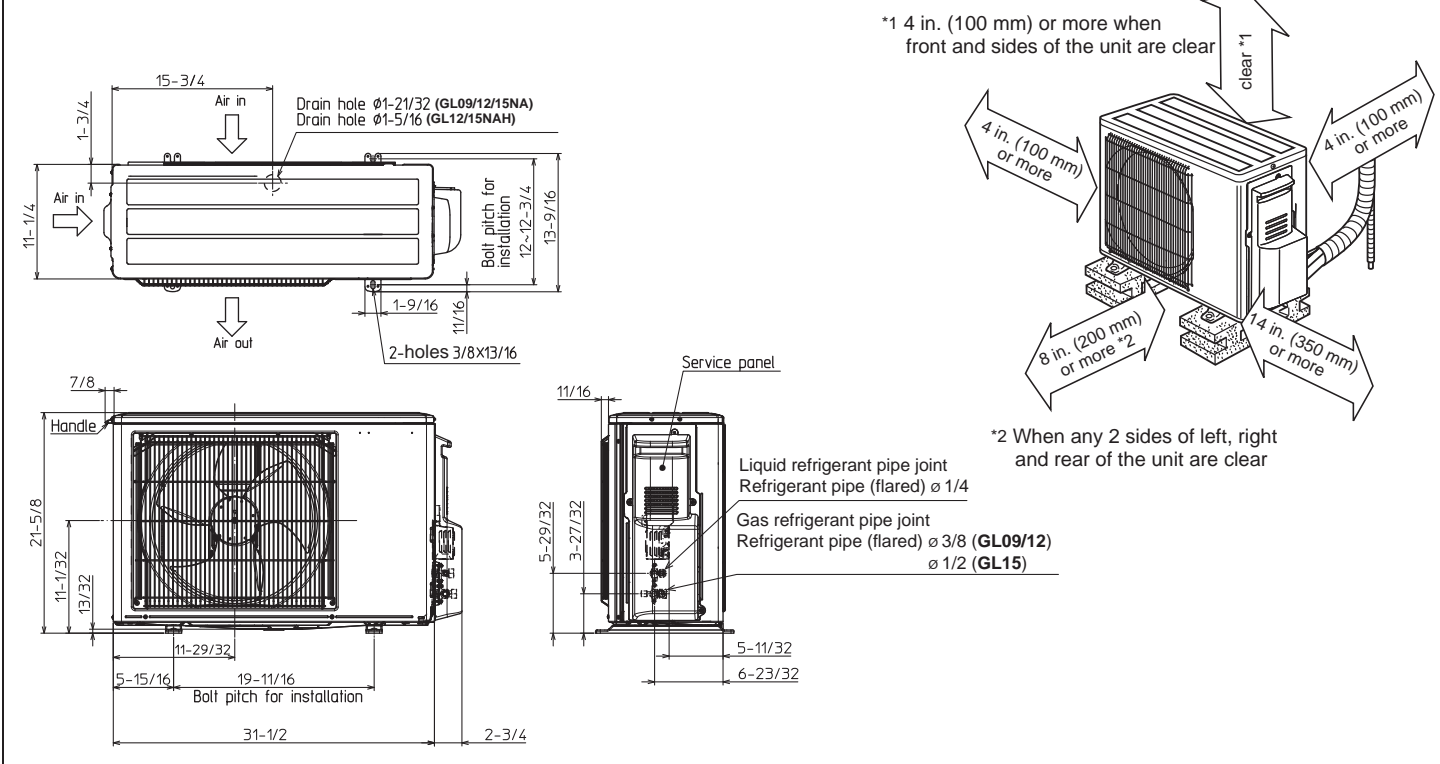

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.