

Submittal Data: MSZ-GS18NA-U1

leating and Cooling

18,000 BTU/H Wall-Mounted Indoor Unit for MXZ and PUMY Heat Pump System

lob Name:	Location:	
Purchaser:	Submitted By:	
Submitted To:	Reference: Approva	al: Construction:
Engineer:	Date:	Application:
	Ane-	
		Images provided for reference purpo
Rated Capacity:		
Cooling ¹	Btu/h	18,000
Heat at 47°F ²	Btu/h	21,600
ndoor Unit Specifications:		
Power Supply		208/230V, 1Ph, 60Hz
МСА	А	1.0
Blower Motor Full Load Amperage	A	0.74
Blower Motor Output	W	30
Airflow Rate at Cooling, Dry	CFM	250 - 325 - 407 - 511 - 629
Airflow Rate at Cooling, Wet Airflow Rate at Heating, Dry	CFM CFM	225 -292 -367 - 460 - 566 287 - 375 - 459 - 550 - 629
Sound Pressure Level (Cooling)	dB(A)	28 - 33 - 38 - 44 - 49
Sound Pressure Level (Heating)	dB(A)	28 - 33 - 38 - 44 - 49
Drain Pipe Size	In. (mm)	5/8 (15.88)
External Finish Color		Munsell 1.0Y 9.2/0.2
Unit Dimensions		
	W: In. (mm)	36-5/16 (923)
	D: In. (mm)	9-13/16 (250)
	H: In. (mm)	12 (305)
Jnit Weight	Lbs. (kg)	28 (12.7)
Gas Pipe Size O.D. (Flared)	In. (mm)	1/2 (12.70)
iquid Pipe Size O.D. (Flared)	In. (mm)	1/4 (6.35)
Moisture Removal	pints/h	3.8
Nodel No.	Description: (Optional Controls)	
MELCO-RETAIL-MINI	Building Automated System DDC Interface	
PAR-40MAAU	Wired Wall Mounted Remote Control	
PAR-CT01MAU-SB	Touch Screen Wired Wall Mounted Control	
PAC-YT53CRAU-J	Basic Wired Wall Mounted Control	
RMF-CA200	Deluxe Thermostat Interface	
MAC-334IF-E	System Control Interface	
MAC-497IF-E	PAR Control Interface	
ИНК2	Wireless Wall Mounted Control	
	Description: (Accessories)	
Model No.	Description: (Accessories)	

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB

²Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB

For data on specific Indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see MXZ Technical and Service Manuals. Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Note:


1. Mitsubishi Electric Sales Canada Inc. (MESCA) supports the use of only MESCA supplied and approved components and accessories for proper functioning of the unit(s). Use of non - MESCA supported components and accessories will affect warranty coverage. MESCA recommends (A) consideration of all applicable design and application parameters and requirements specific to any project.

2. Should any person change this document in any manner whatsoever without MESCA's written permission, the document shall be of no force and effect and any change shall be deemed to be a representation and warranty made by that person and not MESCA. That person, and not MESCA, shall assume full responsibility for the consequences of such changes. MESCA assumes no responsibility for any consequences in such cases.



Submittal Data: MSZ-GS18NA-U1

Indoor Unit Outline and Dimensions:

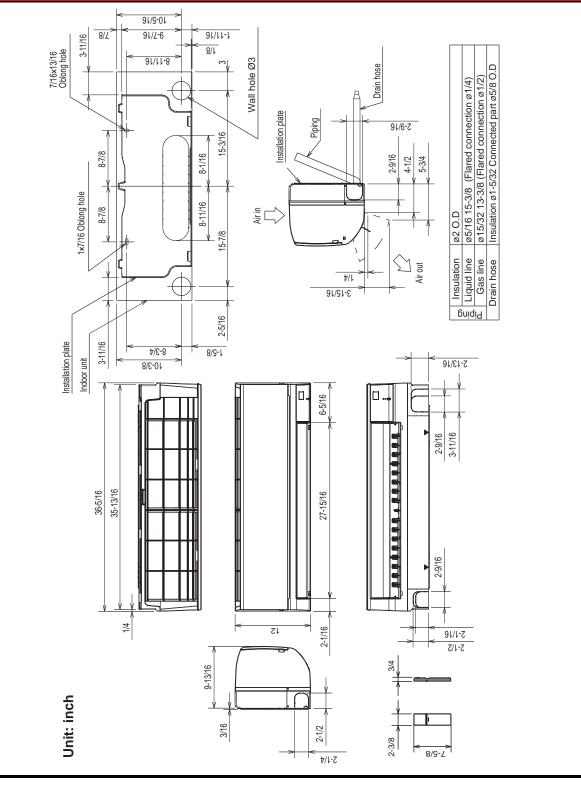





Page 2 of 2



Specifications are subject to change without notice. Form No.SB_MSZ-GS18NA-U1_For_MXZ_PUMY_SYS_202306

www.MitsubishiElectric.ca

© 2023 Mitsubishi Electric Sales Canada Inc.