

Job Name:

Schedule Reference:

Date:



Minimum Operating Temperature
Heating (Outdoor): -25°F (-32°C) WB
Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Outdoor Model				PURY-HP192TSNU-A1				
Indoor Model				Non-Ducted		Ducted		
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz				
Cooling capacity *1 (Nominal)				BTU/h	192,000			
				kW	56.3			
			Power input	kW	14.53			
				(208-230) Current input	A	44.8-40.5		
			(Rated)	BTU/h	184,000			
				kW	53.9			
			Power input	kW	16.05		16.15	
				(208-230) Current input	A	49.5-44.7		49.8-45.0
Temp. range of cooling			Indoor	W.B.	59~75°F (15~24°C)			
			Outdoor	D.B.	23~126°F (-5~52°C)			
Heating capacity *2 (Nominal)				BTU/h	215,000			
				kW	63.0			
			Power input	kW	16.49			
				(208-230) Current input	A	50.8-45.9		
			(Rated)	BTU/h	206,000			
				kW	60.4			
			Power input	kW	15.04		15.20	
				(208-230) Current input	A	46.3-41.9		46.8-42.3
Temp. range of heating			Indoor	D.B.	59~81°F (15~27°C)			
			Outdoor	W.B.	-22~60°F (-30~15.5°C)			
Indoor unit connectable			Total capacity		50~150% of outdoor unit capacity			
			Model/Quantity		P04~P96/1~48			
Sound power level (measured in anechoic room) *3				dB <A>	82.0/83.0			
Refrigerant piping diameter			High pressure	in. (mm)	7/8 (22.2) Brazed			
			Low pressure	in. (mm)	1-1/8 (28.58) Brazed			

Set Model

Model		PURY-HP96TNU-A1	PURY-HP96TNU-A1
Minimum Circuit Ampacity (*)		66-60	66-60
Maximum Overcurrent Protection (*)		110-100	110-100
FAN	Type x Quantity	Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm	8,300
		m3/min	235
	Control, Driving mechanism	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW	0.46+0.46
	External static press.	0 in.WG (0 Pa)	0 in.WG (0 Pa)
		0 in.WG (0 Pa)	0 in.WG (0 Pa)
	Type x Quantity	Inverter scroll hermetic compressor x 1	Inverter scroll hermetic compressor x 1
Compressor			
	Starting method	Inverter	Inverter
	Motor output	kW	5.6
	Case heater	kW	0.045
	Lubricant	MEL46EH	MEL46EH
External finish		Pre-coated galvanized steel sheet <MUNSELL 5Y 8/1>	Pre-coated galvanized steel sheet <MUNSELL 5Y 8/1>
External dimension H x W x D	in.	71-5/8 x 48-7/8 x 29-3/16	71-5/8 x 48-7/8 x 29-3/16
	mm	1,818 x 1,240 x 740	1,818 x 1,240 x 740
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection
	Fan motor		-
Refrigerant	Type x original charge		R410A x 23 lbs + 12 oz (10.8 kg)
	Control		Indoor LEV and BC controller
Net weight	lbs (kg)	653 (296)	653 (296)
Heat exchanger		Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube
HIC circuit (HIC: Heat Inter-Changer)		-	-
Pipe between unit and distributor	High pressure	in. (mm)	3/4 (19.05) Braze
	Low pressure	in. (mm)	7/8 (22.2) Braze
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle)	
Optional parts		Outdoor Twinning kit: CMY-R200NCBK Joint: CMY-Y102SS-G2, CMY-Y102LS-G2, CMY-Y202S-G2, CMY-R160-J1 CMY-R201, 202, 203, 204, 306S-G, CMY-R302, 303, 304, 305S-G1 Main BC controller: CMB-P108, 1012, 1016NU-JA1, CMB-P1016NU-KA2 Sub BC controller: CMB-P104, 108NU-KB2	

Notes:


- Nominal cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F DB / 67°F WB, 26.7°C DB / 19.4°C WB, Outdoor: 95°F DB / 35°C DB, 6.1°C WB
- Nominal heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F DB / 21.1°C DB, Outdoor: 47°F DB / 43°F WB, 8.3°C DB / 6.1°C WB
- Cooling mode/Heating mode
- External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

* All electrical work shall comply with National (NEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-HP192TSNU-A1 - DIMENSIONS

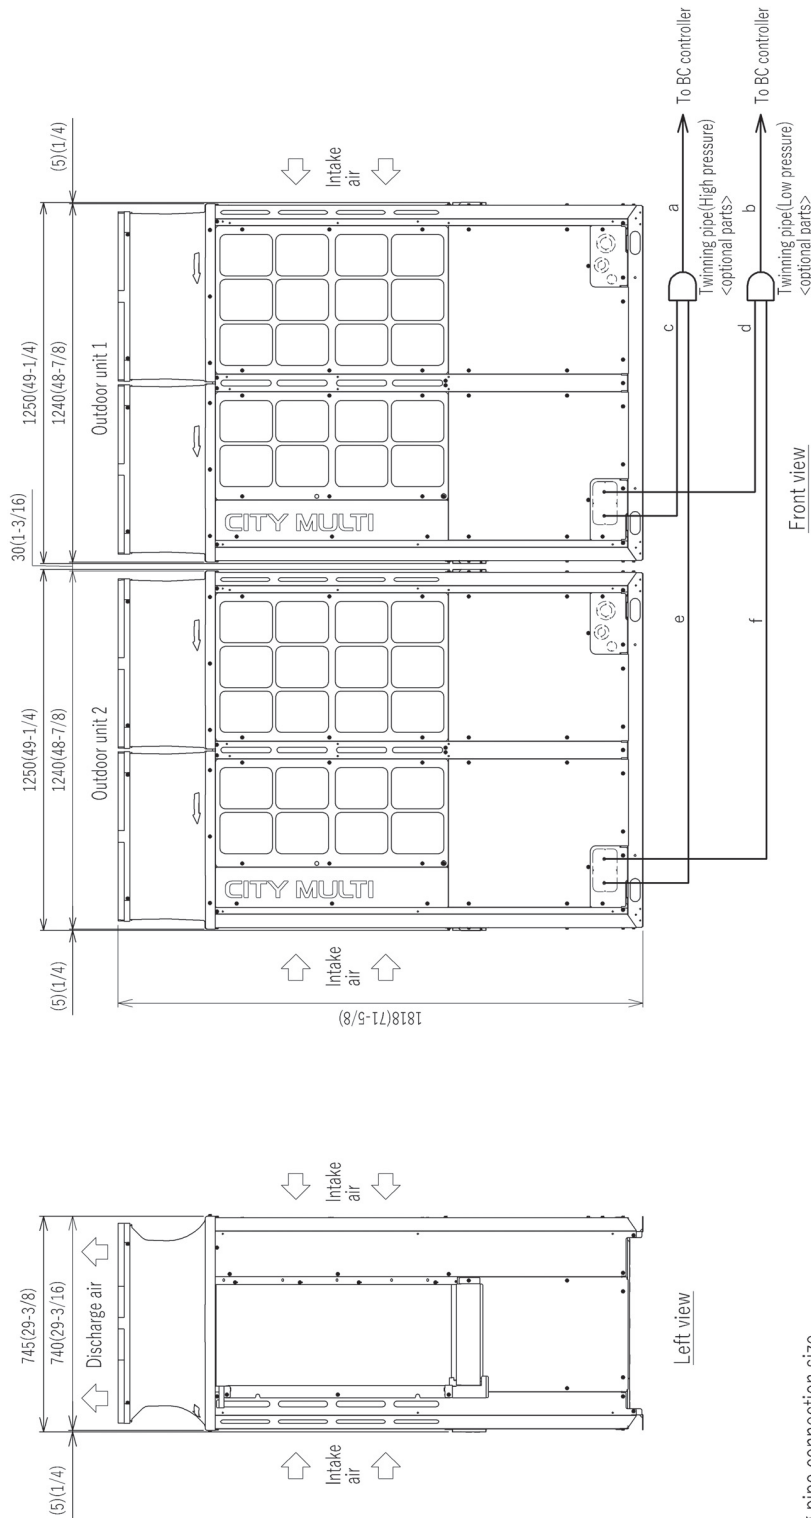

Twining pipe connection size

Package unit name	HP144T/YSNU	HP192T/YSNU	HP240T/YSNU
Component unit name	HP72T/YSNU	HP96T/YSNU	HP120T/YSNU
Outdoor unit 1	HP72T/YSNU	HP96T/YSNU	HP120T/YSNU
Outdoor unit 2	HP72T/YSNU	HP96T/YSNU	HP120T/YSNU
Outdoor Twining Kit (optional parts)	CMY-R100NCBK	CMY-R200NCBK	CMY-R200NCBK
BC controller	CMY-R100NCBK	CMY-R200NCBK	CMY-R200NCBK
~Twining pipe	a	b	c
High pressure	φ 22.2 (7/8)	φ 28.58 (1-1/8)	φ 34.93 (1-3/8)
Low pressure	φ 15.88 (5/8)	φ 19.05 (3/4)	φ 19.05 (3/4)
~Twining pipe	d	e	f
High pressure	φ 22.2 (7/8)	φ 28.58 (1-1/8)	φ 34.93 (1-3/8)
Low pressure	φ 15.88 (5/8)	φ 19.05 (3/4)	φ 19.05 (3/4)
~Outdoor unit 1	a	b	c
High pressure	φ 22.2 (7/8)	φ 28.58 (1-1/8)	φ 34.93 (1-3/8)
Low pressure	φ 15.88 (5/8)	φ 19.05 (3/4)	φ 19.05 (3/4)
~Outdoor unit 2	d	e	f
High pressure	φ 22.2 (7/8)	φ 28.58 (1-1/8)	φ 34.93 (1-3/8)
Low pressure	φ 15.88 (5/8)	φ 19.05 (3/4)	φ 19.05 (3/4)

* When the piping length is 65m (213ft) or longer, use the φ 28.58 (1-1/8) pipe for the part that exceeds 65m (213ft).

- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
- Note 2. Twining pipes must be installed horizontally using a level vessel. Be sure to see the Installation Manual for details of Twining pipe installation.
- Note 3. The pipe section before the Twining pipe (section "a" and "b" in the figure) must have at least 500mm (19-11/16) of straight section (* including the straight pipe that is supplied with the Twining pipe).
- Note 4. Only use the Twining pipe by Mitsubishi (optional parts).


Unit: mm (in.)

Module: PURY-HP96TNU-A1 - DIMENSIONS

Connecting pipe specifications

Model	Refrigerant pipe *1		Diameter	
	High pressure	Low pressure	High pressure	Low pressure
HP72	φ15.88(5/8) Braze	φ19.05(3/4) Braze	φ28.58(1-1/8) Braze	φ28.58(1-1/8)
HP96	φ19.05(3/4) Braze	φ22.27(7/8) Braze	φ28.58(1-1/8) Braze	φ28.58(1-1/8)
HP120	φ19.05(3/4) Braze	φ28.58(1-1/8) Braze	φ28.58(1-1/8) Braze	φ28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.

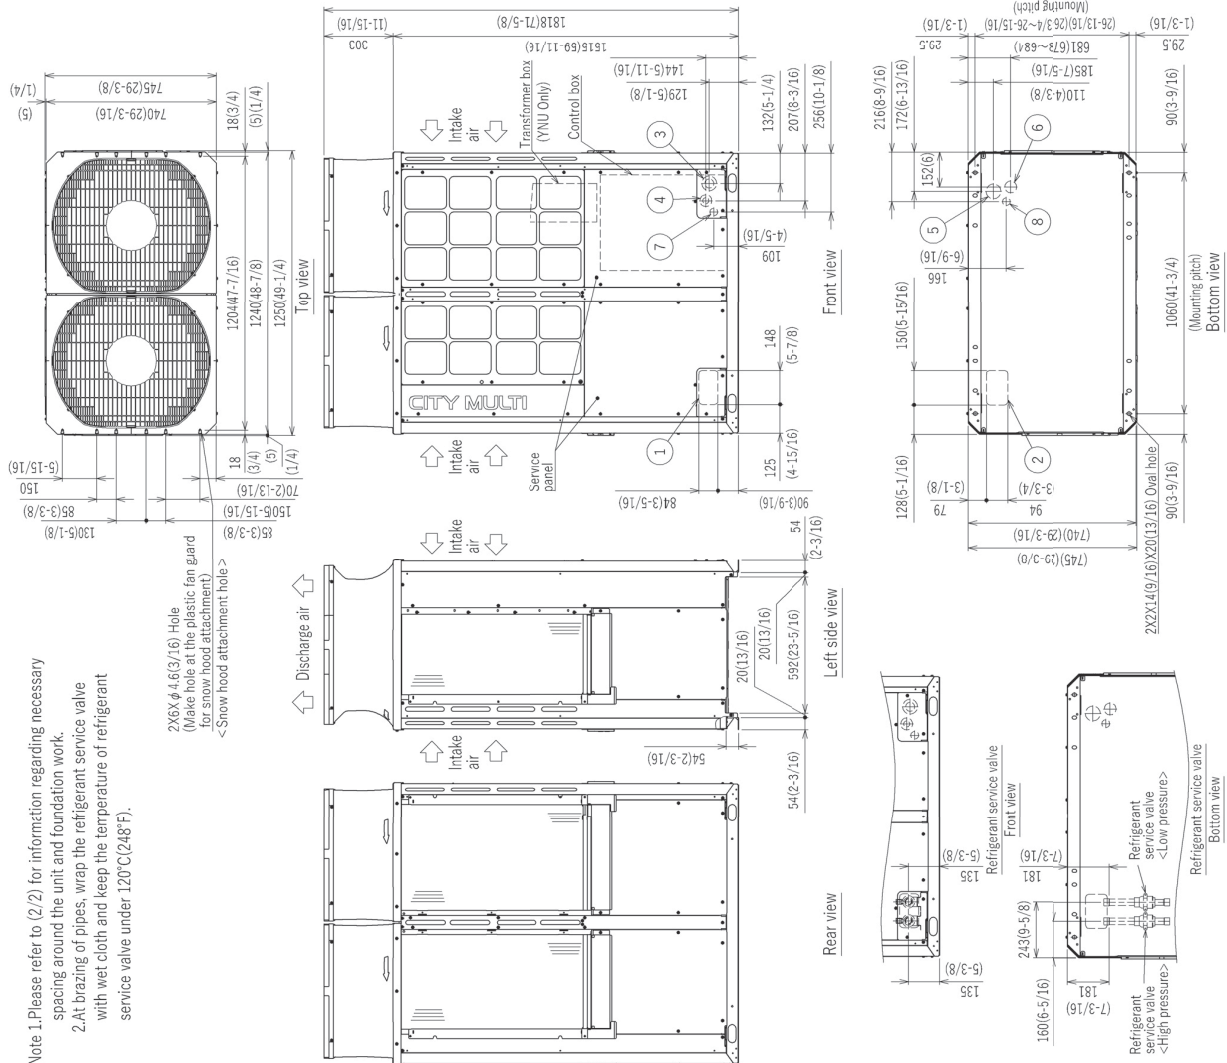

Note 1. Please refer to (2/2) for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

No.	Usage	Specifications
①	Front through hole	148(5-7/8) X 84(3-1/5) Knockout hole
②	Bottom through hole	150(5-15/16) X 94(3-3/4) Knockout hole
③	Front through hole	φ62.7(2-1/2) or φ34.5(1-3/8) Knockout hole
④	Front through hole	φ43.7(1-3/4) or φ22.2(7/8) Knockout hole
⑤	Bottom through hole	φ65(2-9/16) Knockout hole
⑥	Bottom through hole	φ52(2-1/16) Knockout hole
⑦	For transmission cables	φ34(1-3/8) Knockout hole
⑧	Bottom through hole	φ34(1-3/8) Knockout hole

Unit: mm (in.)

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.