

Job Name:

Schedule Reference:

Date:



Minimum Operating Temperature
Heating (Outdoor): -25°F (-32°C) WB
Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

1. Nominal cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B.; (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
2. Nominal heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
3. Cooling mode/Heating mode
4. External static pressure option is available (0.12 in. WG, 0.24 in. WG, 0.32 in. WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

Outdoor Model				PURY-HP72TNU-A				
Indoor Model				Non-Ducted		Ducted		
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz				
Cooling capacity *1 (Nominal)			BTU/h	72,000				
			kW	21.1				
			(208-230)	Power input	kW	5.22		
				Current input	A	16.0-14.5		
			(Rated)	BTU/h	69,000			
				kW	20.2			
			(208-230)	Power input	kW	5.45	5.55	
				Current input	A	16.8-15.2	17.1-15.4	
Temp. range of cooling		Indoor	W.B.	59~75°F (15~24°C)				
		Outdoor	D.B.	23~126°F (-5~52°C)				
Heating capacity *2 (Nominal)			BTU/h	80,000				
			kW	23.4				
			(208-230)	Power input	kW	5.66		
				Current input	A	17.4-15.7		
			(Rated)	BTU/h	76,000			
				kW	22.3			
			(208-230)	Power input	kW	5.12	5.36	
				Current input	A	15.7-14.2	16.5-14.9	
Temp. range of heating		Indoor	D.B.	59~81°F (15~27°C)				
		Outdoor	W.B.	-22~60°F (-30~15.5°C)				
Indoor unit connectable		Total capacity		50~150% of outdoor unit capacity				
		Model/Quantity		P04~P96/1~18				
Sound power level (measured in anechoic room) *3			dB <A>	75.5/77.0				
Refrigerant	High pressure	in. (mm)	5/8 (15.88) Brazed					
piping diameter	Low pressure	in. (mm)	3/4 (19.05) Brazed					
Minimum Circuit Ampacity (*)			A	55-49				
Maximum Overcurrent Protection (*)			A	90-80				
FAN		Type x Quantity		Propeller fan x 2				
		Airflow rate	cfm	7,400				
			m3/min	210				
		Control, Driving mechanism		Inverter-control, Brushless DC motor				
		Motor output	kW	0.46+0.46				
		*4 External static press.		0 in.WG (0 Pa)				
Compressor		Type x Quantity		Inverter scroll hermetic compressor x 1				
		Starting method		Inverter				
		Motor output	kW	4.0				
		Case heater	kW	-				
		Lubricant		MEL46EH				
External finish			Pre-coated galvanized steel sheet <MUNSELL 5Y 8/1>					
External dimension H x W x D			in.	71-5/8 x 48-7/8 x 29-3/16				
			mm	1,818 x 1,240 x 740				
Protection devices		High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)				
		Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection				
		Fan motor		-				
Refrigerant		Type x original charge		R410A x 17 lbs + 10 oz (8.0 kg)				
		Control		Indoor LEV and BC controller				
Net weight			lbs (kg)	609 (276)				
Heat exchanger				Salt-resistant cross fin & copper tube				
HIC circuit (HIC: Heat Inter-Changer)				-				
Defrosting method				Auto-defrost mode (Reversed refrigerant cycle)				
Optional parts		Joint: CMY-Y102SS-G2,CMY-Y102LS-G2,CMY-R160-J1						
		CMY-R201,202,301,306S-G,CMY-R302,303,304,305S-G1						
		BC controller: CMB-P104,106,108,1012,1016NU-J1						
		Main BC controller: CMB-P108,1012,1016NU-JA1,CMB-P1016NU-KA1						
		Sub BC controller: CMB-P104,108NU-KB1						

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-HP72TNU-A - DIMENSIONS

Unit: mm (in.)


Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	High pressure	Low pressure	High pressure	Low pressure
HP72	ø13.5(3/8) Brazed*1	ø19.05(3/4) Brazed*1	ø28.58(1-1/8)	ø28.58(1-1/8)
HP96	ø19.05(3/4) Brazed*1	ø22.2(7/8) Brazed*1	ø28.58(1-1/8)	ø28.58(1-1/8)
HP120	ø19.05(3/4) Brazed*1	ø28.58(1-1/8) Brazed	ø28.58(1-1/8)	ø28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.

NO.	Usage	Specifications	
		Front through hole	Bottom through hole
①	For pipes	148(5-7/8) × 84(3-5/16) Knockout hole	150(5-15/16) × 94(3-3/4) Knockout hole
②		150(5-15/16) × 94(3-3/4) Knockout hole	150(5-15/16) × 94(3-3/4) Knockout hole
③	For wires	Front through hole ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole	Front through hole ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④		Front through hole ø43.7(1-3/4) or ø22.2(7/8) Knockout hole	Front through hole ø43.7(1-3/4) or ø22.2(7/8) Knockout hole
⑤		Bottom through hole ø65(2-9/16) Knockout hole	Bottom through hole ø65(2-9/16) Knockout hole
⑥		Bottom through hole ø52(2-1/16) Knockout hole	Bottom through hole ø52(2-1/16) Knockout hole
⑦	For transmission cables	Front through hole ø34(1-3/8) Knockout hole	Front through hole ø34(1-3/8) Knockout hole
⑧		Bottom through hole ø34(1-3/8) Knockout hole	Bottom through hole ø34(1-3/8) Knockout hole

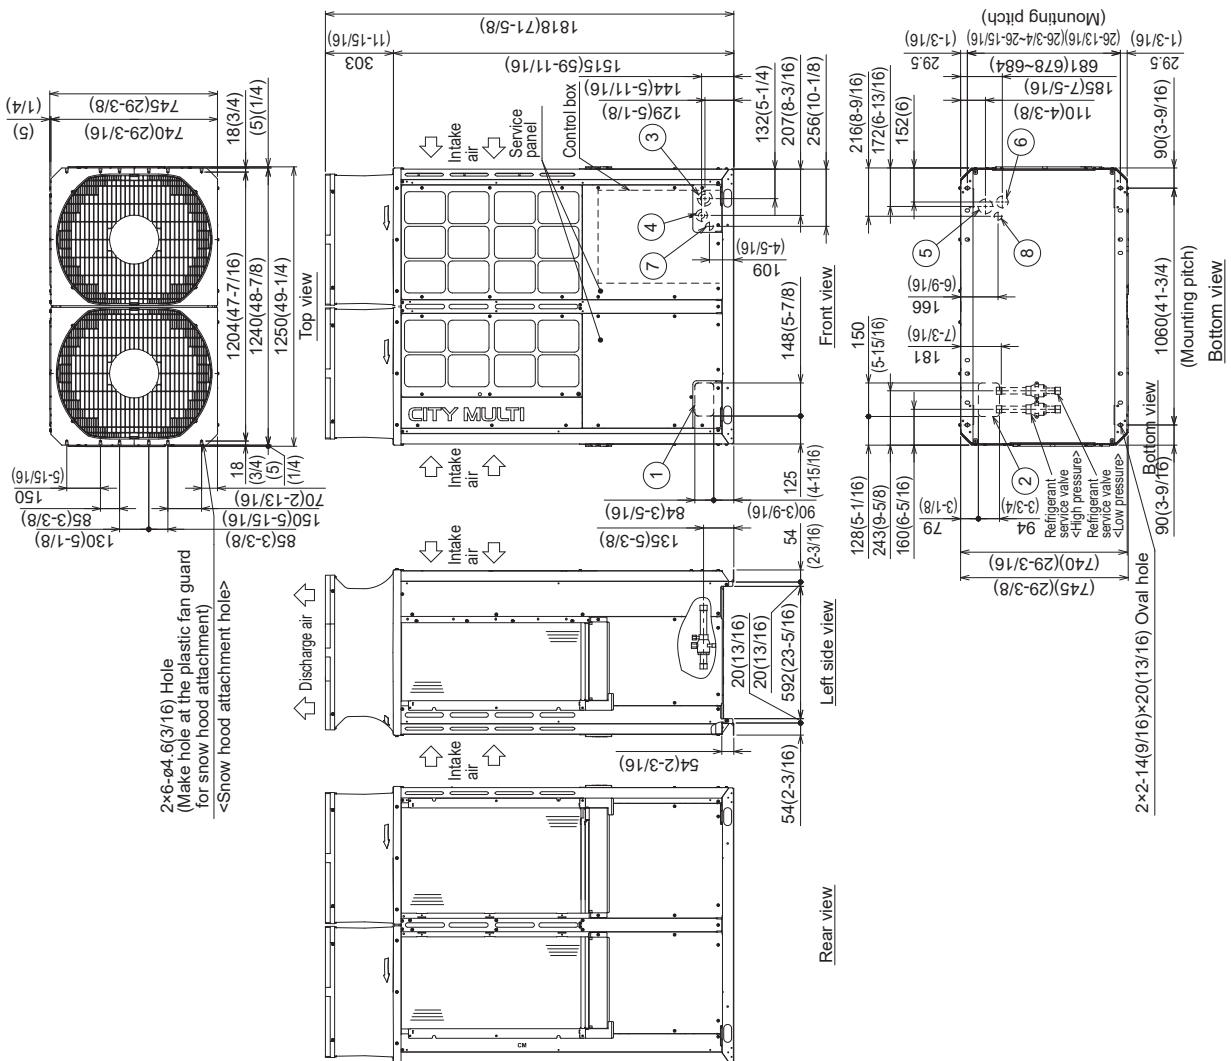

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.