

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PURY-P288TSNU-A1

Seacoast (BS) Model PURY-P288TSNU-A1-BS

Minimum Operating Temperature
Heating (Outdoor): -25°F (-32°C) WB
Below -22°F (-30°C) WB,
an auxiliary heating source is highly recommended.
System requires firmware Ver. 26.35 or later.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E) (x2)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Outdoor Model				PURY-P288TSNU-A1 (-BS)	
Indoor Model				Non-Ducted	Ducted
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz	
Cooling capacity *1 (Nominal)			BTU/h	288,000	
			kW	84.4	
(208-230)			Power input	26.47	
			Current input	81.6-73.8	
(Rated)			BTU/h	276,000	
			kW	80.9	
(208-230)			Power input	29.07	28.99
			Current input	89.6-81.0	89.4-80.8
Temp. range of cooling			Indoor	W.B. 59~75°F (15~24°C)	
			Outdoor	D.B. 23~126°F (-5~52°C)	
Heating capacity *2 (Nominal)			BTU/h	323,000	
			kW	94.7	
(208-230)			Power input	27.65	
			Current input	85.2-77.1	
(Rated)			BTU/h	304,000	
			kW	89.1	
(208-230)			Power input	25.30	25.52
			Current input	78.0-70.5	78.7-71.1
Temp. range of heating *3			Indoor	D.B. 59~81°F (15~27°C)	
			Outdoor	W.B. -13~60°F (-25~15.5°C)	
Indoor unit connectable			Total capacity	50~150% of outdoor unit capacity	
			Model/Quantity	P04~P96/2~50	
Sound power level (measured in anechoic room) *4			dB <A>	88.5/88.5	
Refrigerant			High pressure	in. (mm) 1-1/8 (28.58) Brazed	
piping diameter			Low pressure	in. (mm) 1-3/8 (34.93) Brazed	

Set Model

Model			PURY-P144TNU-A1 (-BS)	PURY-P144TNU-A1 (-BS)
Minimum Circuit Ampacity (*)		A	60-55	60-55
Maximum Overcurrent Protection (*)		A	100-90	100-90
FAN	Type x Quantity		Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm	9,550	9,550
		m3/min	270	270
	Control, Driving mechanism		Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW	0.46+0.46	0.46+0.46
	*5 External static press.		0 in.WG (0 Pa)	0 in.WG (0 Pa)
Compressor	Type x Quantity		Inverter scroll hermetic compressor x1	Inverter scroll hermetic compressor x1
	Starting method		Inverter	Inverter
	Motor output	kW	9.9	9.9
	Case heater	kW	0.045	0.045
		MEL32	MEL32	
External finish			Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>
External dimension H x W x D		in.	71-5/8 x 48-7/8 x 29-3/16	71-5/8 x 48-7/8 x 29-3/16
		mm	1,818 x 1,240 x 740	1,818 x 1,240 x 740
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection
	Fan motor		-	-
Refrigerant	Type x original charge		R410A x 23 lbs + 12 oz (10.8 kg)	R410A x 23 lbs + 12 oz (10.8 kg)
	Control		Indoor LEV and BC controller	
Net weight		lbs (kg)	646 (293)	646 (293)
Heat exchanger			Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube
HIC circuit (HIC: Heat Inter-Changer)			-	-
Pipe between unit and distributor	High pressure	in. (mm)	7/8 (22.2) Brazed	7/8 (22.2) Brazed
	Low pressure	in. (mm)	1-1/8 (28.58) Brazed	1-1/8 (28.58) Brazed
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle)	
Optional parts	Outdoor Twinning kit: CMY-R300NCBK			
	Joint: CMY-Y102SS-G2,CMY-Y102LS-G2,CMY-Y202S-G2,CMY-R160-J1			
	CMY-R201,202,203,204,205,306S-G, CMY-R302,303,304,305S-G1			
	Main BC controller: CMB-P108,1012,1016NU-JA2,CMB-P1016NU-KA2			
	Sub BC controller: CMB-P104,108NU-KB2			

Notes:


- 1.Nominal cooling conditions (Test conditions are based on AHR11230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
 - 2.Nominal heating conditions (Test conditions are based on AHR11230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
 - 3.When applying product below -4°F, consult your design engineer for cold climate application best practices, including the use of a backup source for heating.
 - 4.Cooling mode/Heating mode
 - 5.External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).
- * Due to continuing improvement, above specifications may be subject to change without notice.

Specifications are subject to change without notice.

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-P288TSNU-A1(-BS) - DIMENSIONS

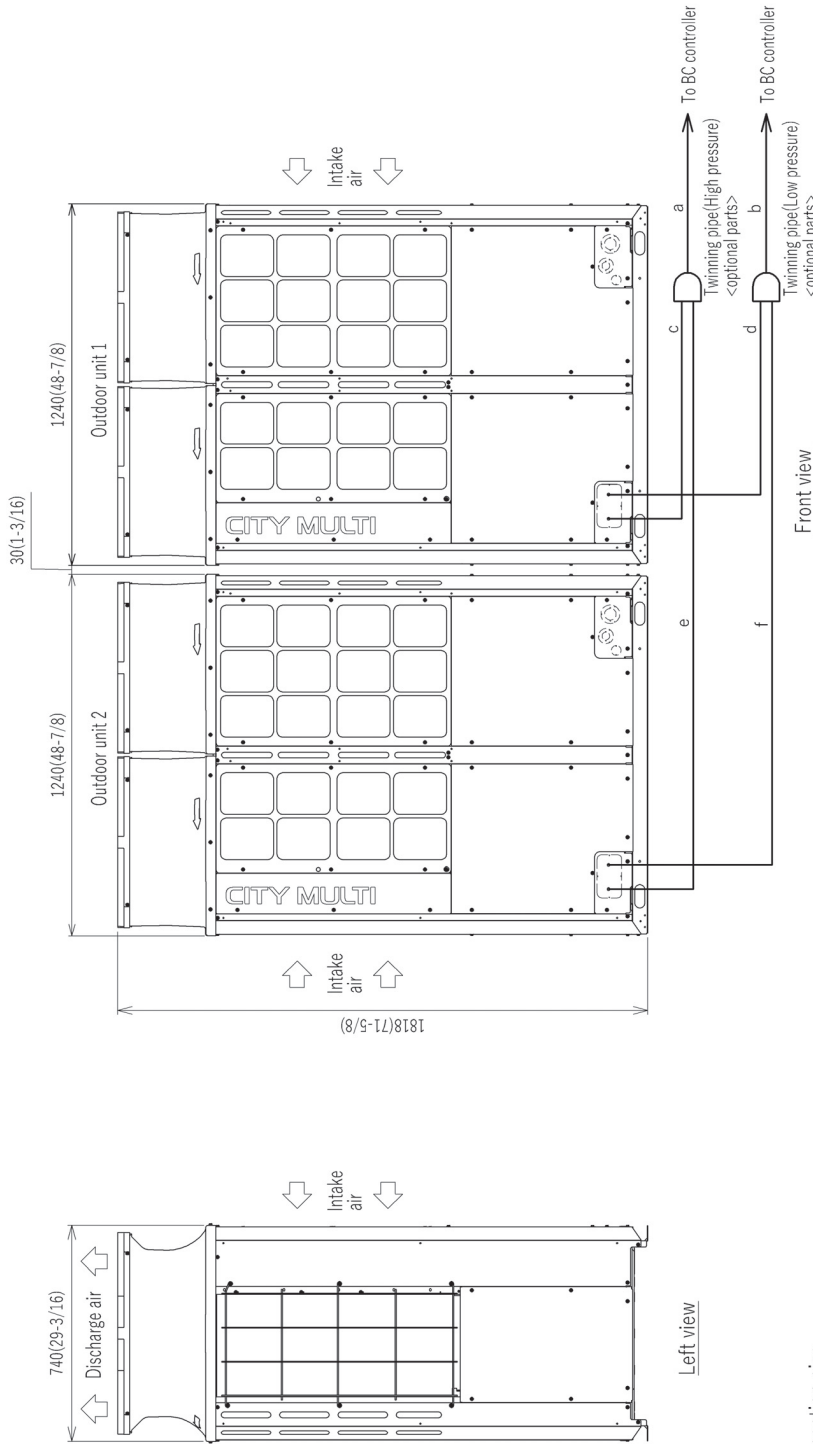

Twinning pipe connection size

Package unit name	(E)P192T/YSNU	P216T/YSNU	EP216T/YSNU	(E)P240T/YSNU	(E)P264T/YSNU	(E)P288T/YSNU
Component unit name	Outdoor unit 1	P120T/YSNU	EP120T/YSNU	(E)P120T/YSNU	(E)P144T/YSNU	(E)P144T/YSNU
Outdoor Twinning Kit(optional parts)	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R300NCBK	CMY-R300NCBK
BC controller	~Twinning pipe	High pressure a	Low pressure b	High pressure c	Low pressure d	High pressure e
Twinning pipe	~Outdoor unit 1	~Outdoor unit 2	~Outdoor unit 1	~Outdoor unit 2	~Outdoor unit 1	~Outdoor unit 2
	High pressure a	Low pressure b	High pressure c	Low pressure d	High pressure e	Low pressure f
	φ 22.2(7/8)	φ 28.58(1-1/8)	φ 19.05(3/4)	φ 28.58(1-1/8)	φ 28.58(1-1/8)	φ 28.58(1-1/8)
	φ 28.58(1-1/8)	φ 19.05(3/4)	φ 28.58(1-1/8)	φ 19.05(3/4)	φ 28.58(1-1/8)	φ 28.58(1-1/8)
	φ 19.05(3/4)	φ 22.2(7/8)	φ 19.05(3/4)	φ 22.2(7/8)	φ 19.05(3/4)	φ 22.2(7/8)
	φ 22.2(7/8)	φ 28.58(1-1/8)	φ 22.2(7/8)	φ 28.58(1-1/8)	φ 22.2(7/8)	φ 28.58(1-1/8)

* When the piping length is 65m(213ft) or longer, use the φ 28.58(1-1/8) pipe for the part that exceeds 65m(213ft).

- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
- Note 2. Twinning pipes must be installed horizontally using a level vessel.
- Note 3. Be sure to see the Installation Manual for details of Twinning pipe installation.
- Note 4. The pipe section before the Twinning pipe (section "a" and "b" in the figure) must have at least 500mm(19-11/16) of straight section. (* including the straight pipe that is supplied with the Twinning pipe).
- Note 5. Only use the Twinning pipe by Mitsubishi (optional parts).

Unit: mm (in.)

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-P144TNU-A1(-BS) - DIMENSIONS


Unit: mm (in.)

Connecting pipe specifications

Model	Refrigerant pipe "1		Diameter
	High pressure	Low pressure	
(E)P96	φ 19.05(3/4)	Brazed φ 22.2(7/8)	Brazed φ 28.58(1-1/8)
(E)P20	φ 19.05(3/4)	Brazed φ 28.38(1-1/8)	Brazed φ 28.58(1-1/8)
(E)P44	φ 22.2(7/8)	Brazed φ 28.38(1-1/8)	Brazed φ 28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.

No.	Usage	Specifications
①	Front trough hole	148(5-7/8) X 84(3-1/16) Knockout hole
②	For pipes	Bottom trough hole $\phi 150(2-1/16)$ X 94(3-1/4) Knockout hole
③		Front trough hole $\phi 62(1-1/2)$ X $\phi 34(1-3/8)$ Knockout hole
④		Front trough hole $\phi 43(1-3/4)$ X $\phi 22(7/8)$ Knockout hole
⑤	For wires	Bottom trough hole $\phi 55(2-1/16)$ Knockout hole
⑥		Bottom trough hole $\phi 52(2-1/16)$ Knockout hole
⑦	For transmission	Front trough hole $\phi 34(1-3/8)$ Knockout hole
⑧		Bottom trough hole $4-23(1-7/8)$ Knockout hole

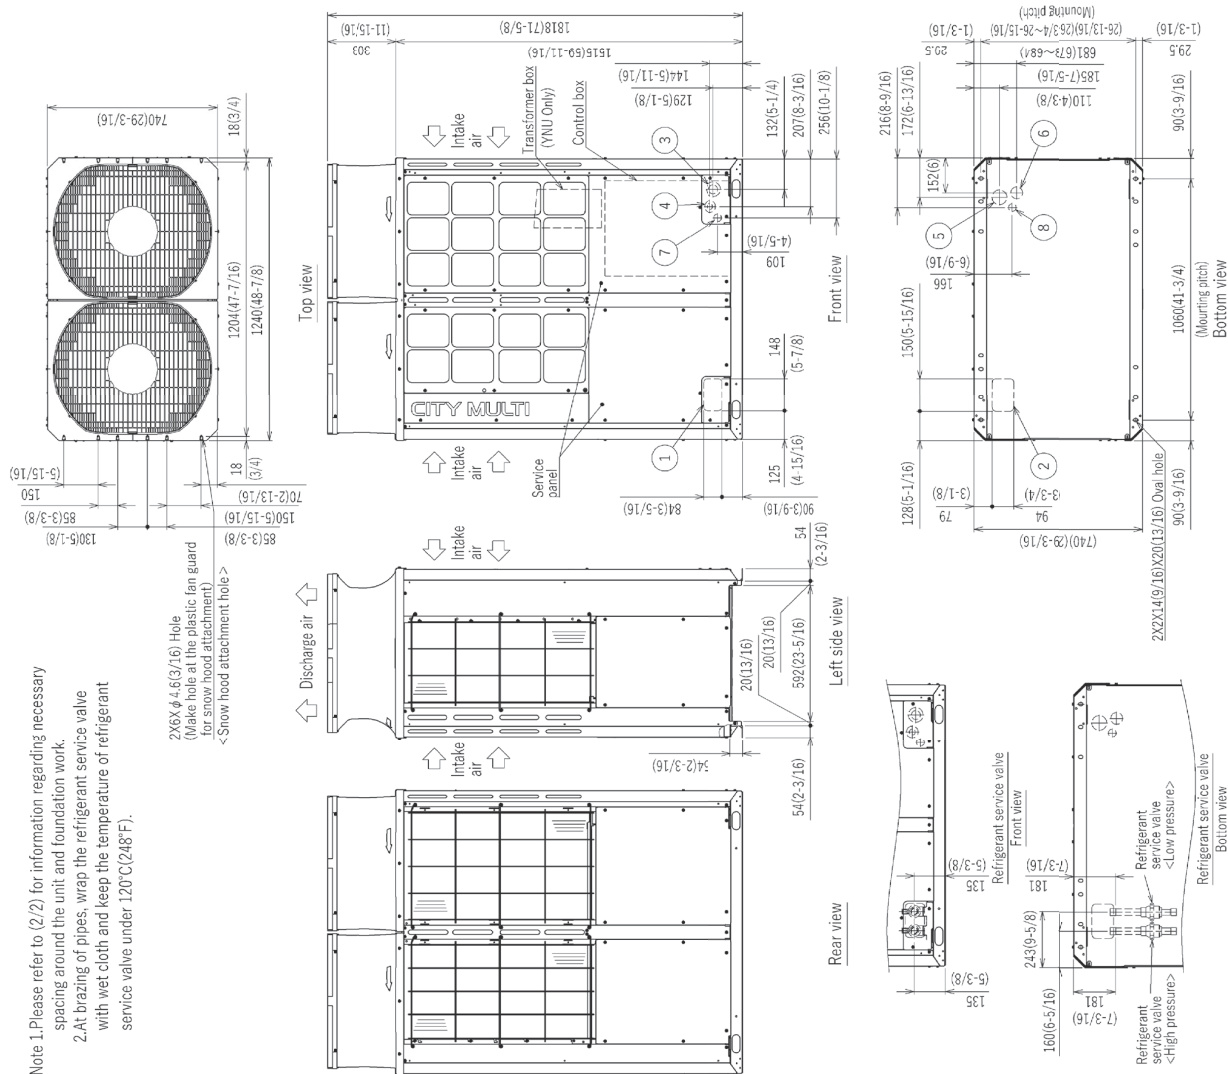

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.