

SUBMITTAL DATA: PVA-A30AA7 & PUZ-A30NHA7

30,000 BTU/H AIR HANDLER AIR-CONDITIONING SYSTEM

Job Name:	Engineer:
Purchaser:	Application:
Submitted To:	For: ☐ Reference ☐ Approval ☐ Construction
Submitted By:	Location:
System Designation:	Schedule No.:



Indoor Unit: PVA-A30AA7



Outdoor Unit: PUZ-A30NHA7 (BS)

UNIT OPTION:

Standard Model.....PUZ-A30NHA7
Seacoast (BS) Model.....PUZ-A30NHA7-BS

ACCESSORIES:

Indoor Unit

External Heating Adaptor (PAC-YU25HT)
Electric Heat Kitsee.....SB_EH_MVZ_PVA_PVfy_SVZ

Controls

Wireless Controller (MHK1)
Advanced Wired Controller (PAR-32MAA / PAR-33MAA)
Simple Wired Controller (PAC-YT53CRAU)
Wireless Remote Controller (PAR-FL32MA) + Wireless Signal Receiver (PAR-FA32MA)
Thermostat Interface (PAC-US444CN)
M-NET Adapter (PAC-SF83MA-E)

Outdoor Unit

Front Wind Guard (PFR-24-30)
Rear Wind Guard (PRE-24-30)
Side Wind Guard (PSD-24-30)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	30,000 / 3,000
Heating at 47° F	Btu/h / W	32,000 / 2,640
Heating at 17° F	Btu/h / W	18,000 / 2,110

* Rating Conditions per AHRI Standard:
Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB; Outdoor: 95° F (35° C) DB / 75° F (24° C) WB
Heating at 47° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB; Outdoor: 47° F (8° C) DB / 43° F (6° C) WB
Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB; Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB

Capacity Range		
Cooling	Btu/h	10,000 - 30,000
Heating at 47° F	Btu/h	12,000 - 34,000

Operating Range		
Cooling	0°F** (-18°C) to 115°F (46°C) DB	
Heating	-4°F (-20°C) to 70°F (21°C) DB	

** Windscreens required for cooling operation below 23°F (-5°C)

AHRI Efficiency Rating	
EER	10.0
SEER	19.0
HSPF IV / V	10.0 / 7.5
COP at 47° F	3.55
COP at 17° F	2.50

Specifications are subject to change without notice.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA) *	Breaker Size	MOCP (Outdoor)
Indoor 4.13 AMP	Outdoor 19 AMP	25 AMP
		26 AMP

***All electrical work shall comply with National (CEC) and local codes and regulations.**

Blower Motor (ECM)	F.L.A.	3.3
Blower Motor Output	W	244
SHF / Moisture Removal		0.74 / 5.4 pt./h
External Static Pressure	In. WG	0.30-0.50-0.80

Outdoor Unit		
Compressor		DC INVERTER-driven Scroll
Fan Motor (ECM)	F.L.A.	0.4
Fan Motor Power	W	86

Airflow Rate (Low-Mid-Hi)			
Indoor (Cooling)	DRY	CFM	613-744-875
	WET		NA
Outdoor	DRY		1,940

Sound Pressure Level			
Indoor (Low-Mid-Hi)		dB(A)	30-34-38
Outdoor	Cooling		47
	Heating		48

External Dimensions		
Indoor (H x W x D)	In.(mm)	54-1/4 x 21 x 21-5/8 (1378 x 534 x 548)
Outdoor (H x W x D)		37-1/8 x 37-13/32 x 13 + 1-3/16 (943 x 950 x 330 + 30)

Net Weight		
Indoor	Lbs.(kg)	141 (64)
Outdoor		153 (69)

External Finish	
Indoor	Galvanized steel cabinet-Powder coated Slate Grey
Outdoor	Ivory Munsell No. 3Y 7.8 / 1.1


Refrigerant	R410A ; 7lbs., 11oz. (3.5kg)
-------------	------------------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)
Maximum Total Refrigerant Pipe Length	Ft. (m)	165 (50)
Maximum Vertical Separation	Ft. (m)	100 (30)






Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

FAN PERFORMANCE AND CORRECTED AIR FLOW - PVA-A30AA7

• Vertical, Horizontal Right, Horizontal Left

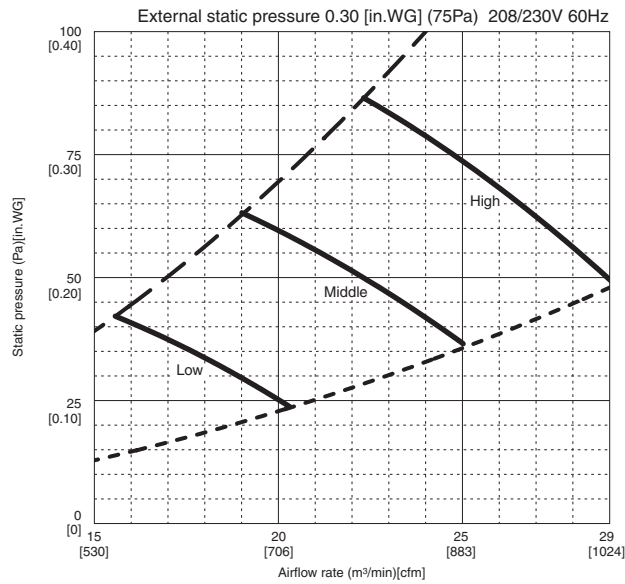


• Downflow

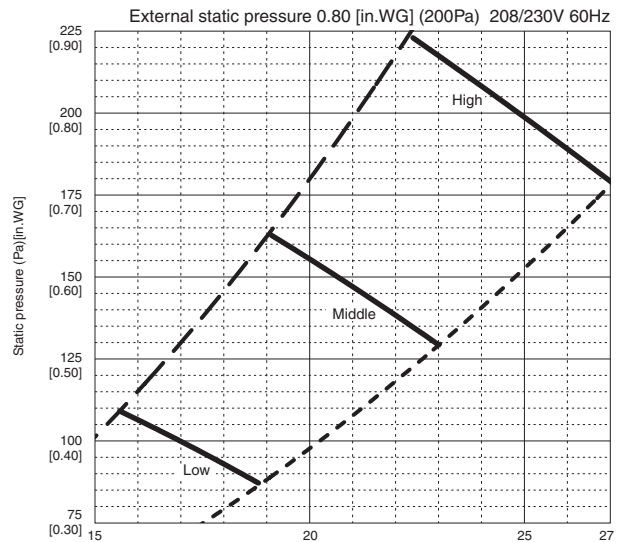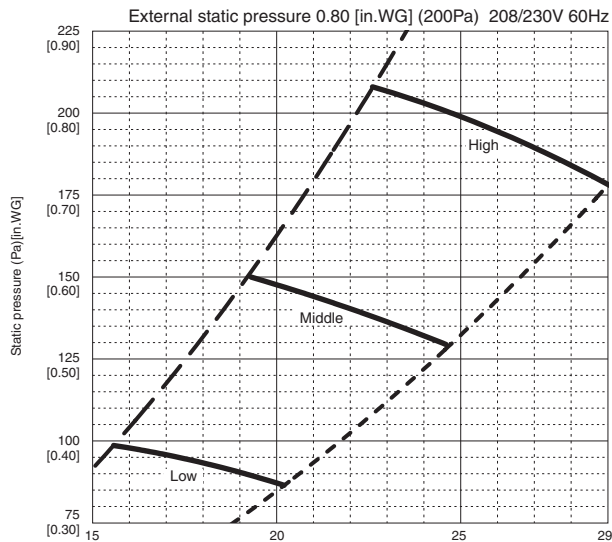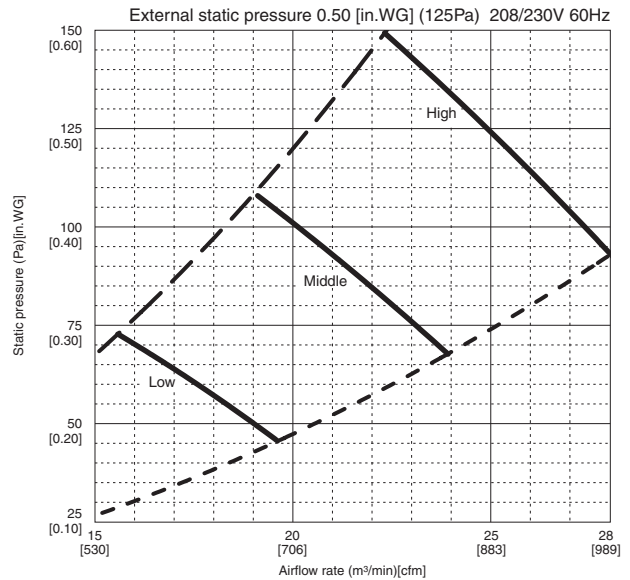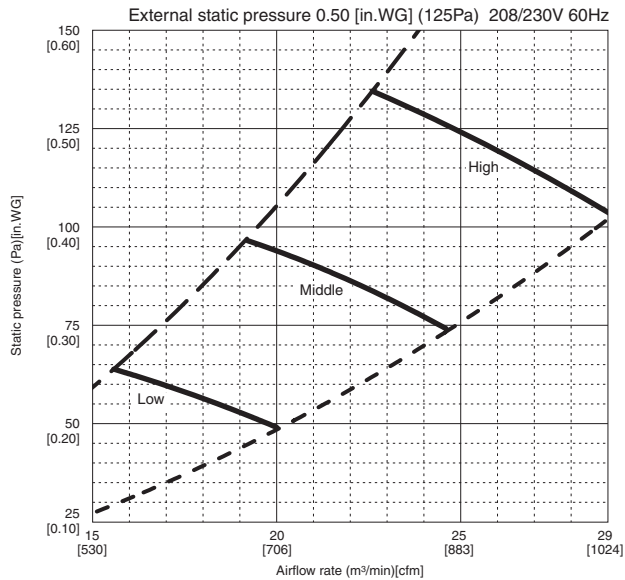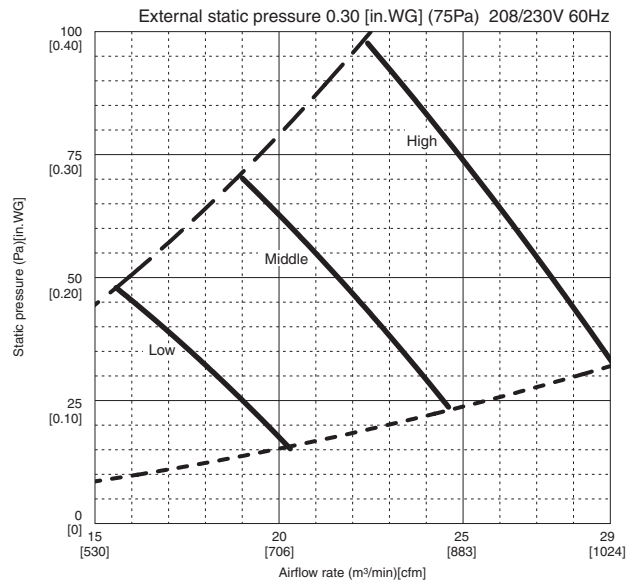

Specifications are subject to change without notice.

DIMENSIONS: PVA-A30AA7

Unit: mm (in.)

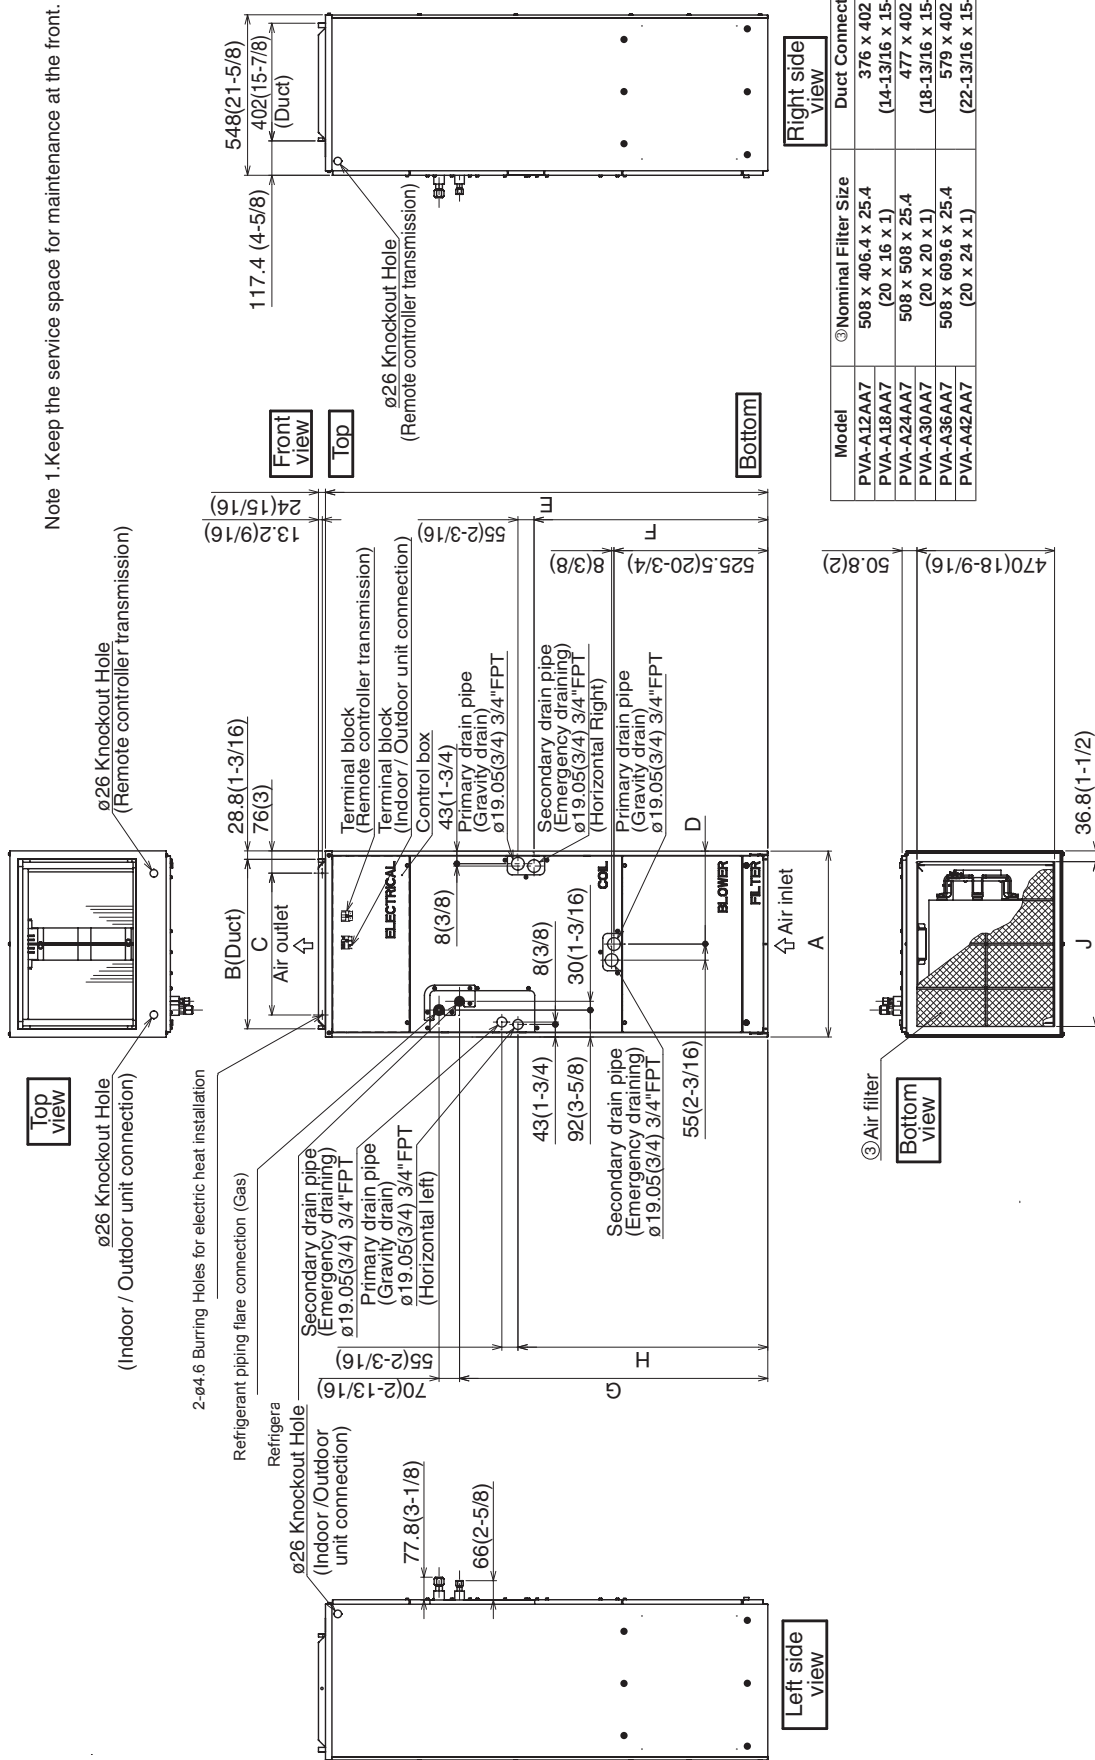

Note 1. Keep the service space for maintenance at the front.

Model	③ Nominal Filter Size	Duct Connection
PVA-A12AA7	508 x 406.4 x 25.4 (20 x 16 x 1)	376 x 402 (14-13/16 x 15-7/8)
PVA-A18AA7	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)
PVA-A24AA7	508 x 609.6 x 25.4 (20 x 24 x 1)	579 x 402 (22-13/16 x 15-7/8)


Model	A	B	C	D	E	F	G	H	J	① Gas Pipe	② Liquid Pipe
PVA-A12AA7	432 (17)	376 (14-13/16)	281 (11-1/8)	224 (8-7/8)	1275 (50-1/4)	680 (26-13/16)	823 (32-7/16)	735.5 (29)	360 (14-3/16)	Φ 12.7 (1/2)	Φ 6.35 (1/4)
PVA-A18AA7	534 (21)	477 (18-13/16)	382.6 (15-1/8)	266.5 (10-1/2)	1378 (54-1/4)	737 (29-1/16)	953.5 (37-9/16)	792 (31-3/16)	461 (18-3/16)	Φ 15.88 (5/8)	Φ 9.52 (3/8)
PVA-A24AA7	635 (25)	579 (22-13/16)	484.6 (19-1/8)	317.5 (12-1/2)	1511 (59-1/2)	798.5 (31-7/16)	1053 (41-1/2)	853.5 (33-5/8)	563 (22-3/16)		

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.


DIMENSIONS: PVA-A30AA7

Unit: mm (in.)

Clearance Area

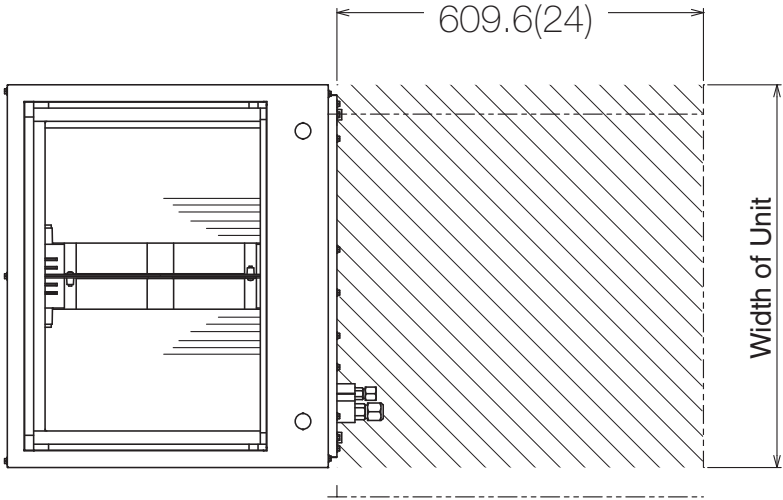

Vertical Installation

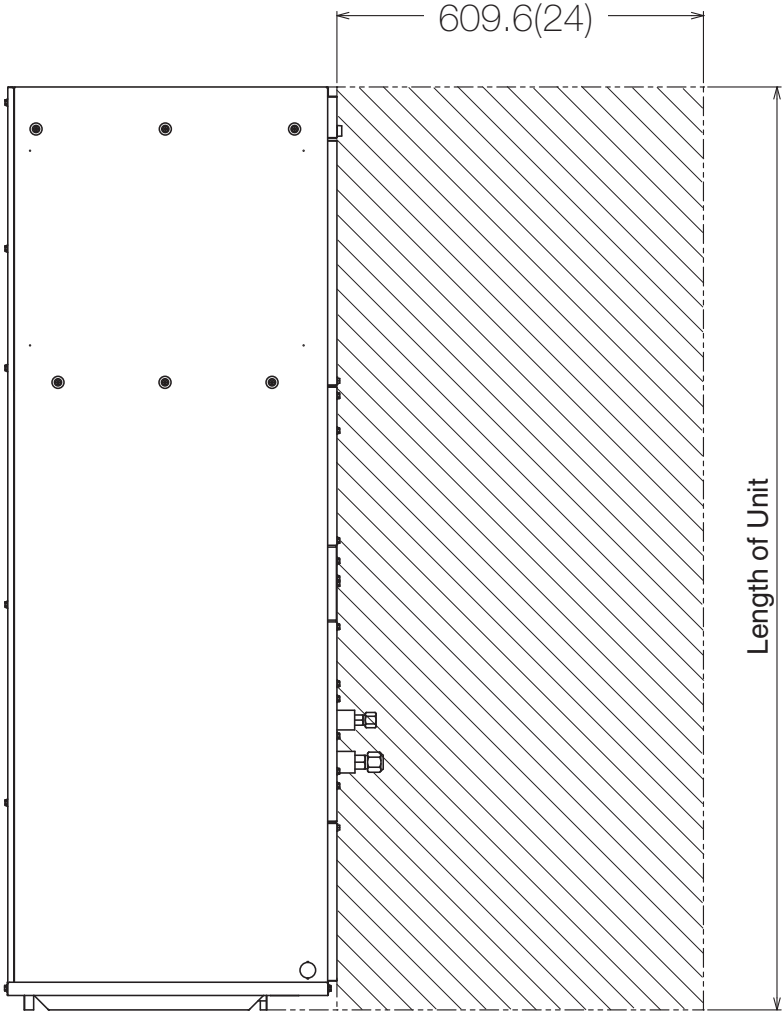




Horizontal Installation

Specifications are subject to change without notice.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.*

DIMENSIONS: PUZ-A30NHA7


Unit: mm (in.)

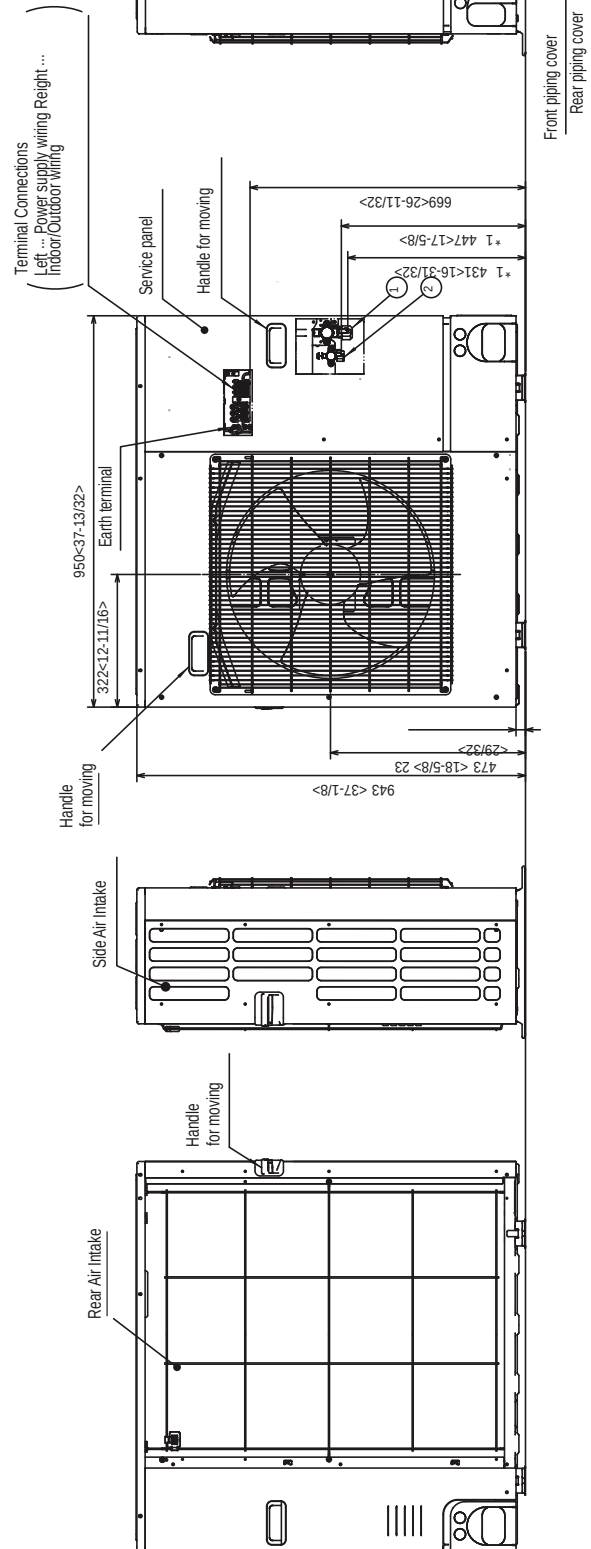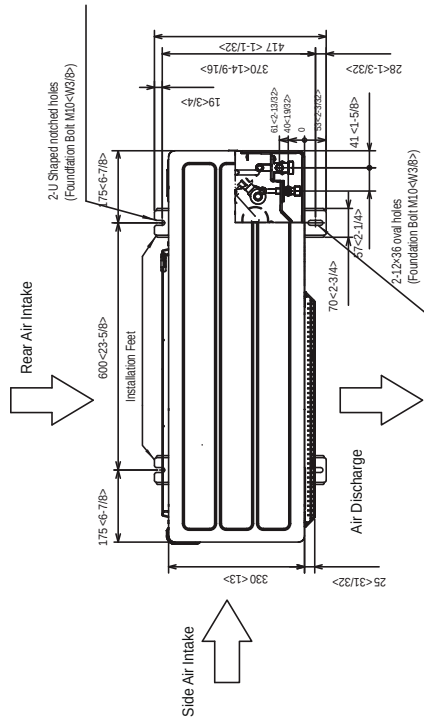

Indoor-Outdoor S1-S2* 208/230Vac
Indoor-Outdoor S2-S3* 24Vdc
Indoor remote controller 12Vdc

* Max. wire length 165ft. (50.3m)

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

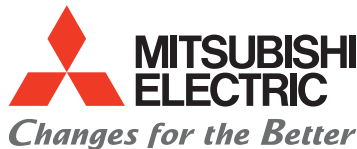

for a greener tomorrow

