

Job Name:	Location:		
Purchaser:	Submitted By:		
Submitted To:	Reference:	Approval:	Construction:
Engineer:	Date:	Application:	



Optional Controller

Images provided for reference purposes only

Outdoor Standard Features:	Description:
Blue Fin Coating	Prolong condenser operating life
Inverter Motor	Energy efficient operation with variable speed DC motor
Built in base pan heater	Automated control to prevent premature failure of condenser coil
Auto mode	Automatically switches between heating & cooling modes
Fast Auto restart	Automatically restarts after power failure return
Auxiliary heat lock out	Prevents premature activation of aux. heat
Automated compressor cutout	Prevents inefficient operation & protects compressor
Cold climate heat pump	
Indoor Standard Features:	Description:
Multi position	Increases application in tight spaces
Less than 2% air leakage	At 1.0 in. WG, ASHRAE standard 193
Built in humidification & ventilation controls	Controls humidifier and ventilator
Direct auxiliary heat control	Heat pump system controls aux. heat
Condensate overflow fail safe	CN4F, condensate overflow safety switch connector
Description: (Optional Accessories)	Model No.
Front Windscreen	CM-S-FR-NKMU (x2 required)
Front Windscreen Blocker	CM-S-BLK-NKMU (x2 per box)
Rear Snow Guard	SG-1-RE
Side Snow Guard	SG-1-SD
Return Air Intake	PV-RTN-36-42
Electric Heater Kit - 10kW	EH10-MPA-LB
Electric Heater Kit - 15kW	EH15-MPAS-LB
Electric Heater Kit - 17kW	EH17-MPAS-LB
Terminal Block Kit	SPTB1

**Note:**

- Mitsubishi Electric Sales Canada Inc. (MESCA) supports the use of only MESCA supplied and approved components and accessories for proper functioning of the unit(s). Use of non - MESCA supported components and accessories will affect warranty coverage. MESCA recommends (A) consideration of all applicable design and application parameters and requirements specific to any project.
- Should any person change this document in any manner whatsoever without MESCA's written permission, the document shall be of no force and effect and any change shall be deemed to be a representation and warranty made by that person and not MESCA. That person, and not MESCA, shall assume full responsibility for the consequences of such changes. MESCA assumes no responsibility for any consequences in such cases.

## Performance:

Cooling at 95°F <sup>1</sup>	Rated Capacity	Btu/h	42,000
	Capacity Range	Btu/h	17,000 - 42,000
	Rated Power Input	W	3,960
	Power Input Range	W	1,320 - 3,960
	Moisture Removal	pints/h	5.3
	Sensible Heat Factor		0.86
Heating at 47°F <sup>2</sup>	Rated Capacity	Btu/h	48,000
	Capacity Range	Btu/h	23,900 - 54,000
	Rated Power Input	W	3,850
	Power Input Range	W	1,720 - 4,570
Heating at 17°F <sup>3</sup>	Maximum Capacity	Btu/h	48,000
	Rated Capacity	Btu/h	38,500
	Capacity Range	Btu/h	NA - 48,000
	Maximum Power Input	W	6,635
	Rated Power Input	W	4,925
	Power Input Range	W	NA - 6,635
Heating at 5°F <sup>4</sup>	Maximum Capacity	Btu/h	48,000
	Maximum Power Input	W	7,084
Heating at -13°F <sup>5</sup>	Maximum Capacity	Btu/h	38,400
	Maximum Power Input	W	7,236

## Efficiency:

SEER / SEER2		15.4 / 15.4
EER <sup>1</sup> / EER2		10.6 / 9.8
HSPF (IV) / HSPF2 (V)		10.0 / 7.9
COP at 47°F <sup>2</sup>	Rated Capacity	3.65
COP at 17°F <sup>3</sup>	Maximum Capacity	2.12
COP at 5°F <sup>4</sup> / -13°F	Maximum Capacity	1.91 / 1.55

## Electrical:

Power Supply		208/230V, 1Ph, 60Hz
Voltage: Indoor - Outdoor, S1-S2	V AC	AC 208/230V
Voltage: Indoor - Outdoor, S2-S3	V DC	DC 24V
Short-circuit Current Rating (SCCR)	kA	5
Recommended Fuse/Breaker Size (Outdoor)	A	40
Recommended Wire Size (Indoor - Outdoor)	AWG	14

## Outdoor Operating Temperature Range:

Cooling Operation Air Temp (Maximum / Minimum)*	°F (°C)	* 0 to 115 (-18 to 46)
Cooling Operation Thermal Lock-out / Re-start Temperatures	°F (°C)	-1 / 3 (-18 / -16)
Heating Operation Air Temp (Maximum / Minimum)	°F (°C)	-13 to 75 (-25 to 24)
Heating Operation Thermal Lock-out / Re-start Temperatures	°F (°C)	-22 / -13 (-30 / -25)

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) (\* Windscreens required for cooling operations below 23°F (-5°C))

<sup>1</sup>Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB

<sup>2</sup>Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB

<sup>3</sup>Heating at 17°F (-8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 17°F (-8.3°C) DB, 15°F (-9.4°C) WB

Rated conditions:

<sup>4</sup>Heating at 5°F (-15°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 5°F (-15°C) DB, 4°F (-15.6°C) WB

<sup>5</sup>Heating at -13°F (-25°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // -13°F (-25°C) DB, -15°F (-26.1°C) WB

Notes:

## Indoor Unit Specifications:

MCA	A	5.63
MOCB (only used with SPTB1 powering Indoor separately)	A	15
Blower Motor Full Load Amperage	A	4.50
Blower Motor Output	W	430
External Static Pressure	in WG	0.30 - 0.50 - 0.80
Airflow Rate at Cooling, Dry	CFM	1,040 - 1,262 - 1,485
Airflow Rate at Cooling, Wet	CFM	NA
Airflow Rate at Heating, Dry	CFM	1,040 - 1,262 - 1,485
Sound Pressure Level (Cooling)	dB(A)	36 - 40 - 44
Sound Pressure Level (Heating)	dB(A)	36 - 40 - 44
Drain Pipe Size	In. (mm)	3/4 (19)
External Finish Color	Galvanized steel cabinet - Powder coated Slate Gray	
Unit Dimensions	W: In. (mm)	25 (635)
	D: In. (mm)	21-5/8 (548)
	H: In. (mm)	59-1/2 (1,511)
Unit Weight	Lbs. (kg)	172 (78)

## Outdoor Unit Specifications:

MCA	A	36
MOCB	A	60
Fan Motor Output	W	74 + 74
Airflow Rate (Cooling/Heating)	CFM	3,319/ 3,319
Sound Pressure Level, Cooling1	dB(A)	49
Sound Pressure Level, Heating2	dB(A)	51
Refrigerant Control	LEV	
Compressor Oil Type / Charge	oz.	FVC68D / 57 oz
External Finish Color	Ivory Munsell No.3Y 7.8/1.1	
Unit Weight	Lbs. (kg)	283 (128)
Unit Dimensions	W: In. (mm)	41-11/32 (1,050)
	D: In. (mm)	12-63/64 + 63/64 (330 +25)
	H: In. (mm)	52-43/64 (1,338)
Gas Pipe Size O.D. (Flared)	In. (mm)	5/8 (15.88)
Liquid Pipe Size O.D. (Flared)	In. (mm)	3/8 (9.52)
Maximum Piping Length	Ft. (m)	245 (75)
Maximum Height Difference	Ft. (m)	100 (30)







## Description: (Optional Controls)

## Model No.

Building automated system DDC Interface	MELCO-RETAIL-MINI
Building automated system BacNet Interface	MELCO-BEMS-MINI
Simple thermostat Interface	PAC-US444CN-1
Operation/error display adapter	PAC-SA88HA-EP
Remote ON/OFF control	PAC-SE55RA-E
Remote compress ON/OFF control	PAC-SC36NA-E
Wireless remote receiver	PAR-FA32MA-E
Wired wall mounted remote control	PAR-41MAA
Wireless wall mounted remote control	MHK2
Touch screen wired wall mounted control	PAR-CT01MAU-SB
Basic wired wall mounted control	PAC-YT53CRAU-J
External heat control adapter	PAC-YU25HT-G
Heater control relay	PAM-4
Deluxe thermostat interface	RMF-CA100-V1
MNet adapter (BacNet/LonWorks BAS sub interface)	PAC-SJ95MA-E


## Fan Performance and Corrected Airflow:

• Vertical, Horizontal Right, Horizontal Left • Downflow

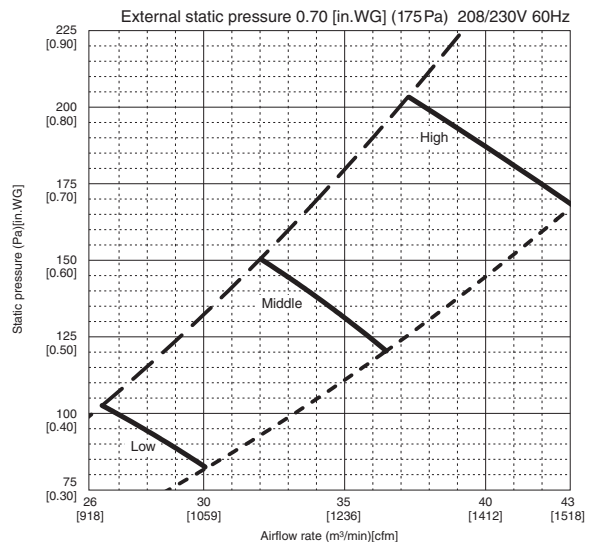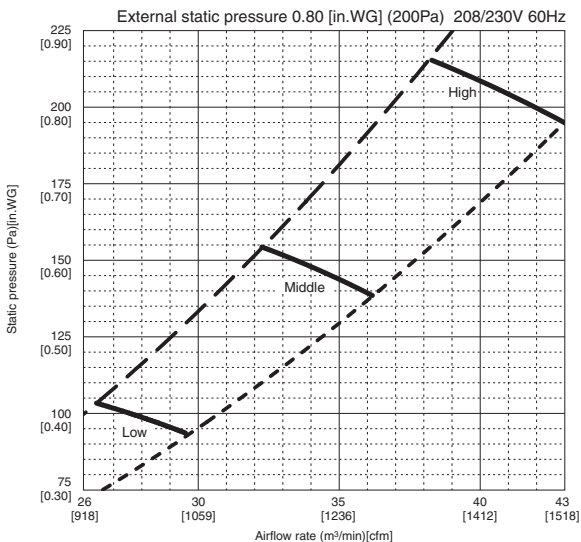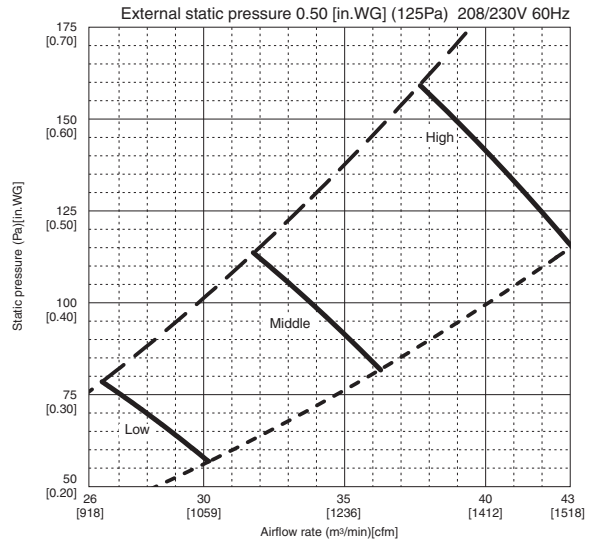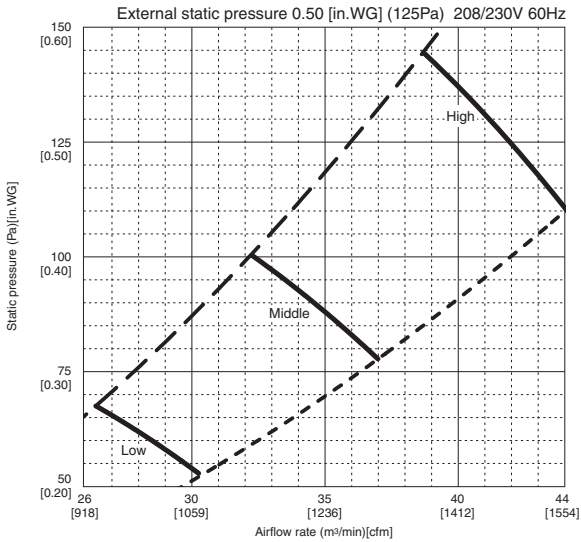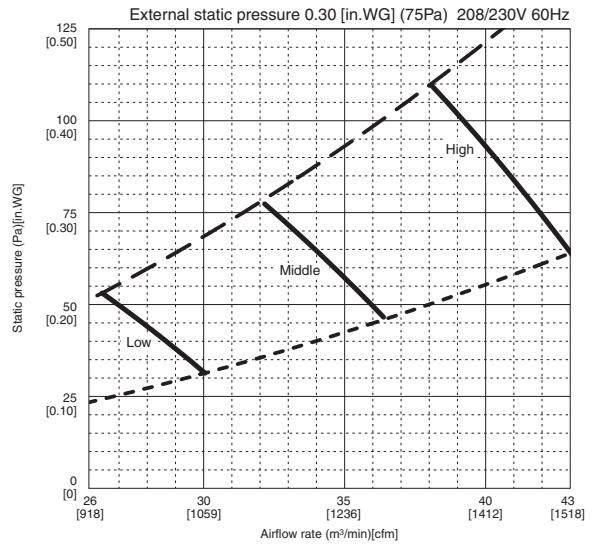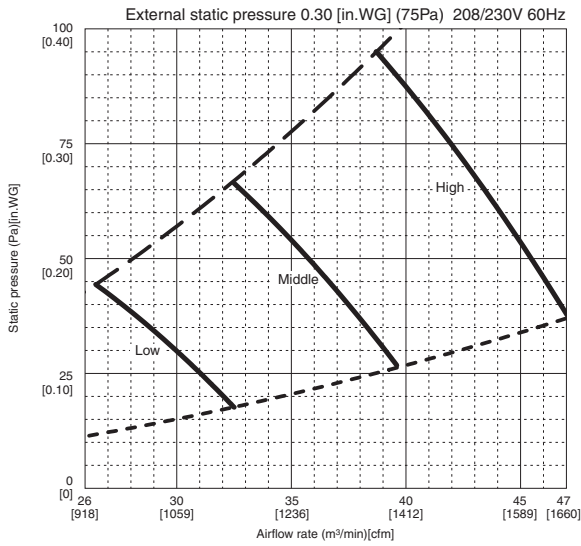

## Indoor Unit Outline and Dimensions:

Unit:mm(in.)  
Note 1. Keep the service space for maintenance at the front.

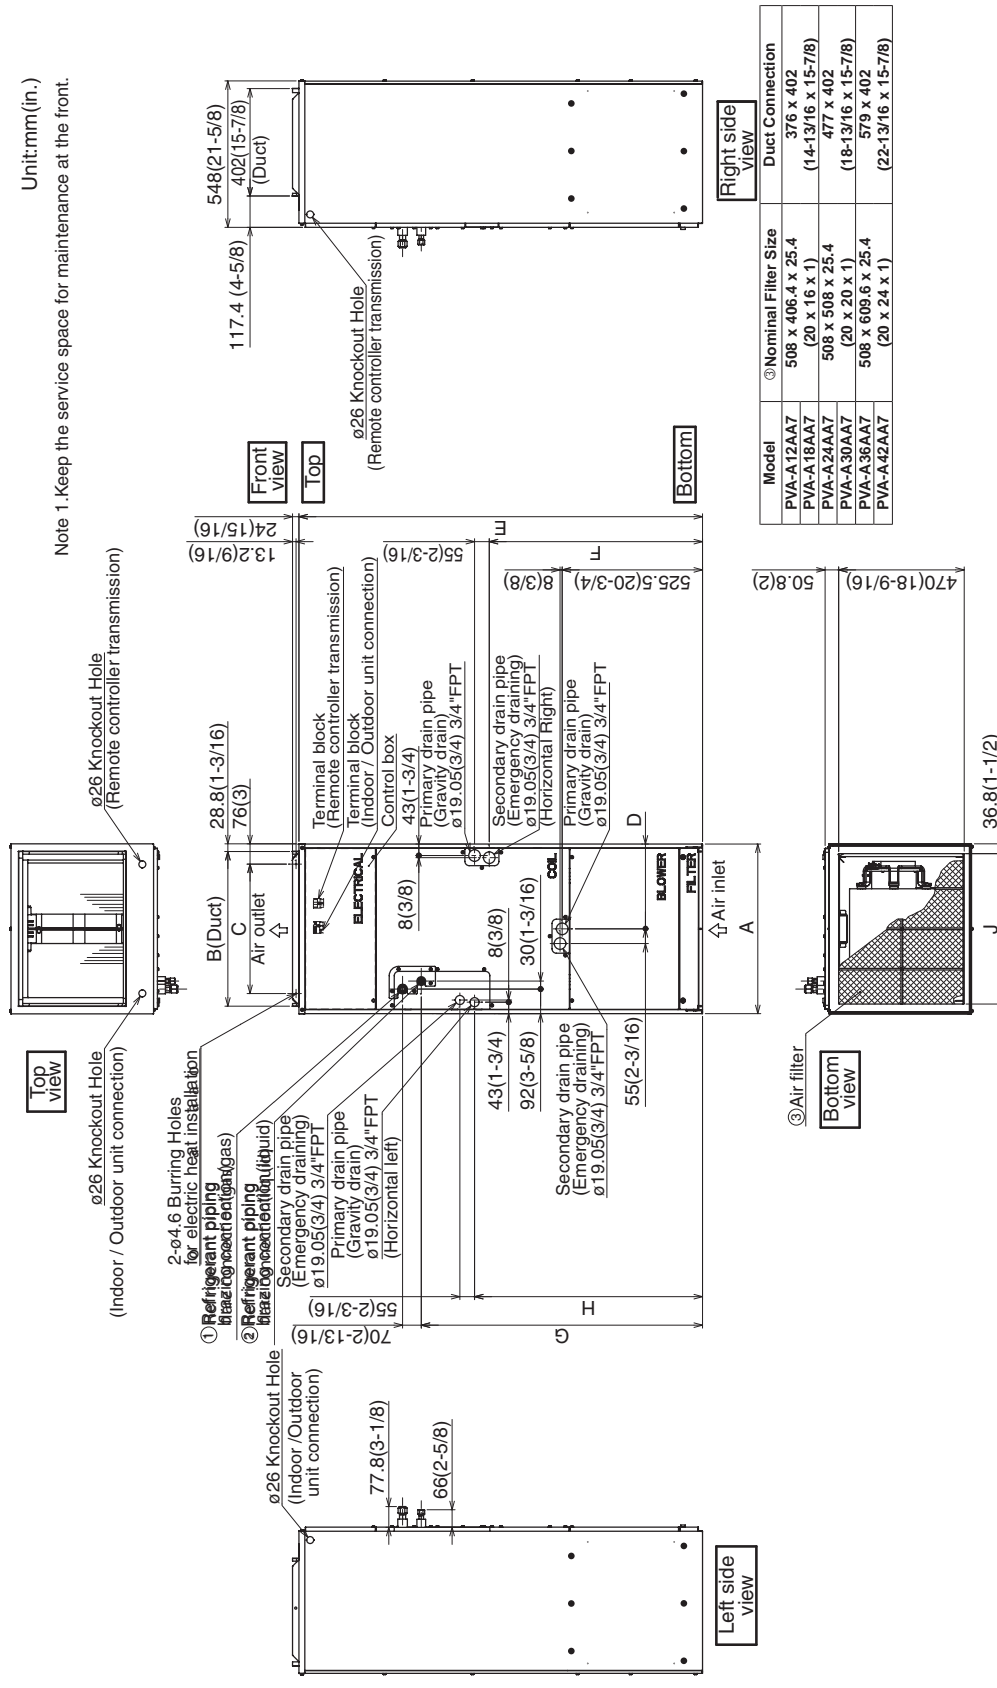


Model	③ Nominal Filter Size	Duct Connection
PVA-A12AA7	508 x 406.4 x 25.4 (20 x 16 x 1)	376 x 402 (14-13/16 x 15-7/8)
PVA-A18AA7	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)
PVA-A24AA7	508 x 609.6 x 25.4 (20 x 24 x 1)	579 x 402 (22-13/16 x 15-7/8)

Model	Unit: mm (in.)										
	A	B	C	D	E	F	G	H	J	① Gas Pipe	② Liquid Pipe
PVA-A12AA7	432 (17)	376 (14-13/16)	281 (11-1/8)	224 (8-7/8)	1275 (50-1/4)	680 (26-13/16)	823 (32-7/16)	735.5 (29)	360 (14-3/16)	ø 12.7 (1/2)	ø 6.35 (1/4)
PVA-A18AA7	534 (21)	477 (18-13/16)	382.6 (15-1/8)	266.5 (10-1/2)	1378 (54-1/4)	737 (29-1/16)	953.5 (37-9/16)	792 (31-3/16)	461 (18-3/16)	ø 15.88 (5/8)	ø 9.52 (3/8)
PVA-A24AA7	635 (25)	579 (22-13/16)	484.6 (19-1/8)	317.5 (12-1/2)	1511 (59-1/2)	798.5 (31-7/16)	1053 (41-1/2)	853.5 (33-5/8)	563 (22-3/16)		

## Outdoor Unit Outline and Dimensions:

Unit: mm<in>

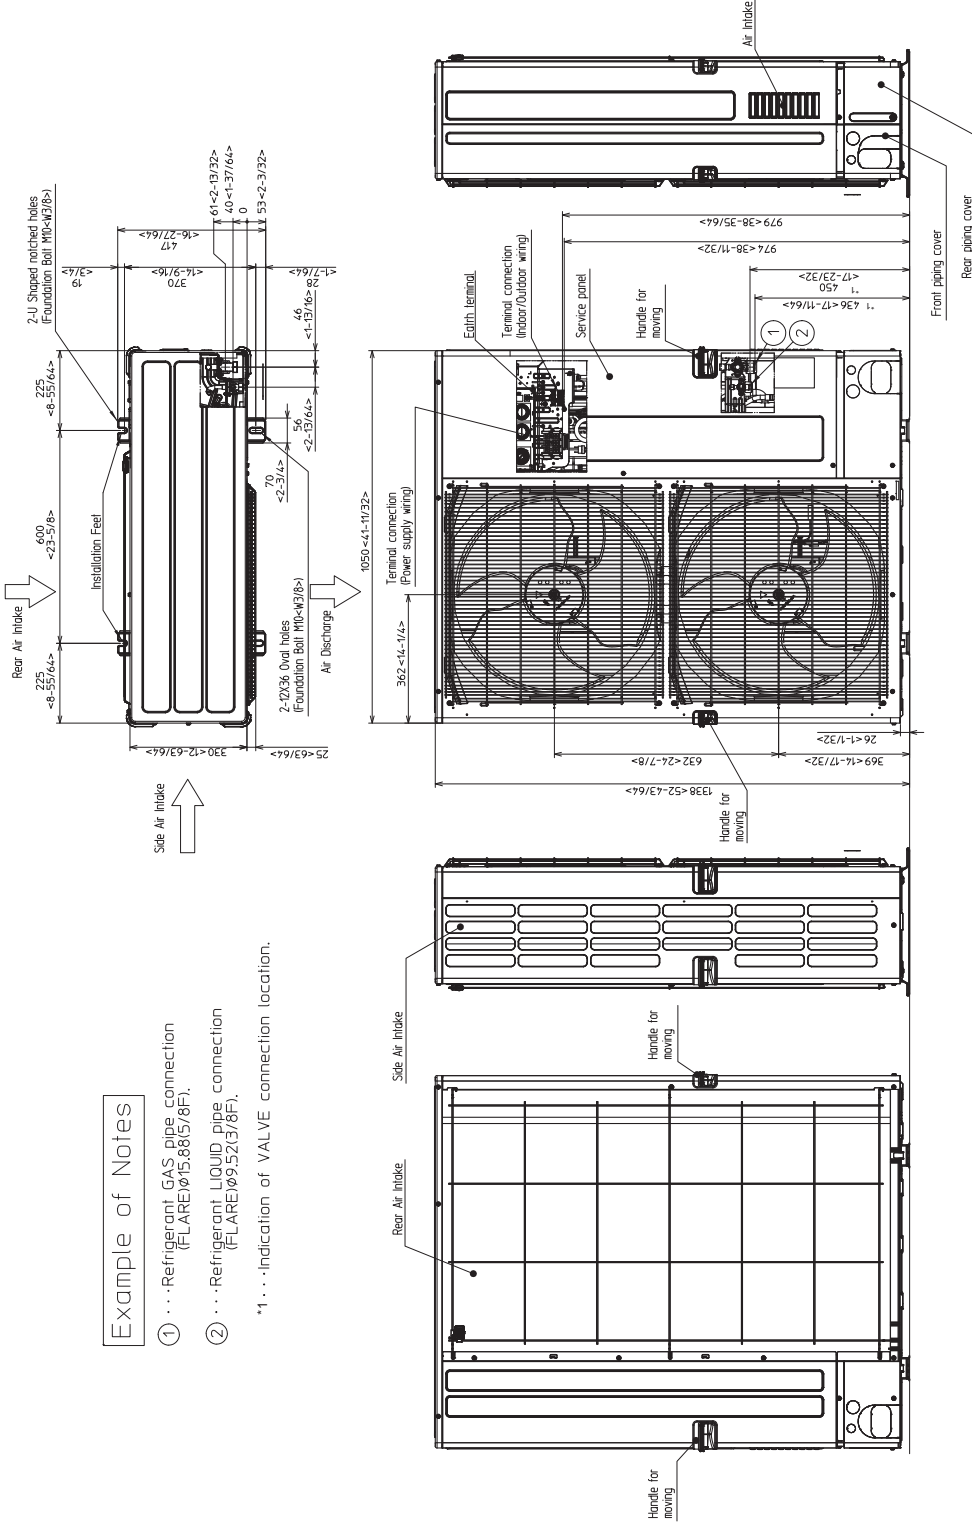

**Example of Notes**

- ① . . . Refrigerant GAS pipe connection (FLARE) (95.88(5/8)F).
  - ② . . . Refrigerant LIQUID pipe connection (FLARE) (95.52(3/8)F).
- \*1 . . . Indication of VALVE connection location.

