




- Quick and easy to install
- Fits any minisplit up to 60,000 BTU/hr
- For left or right hand installation
- 12 months limited warranty
- Fully potted for noise & water resistance
- Self levelling, self priming pump
- Automatically operates on water rise
- Easy access for service
- Cleanable stainless steel filter
- Quiet – Mini Lime only 23 dB(A)
Maxi Lime only 35 dB(A)
- 2 elbows to suit different lineset covers
- CAPACITY – Mini Lime: 3.7 GPH @ zero head, 0.8 GPH @26ft head
Maxi Lime: 5.8 GPH @ zero head, 0.8 GPH @49ft head

- Available in 115 & 230 V AC
- Volt free N/O & N/C contacts switch off unit and activate optional alarm
- Ivory color fits any decor
- Kit includes all components required



mini & maxi lime pump

PERFORMANCE GRAPHS

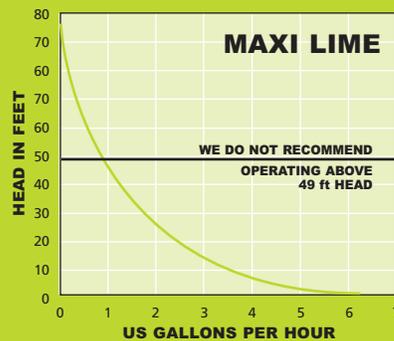

KIT INCLUDES

- Mini pump unit (3.5" x 4" x 1.7")
- Maxi pump unit (4.5" x 4" x 1.7")
- Pump/cable assembly
- Elbow
- 31" lineset cover
- Ceiling plate
- Evaporator flashing
- Inlet & outlet tubing
- Wallplugs & screws
- Installation manual

TECHNICAL DATA

| | MINI LIME | MAXI LIME |
|-----------------------------|---|---|
| Power supply & consumption: | 115V AC 0.16A 13.5W 60Hz or 230V AC 0.10A 15W 60Hz | 115V AC 0.23A 18W 60Hz or 230V AC 0.10A 15W 60Hz |
| Rating: | Continuously rated | Non-continuously rated - operating time: 10 mins on/ 5 mins off |
| Class: | Class I appliance | Class II appliance |
| Capacity: | 3.7 GPH @ zero head, 0.8 GPH @26ft head | 5.8 GPH @ zero head, 0.8 GPH @49ft head |
| Maximum head: | 26ft | 49ft |
| Sound level: | 23dB(A) | 35dB(A) |
| Minisplits up to: | 30,000 btu/hr | 60,000 btu/hr |

3A volt-free alarm wires, N/O N/C contacts rated @ 5A inductive at 115V or 230V AC

Hall effect electronic water level sensors

Thermally protected pump


ETL® listed

Discharge tube 1/4" i.d

Gravity inlet

Fully potted

INSTALLATION

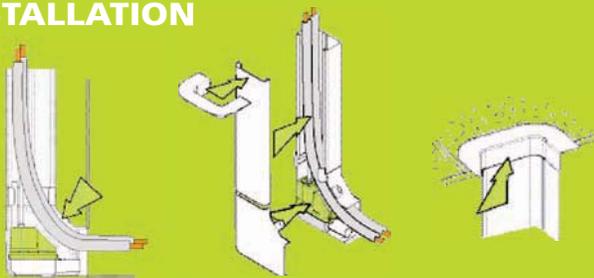

SYSTEM LOCATION

