

Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____ Date: _____
 Unit Designation: Schedule No. _____ Model No.: _____

CITYMULTI Indoor Unit

Submittal Data: PDFY-P20VM-A  **MITSUBISHI ELECTRIC**

Ducted (Medium Static Pressure)

Capacities

Cooling7900 BTU
 Heating8900 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB
 Indoor Design Cooling 27/19.5 DB/WB
 Indoor Design Heating 21 DB

Indoor Unit:

Power Supply208-230/1/60
 Max. Fuse Size.....15 Amps
 Min. Ampacity0.73 Amps
 Weight56.2 Lbs.
 SounddB(A) L-28/H-36
 External static pressure.....0.4 inches water
 Airflow..... 212 low - 300 high CFM.

Outdoor Unit:

Can be used with any of the following City Multi outdoor units.

- * S-Series
- * Y-Series
- * R2- Series
- * WR2 -Series


Refer to outdoor unit submittals.

Refrigerant Piping:


Liquid (OD)1/4 In.
 Gas (OD)1/2 In.

Standard Features:

- * One year parts warranty
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Zone control
- * Quiet operation - both, indoor and outdoor units
- * On/Off timer
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 25% to 100%
- * Network Control.

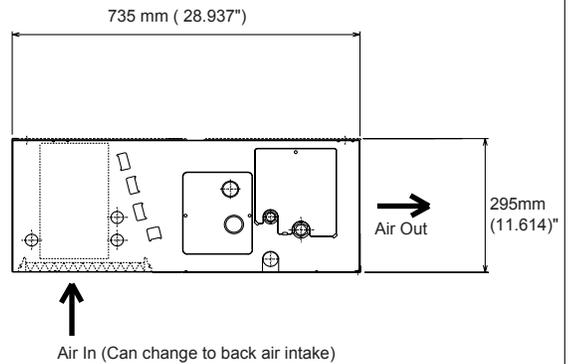

Side Veiw

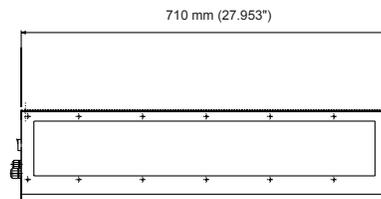

Front View

Notes: