

Job Name:	Location:			
Purchaser:				
Engineer:				
Submitted To:	For:	Reference	Approval	Construction
Submitted By:	Date:			
Unit Designation:	Schedule No.	Model No.:		

CITYMULTI Indoor Unit

Submittal Data: PDFY-P25VM-A



Ducted (Medium Static Pressure)

Capacities

Cooling9900 BTU
Heating11100 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB
Indoor Design Cooling 27/19.5 DB/WB
Indoor Design Heating 21 DB

Indoor Unit:

Power Supply208-230/1/60
Max. Fuse Size.....15 Amps
Min. Ampacity0.73 Amps
Weight56.2 Lbs.
SounddB(A) L-28/H-36
External static pressure.....0.4 inches water
Airflow..... 212 low - 300 high CFM.

Outdoor Unit:

Can be used with any of the following City Multi outdoor units.

- * S-Series
- * Y-Series
- * R2- Series
- * WR2 -Series




Refer to outdoor unit submittals.

Refrigerant Piping:

Liquid (OD)1/4 In.
Gas (OD)1/2 In.

Standard Features:

- * One year parts warranty
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Zone control
- * Quiet operation - both, indoor and outdoor units
- * On/Off timer
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 25% to 100%
- * Network Control.

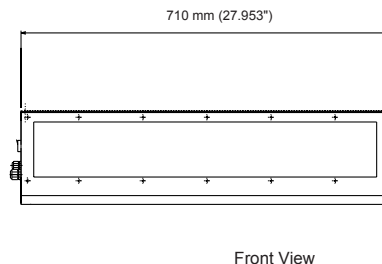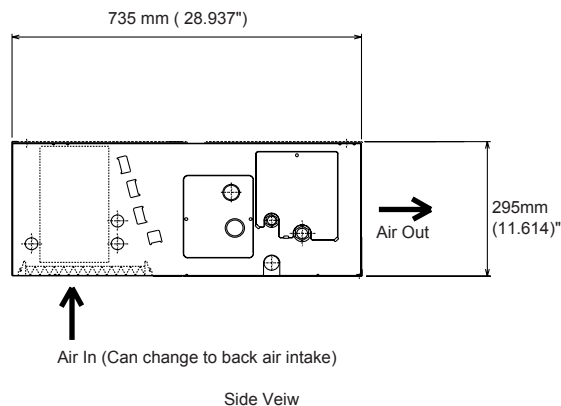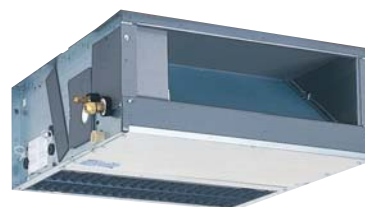

Notes: