

Job Name: _____		Location: _____	
Purchaser: _____			
Engineer: _____			
Submitted To: _____		For: Reference	Approval Construction
Submitted By: _____		Date: _____	
Unit Designation: Schedule No. _____		Model No.: _____	

CITYMULTI

Indoor Unit

Submittal Data: PDFY-P32VM-E



MITSUBISHI ELECTRIC

Ducted (Medium Static Pressure)

Capacities

Cooling 12,280 BTU/h

Heating 13,640 BTU/h

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB

Indoor Design Cooling 27°/19° DB/WB

Indoor Design Heating 20°DB

Indoor Unit:

Power Supply208-230/1/60

Max. Fuse Size.....15 Amps

Min. Ampacity0.73 Amps

Weight.....59.5 Lbs.

SounddB(A) L-28/H-36

External static pressure.....0.4 inches water

Airflow..... 212 low - 300 high CFM.

Outdoor Unit:

Can be used with any of the following City Multi outdoor units.

* S-Series

* Y-Series

* R2- Series

* WR2 -Series

Refer to outdoor unit submittals.



Refrigerant Piping: R22/R407C R410A

Liquid (OD)1/4 In. 1/4 In.


Gas (OD) 1/2 In. 1/2 In.

Standard Features:

- * One year parts warranty
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Zone control
- * Quiet operation - both, indoor and outdoor units
- * On/Off timer
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 25% to 100%
- * Network Control.

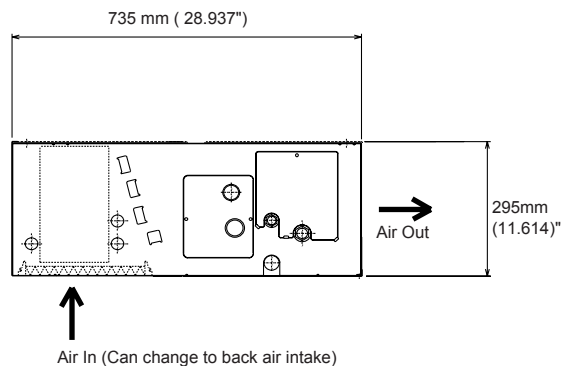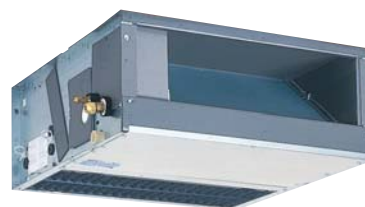

Side View

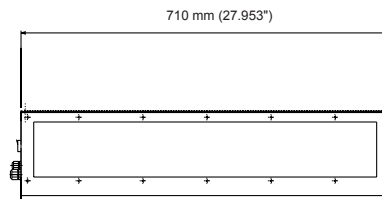

Front View

Notes: