

Job Name: _____ Location: _____
Purchaser: _____
Engineer: _____
Submitted To: _____ For: Reference Approval Construction
Submitted By: _____ Date: _____
Unit Designation: Schedule No. _____ Model No.: _____

CITY MULTI Indoor Unit

Submittal Data: PDFY-P40VM-A  **MITSUBISHI ELECTRIC**

Ducted (Medium Static Pressure)

Capacities

Cooling15900 BTU
Heating17900 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB
Indoor Design Cooling 27/19.5 DB/WB
Indoor Design Heating 21 DB

Indoor Unit:

Power Supply208-230/1/60
Max. Fuse Size.....15 Amps
Min. Ampacity0.89 Amps
Weight70.5 Lbs.
SounddB(A) L-34/H-39
External static pressure.....0.4 inches water
Airflow..... 353 low - 494 high CFM.

Outdoor Unit:

Can be used with any of the following City Multi outdoor units.

- * S-Series
- * Y-Series
- * R2- Series
- * WR2 -Series



Refer to outdoor unit submittals.

Refrigerant Piping:

Liquid (OD)1/4 In.
Gas (OD)1/2 In.

Standard Features:

- * One year parts warranty
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Zone control
- * Quiet operation - both, indoor and outdoor units
- * On/Off timer
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 25% to 100%
- * Network Control.

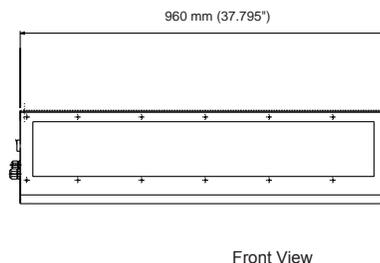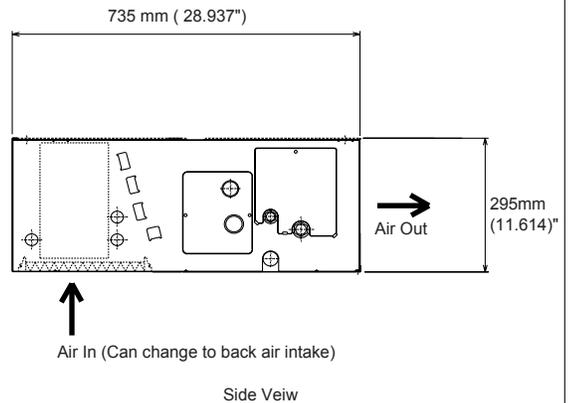

Notes: