

Job Name: _____		Location: _____	
Purchaser: _____			
Engineer: _____			
Submitted To: _____	For: Reference	Approval	Construction
Submitted By: _____	Date: _____		
Unit Designation: Schedule No. _____	Model No.: _____		

CITY MULTI Indoor Unit

Submittal Data: PDFY-P71VM-A



Ducted (Medium Static Pressure)

Capacities

Cooling28200 BTU
Heating31700 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB
Indoor Design Cooling 27/19.5 DB/WB
Indoor Design Heating 21 DB

Indoor Unit:

Power Supply208-230/1/60
Max. Fuse Size.....15 Amps
Min. Ampacity1.10 Amps
Weight86 Lbs.
SounddB(A) L-32/H-40
External static pressure.....0.4 inches water
Airflow..... 476 low - 688 high CFM.

Outdoor Unit:

Can be used with any of the following City Multi outdoor units.

- * S-Series
- * Y-Series
- * R2- Series
- * WR2 -Series



Refer to outdoor unit submittals.

Refrigerant Piping:


Liquid (OD)3/8 In.
Gas (OD)5/8 In.

Standard Features:

- * One year parts warranty
- * Auto restart following a power outage
- * Advanced Microprocessor controls
- * Zone control
- * Quiet operation - both, indoor and outdoor units
- * On/Off timer
- * Self Diagnostics
- * Linear electronic expansion valve
- * Capacity Control 25% to 100%
- * Network Control.

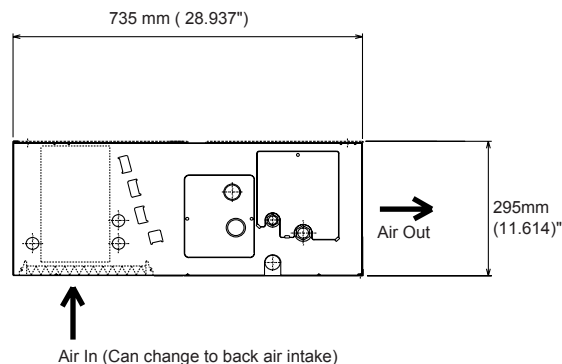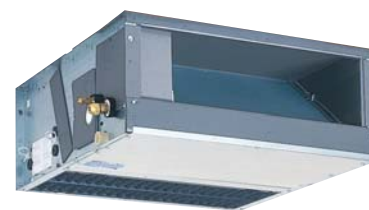

Side View

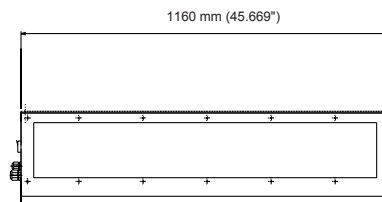

Front View

Notes: