

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For: ? Reference ? Approval ? Construction

Submitted By: \_\_\_\_\_ Date: \_\_\_\_\_

Unit Designation: Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

**CITYMULTI** Outdoor Unit

**Submittal Data: PQHY-P250TM-A-C**  **MITSUBISHI ELECTRIC**

WY-Series heat and cool  
Water cooled condenser

**Capacities**

Cooling .....99300 BTU

Heating .....111200 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB

Indoor Design Cooling 27/19.5 DB/WB

Indoor Design Heating 20 DB

**Outdoor Unit:**

Power Supply .....208-230/3/60

Max. Fuse Size.....50 Amps

Min. Ampacity .....42.188 Amps

Weight ..... 617 Lbs.

Sound ..... dB(A) 52

Water Flow.....4.93 Gph



**Refrigerant Piping:**

Liquid (OD) .....1/2" In.

Gas (OD) .....1 1/8" In.

**Standard Features:**

- \* One year parts warranty 6 year on compressor
- \* Auto restart following a power outage
- \* Advanced Microprocessor controls
- \* Variable Refrigerant Flow
- \* Quiet operation
- \* Self Diagnostics
- \* Linear electronic expansion valve
- \* Capacity Control 8% to 108%
- \* Network Control.
- \* Advanced oil return system
- \* Long pipe runs up to 100m
- \* Connectable indoor unit capacity 50 to 130%

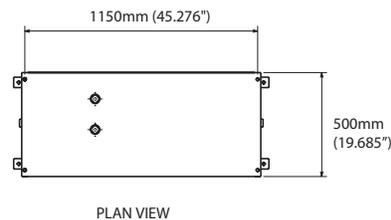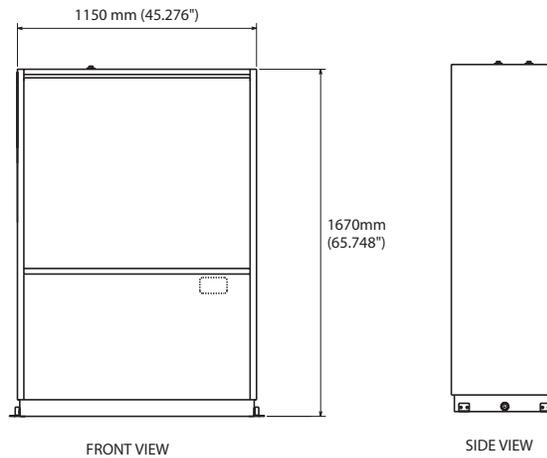

Notes: