

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For: Reference Approval Construction  
 Submitted By: \_\_\_\_\_ Date: \_\_\_\_\_  
 Unit Designation: Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

**CITYMULTI** Outdoor Unit

**Submittal Data: PU(H)Y-200TEM-A**  **MITSUBISHI ELECTRIC**

Y-Series heat pump

Capacities

Cooling .....76,500 BTU  
 Heating .....85,500 BTU

Outdoor Design Temp 35°C (cool) / 7°C (heat) DB  
 Indoor Design Cooling 27/ 19.5°DB/WB  
 Indoor Design Heating 20° DB

Outdoor Unit:


Power Supply .....208-230/3/60  
 Max. Fuse Size.....30 Amps  
 Min. Ampacity .....23.75 Amps  
 Weight.....471 Lbs.  
 Sound .....dB(A) 56

Refrigerant Piping:

Liquid (OD) .....1/2" In.  
 Gas (OD) .....1 1/8" In.

Standard Features:

- \* One year parts warranty 6 year on compressor
- \* Auto restart following a power outage
- \* Advanced Microprocessor controls
- \* Vairable Refrigerant Flow
- \* Quiet operation
- \* Self Diagnostics
- \* Linear electronic expansion valve
- \* Capacity Control 8% to 108%
- \* Network Control.
- \* Advanced oil return system
- \* Long pipe runs up to 100m

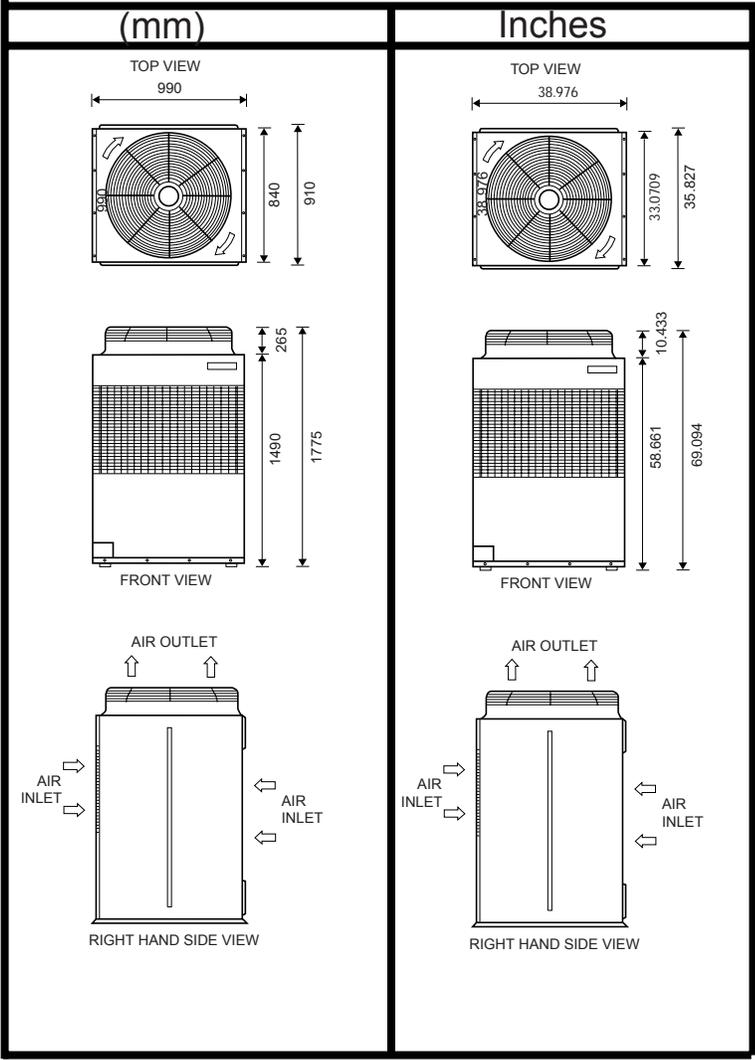

Notes: