

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_  
 Purchaser: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted To: \_\_\_\_\_ For: ? Reference ? Approval ? Construction  
 Submitted By: \_\_\_\_\_ Date: \_\_\_\_\_  
 Unit Designation Schedule No. \_\_\_\_\_ Model No: \_\_\_\_\_

**CITY MULTI** Outdoor Unit

**Submittal Data: PU(H)Y-315TEM-A**  **MITSUBISHI ELECTRIC**

Y-Series heat pump

Capacities

Cooling ..... 121,100 BTU  
 Heating ..... 133,400 BTU

Outdoor Design Temp 35°C(cool)/ 7°C(heat)DB  
 Indoor Design Cooling 27/19.5DB/MB  
 Indoor Design Heating 2 0 DB

Outdoor Unit:


Power Supply ..... 208-230/3/60  
 Max. Fuse Size ..... 60 Amps  
 Min. Ampacity ..... 45.38 Amps  
 Weight ..... 504 Lbs  
 Sound ..... dB(A) 60

Refrigerant Piping:

Liquid (OD) ..... 1/2" In  
 Gas (OD) ..... 1 3/8" In.

Standard Features:

- \* One year parts warranty 6 year on compressor
- \* Auto restart following a power outage
- \* Advanced Microprocessor controls
- \* Variable Refrigerant Flow
- \* Quiet operation
- \* Self Diagnostics
- \* Linear electronic expansion valve
- \* Capacity Control 8% to 108%
- \* Network Control.
- \* Advanced oil return system
- \* Long pipe runs up to 100m
- \* Connect up to 16 Indoor units

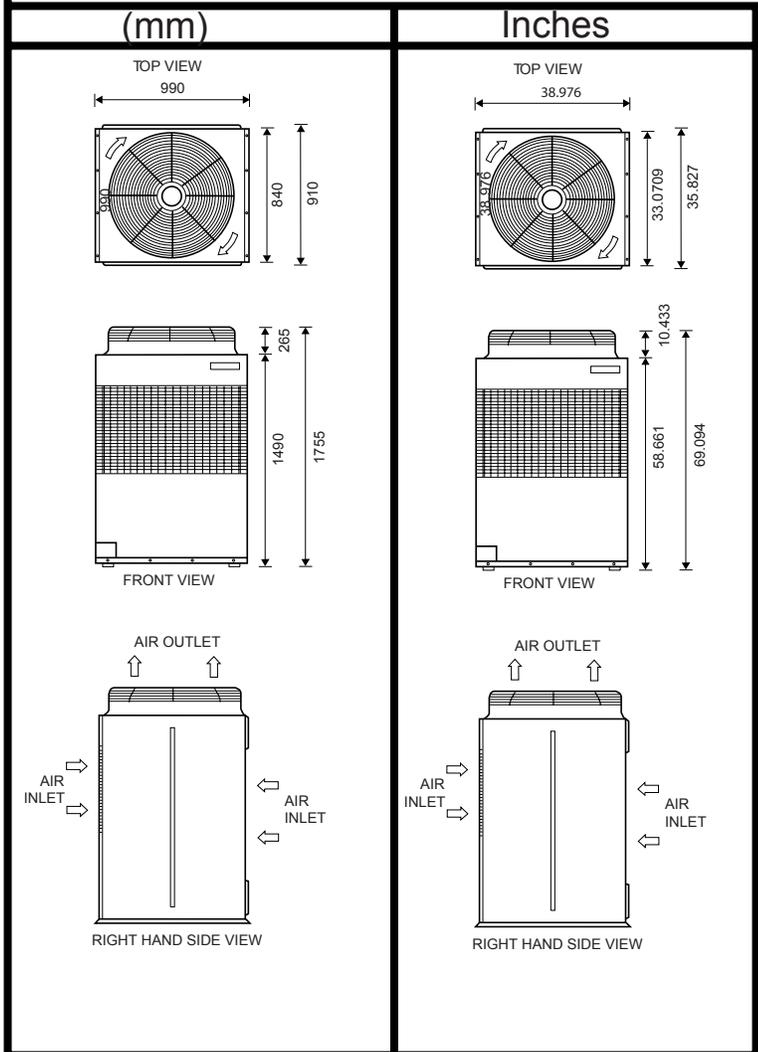

Notes