




Job Name:

Schedule Reference:

Date:



Notes:

- \*1 - LAHK-1 reference separate submittal
- \*2 - LAHK-2 reference separate submittal
- (\*1\*2 required depending on application)

### GENERAL FEATURES

- Protects outdoor coil from wind for systems doing year round cooling and low ambient cooling operations only.
- 20-gauge satin coat steel, powder coated beige matching unit.

### NOTES:

- Outdoor unit must be mounted at least 18" off the ground or 12" above the highest average snow fall, whichever is greater.
- Clearances for the sides and back of the outdoor unit must be at least 8" more than standard installation guidelines.
- For best coil protection, two and three module units must be mounted with a minimum of 1-3/16" space between each.
- Must be used with LAHK-1 (LAHK-2 if required)

### SPECIFICATIONS

Model Number	Description	Ship Weight	Carton Dimensions
CM-WD-SD-TKMU	Side Wind Deflectors (2 per box)	20.4kg (45 lbs.)	21"W x 3.5"H x 52"L
CM-WD-RE-TKMU	Rear Wind Deflectors (1 per box)	20.4kg (45 lbs.)	26"W x 2.5"H x 52"L

### COMPONENTS REQUIRED PER OUTDOOR UNIT

For models with two or three units, selections are based on a space of 1-3/16" between the modules. For additional space between the modules, additional components may be required.

#### PUHY-P-T/Y(S)KMU-A SERIES


Unit model	Model Sizes	Component Qty	
	S / L / X	CM-WD-SD-TKMU	CM-WD-RE-TKMU
PUHY-P72(T,Y)KMU-A	s	1	1
PUHY-P96(T,Y)KMU-A	L	1	1
PUHY-P120(T,Y)KMU-A	XL	1	2
PUHY-P144(T,Y)KMU-A	XL	1	2
PUHY-P144YSKMU-A	S+S	1	2
PUHY-P168(T,Y)SKMU-A	S+L	1	2
PUHY-P192(T,Y)SKMU-A	S+XL	1	3
PUHY-P216(T,Y)SKMU-A	L+XL	1	3
PUHY-P240(T,Y)SKMU-A	XL+XL	1	4
PUHY-P264(T,Y)SKMU-A	S+S+XL	1	4
PUHY-P288(T,Y)SKMU-A	S+L+XL	1	4
PUHY-P312(T,Y)SKMU-A	S+XL+XL	1	5
PUHY-P336(T,Y)SKMU-A	L+XL+XL	1	5
PUHY-P360(T,Y)SKMU-A	XL+XL+XL	1	6

#### PURY-P-T/Y(S)KMU-A SERIES

Unit model	Model Sizes	Component Qty	
	S / L / X	CM-WD-SD-TKMU	CM-WD-RE-TKMU
PURY-P72(T,Y)KMU-A	L	1	1
PURY-P96(T,Y)KMU-A	L	1	1
PURY-P120(T,Y)KMU-A	XL	1	2
PURY-P144(T,Y)KMU-A	XL	1	2
PURY-P144YSKMU-A	L+L	1	2
PURY-P168(T,Y)SKMU-A	L+L	1	2
PURY-P192(T,Y)SKMU-A	L+L	1	2
PURY-P216(T,Y)SKMU-A	L+XL	1	3
PURY-P240(T,Y)SKMU-A	XL+XL	1	4
PURY-P264(T,Y)SKMU-A	XL+XL	1	4
PURY-P288(T,Y)SKMU-A	XL+XL	1	4

# CM-WD-SD-TKMU and CM-WD-RE-TKMU – DIMENSIONS

CM-WD-SD-TKMU

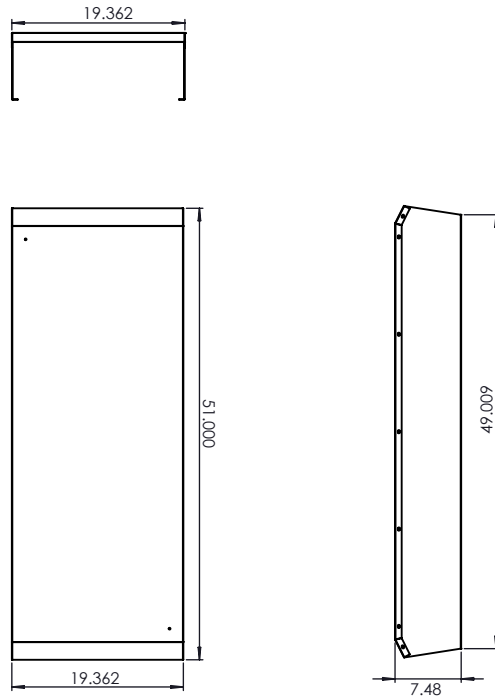

CM-WD-RE-TKMU  
(Universal fitting S, L, XL)

