

SUBMITTAL DATA: MXZ-2C20NAHZ2-U1
MULTI-INDOOR INVERTER HEAT-PUMP SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
System Designation:	Schedule No.:	

GENERAL FEATURES

- Highly energy-efficient system that features 100% heating capacity at 5°F (-15°C) with guaranteed capacity down to -13°F (-25°C)
- Quiet operation
- Built-in base pan heater to prevent ice in drain pan

ACCESSORIES

- 3/8" x 1/2" Port Adapter (MAC-A454JP; for use with 15,000 Btu/h Indoor units)
- M-NET Adapter (PAC-IF01MNT-E)
- Windscreens (*1)



Outdoor Unit: MXZ-2C20NAHZ2

Specifications			Model Name
Unit Type			MXZ-2C20NAHZ2-U1
Cooling* Non-ducted / Ducted (*2)	Rated Capacity	Btu/h	18,000 / 20,000
	Capacity Range	Btu/h	6,000 - 20,000
	Rated Total Input	W	1,334 / 1,819
Heating at 47°F* (8.3°C*) Non-ducted / Ducted (*2)	Rated Capacity	Btu/h	22,000 / 22,000
	Capacity Range	Btu/h	7,400 - 25,500
	Rated Total Input	W	1,612 / 1,748
Heating at 17°F* (-8.3°C*) Non-ducted / Ducted (*2)	Rated Capacity	Btu/h	13,700 / 13,700
	Maximum Capacity	Btu/h	22,000 / 22,000
	Rated Total Input	W	1,450 / 1,588
Heating at 5°F* (-15°C*) (*2)	Maximum Capacity	Btu/h	22,000
Electrical Requirements	Power Supply	Voltage, Phase, Hertz	208 / 230V, 1-Phase, 60 Hz
	Recommended Fuse/Breaker Size	A	40
	MCA	A	29
Voltage	Indoor - Outdoor S1-S2	V	AC 208 / 230
	Indoor - Outdoor S2-S3	V	+12VDC to +24VDC
Compressor			DC INVERTER-driven Twin Rotary
Fan Motor (ECM)		F.L.A.	1.9
Sound Pressure Level	Cooling	dB(A)	54
	Heating		58
External Dimensions (H x W x D)		In / mm	41-9/32 x 37-13/32 x 13 1048 x 950 x 330
Net Weight		Lbs / kg	187 / 85
External Finish			Munsell No. 3Y 7.8/11
Refrigerant Pipe Size O.D. — Two Ports	Liquid	In / mm	1/4 / 6.35
	Gas		A,B: 3/8 / 9.52
Max. Refrigerant Line Length (A+B)		Ft / m	164 / 50
Max. Piping Length for Each Indoor Unit		Ft / m	82 / 25
Max. Refrigerant Pipe Height Difference	If IDU is Above ODU	Ft / m	49 / 15
	If IDU is Below ODU		49 / 15
Connection Method Indoor / Outdoor			Flared/Flared
Refrigerant			R410A

*-Rating Conditions per AHRI Standard:

Cooling | Indoor: 80°F (27°C) DB / 67°F (19°C) WB

Cooling | Outdoor: 95°F (35°C) DB / W.B. 23.9°C (75°F)

Heating at 47°F | Indoor: 70°F (21°C) DB / 60°F (16°C) WB

Heating at 47°F | Outdoor: 47°F (8°C) DB / 43°F (6°C) WB

Heating at 17°F | Indoor: 70°F (21°C) DB

Heating at 17°F | Outdoor: 17°F (-8°C) DB / 15°F (-9°C) WB

*1 Required in windy locations or very low temperatures.

*2 Non-ducted (09+09) / Ducted (09+12) combinations.

Specifications are subject to change without notice.



SPECIFICATIONS: MXZ-2C20NAHZ2-U1 , contd.

Operating Range:

Outdoor	
Cooling	D.B. 23 to 115° F [D.B. -5 to 46° C]*1
Heating	D.B. -13 to 70° F [D.B. -25 to 21° C]

*1. D.B. 5 to 115° F [D.B. -15 to 46° C], when an optional Air Outlet Guide is installed.

Energy Efficiencies:

Indoor Unit Type	SEER	EER	HSPF (IV)	COP @ 47°F	COP @ 17°F
Non-ducted (*2)	17.0	13.5	9.8	4.00	NA
Ducted and Non-ducted	NA	NA	NA	NA	NA
Ducted (*2)	15.0	11.0	9.5	3.69	NA

Multi-zone Indoor/Outdoor Combination Table

- **MXZ Compatibility Chart** – available on **MESCA Tech Info Centre M-Series** submittal page

* Refer to indoor unit submittal.

Notes:

- Minimum of two Indoor Units must be connected to the MXZ-2C20NAHZ2.
- Minimum installed capacity cannot be less than 12,000 Btu/h.
- System can operate with only one Indoor Unit turned on.
- May connect to any style indoor unit or combination.
- Information provided at 208/230V.

Refer to the MXZ-C Technical & Service Manual for detailed specifications and additional information per Indoor Unit Combination.


MVZ CONNECTION RULES:

- Only 1 MVZ may be used on any system.
- When an MVZ is connected, total connected capacity must be less than 100%.
- When an MVZ is connected, no P-Series indoor units can be used (PCA, PLA, or PEAD).

Indoor - Outdoor Connection:


- Connecting order
- Connect the terminal block in following order.

MXZ-2C	A → B → P
MXZ-3C	A → B → C → P

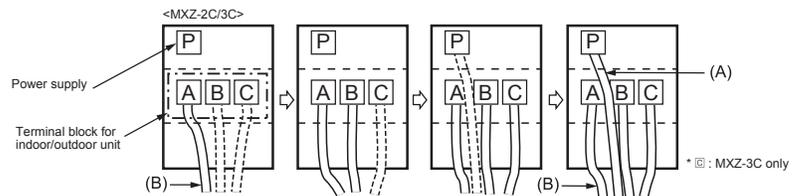

Remark:

- * A disconnect switch should be required. Check the local code.
- ** Use a ring tongue terminal in order to connect a ground wire to terminal.

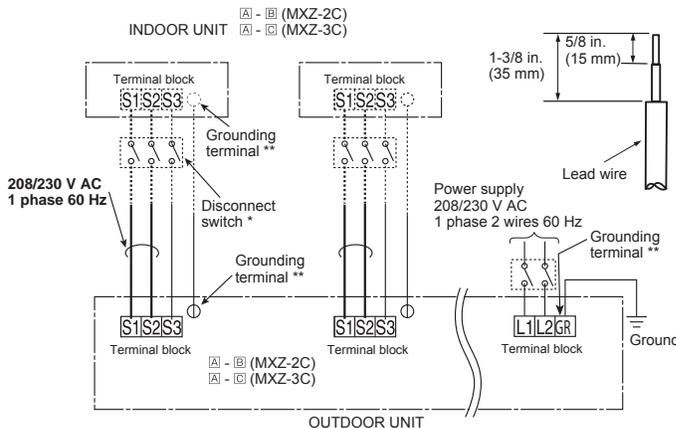

- Connect wires to the matching numbers of terminals.
- Be sure to attach each screw to its correspondent terminal when securing the cord and/or the wire to the terminal block.

CONNECTING WIRES AND CONNECTING GROUND WIRE

- Use solid conductor Min. AWG14 or stranded conductor Min. AWG14.
- Use double insulated copper wire with 600 V insulation.
- Use copper conductors only.
- Follow local electrical code.

POWER SUPPLY CABLE

- Use solid or stranded conductor Min. AWG8.
- Use copper conductors only.
- Follow local electrical code.

GROUND WIRE

- Use solid or stranded conductor Min. AWG8.
- Use copper conductors only.
- Follow local electrical code.

WARNING:

- Use the indoor/outdoor unit connecting wire that meets the Standards to connect the indoor and outdoor units and fix the wire to the terminal block securely so that no external force is conveyed to the connecting section of the terminal block. An incomplete connection or fixing of the wire could result in a fire.

For future servicing, give extra length to the connecting wires.

- Turn on the main power when the ambient temperature is -4°F (-20°C) or higher.
- Under conditions of -4°F (-20°C), it needs at least 4hr stand by before the units operate in order to warm the electrical parts.

Notes:

