

SUBMITTAL DATA: PCA-A36KA7 & PUY-A36NKA7

36,000 BTU/H CEILING-SUSPENDED AIR-CONDITIONING SYSTEM

Job Name:	Engineer:
Purchaser:	Application: ☐ Std. Cooling ☐ Ultra Low Ambient Cooling
Submitted To:	For: ☐ Reference ☐ Approval ☐ Construction
Submitted By:	Location:
System Designation:	Schedule No.:



UNIT OPTION:

Standard Model.....PUY-A36NKA7
 Seacoast (BS) Model.....PUY-A36NKA7-BS

ACCESSORIES:

i-See Sensor (PAC-SH91MK-E)
 Remote Controller Kit with i-See Sensor (PAR-SA92MW-E)
 Drain Pump (PAC-SH84DM-E)

Controls

Wireless Controller (MHK1)
 Advanced Wired Controller (PAR-32MAA / PAR-33MAA)
 Simple Wired Controller (PAC-YT53CRAU)
 Thermostat Interface (PAR-US444CN)
 M-NET Adapter (PAC-SJ95MA-E)

Outdoor Unit

Rear Snow Guard (SG-1-RE)
 Side Snow Guard (SG-1-SD)
 Front Wind Deflector (x2 required) (CM-S-FR-NKMU)
 Front Wind Blocker (x2 per box) (CM-S-BLK-NKMU)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	36,000 / 3,270

* Rating Conditions per AHRI Standard:
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
 Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB

Capacity Range		
Cooling	Btu/h / W	16,000 - 36,000

Operating Range		
Cooling		-40F** (-40.0°C) to 115°F (46°C) DB

** Windscreens required for cooling operation below 23°F (-5°C)

AHRI Efficiency Ratings	
EER	11.0
SEER	19.1

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA) *		Breaker Size	MOCP (Outdoor)
Indoor 2 AMP	Outdoor 25 AMP	30 AMP	31 AMP

*** All electrical work shall comply with National (CEC) and local codes and regulations.**

Indoor Unit		
Fan Motor (ECM)	F.L.A.	0.97
Fan Motor Output	W	160
SHF / Moisture Removal		0.73 / 8.7 pt./h
Field Drainpipe Size O.D.	In.(mm)	1-1/32 (26)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.5+0.5
Fan Motor Power	W	74

Airflow Rate (Low-M1-M2-Hi)			
Indoor (Cooling)	DRY	CFM	775-850-920-990
	WET		705-775-850-920
Outdoor	DRY		3,880

Sound Pressure Level			
Indoor (Low-M1-M2-Hi)		dB(A)	37-39-41-43
Outdoor	Cooling		52

External Dimensions		
Indoor (H x W x D)	In.(mm)	9-1/16 x 63 x 26-3/4 (230 x 1,600 x 680)
Outdoor (H x W x D)		52-11/16 x 41-5/16 x 13 + 1-3/16 (1,338 x 1050 x 330 + 30)

Net Weight		
Indoor	Lbs.(kg)	79 (36)
Outdoor		211 (96)


External Finish	
Indoor	White Munsel No. 6.4Y 8.9/0.4
Outdoor	Ivory Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A ; 10lbs., 6oz. (4.7kg)
-------------	------------------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)
Maximum Total Refrigerant Pipe Length	Ft. (m)	225 (69)
Maximum Vertical Separation	Ft. (m)	100 (30)

Specifications are subject to change without notice.




Unit: in. (mm)



Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

DIMENSIONS: PUY-A36NKA7

Unit: mm (in.)

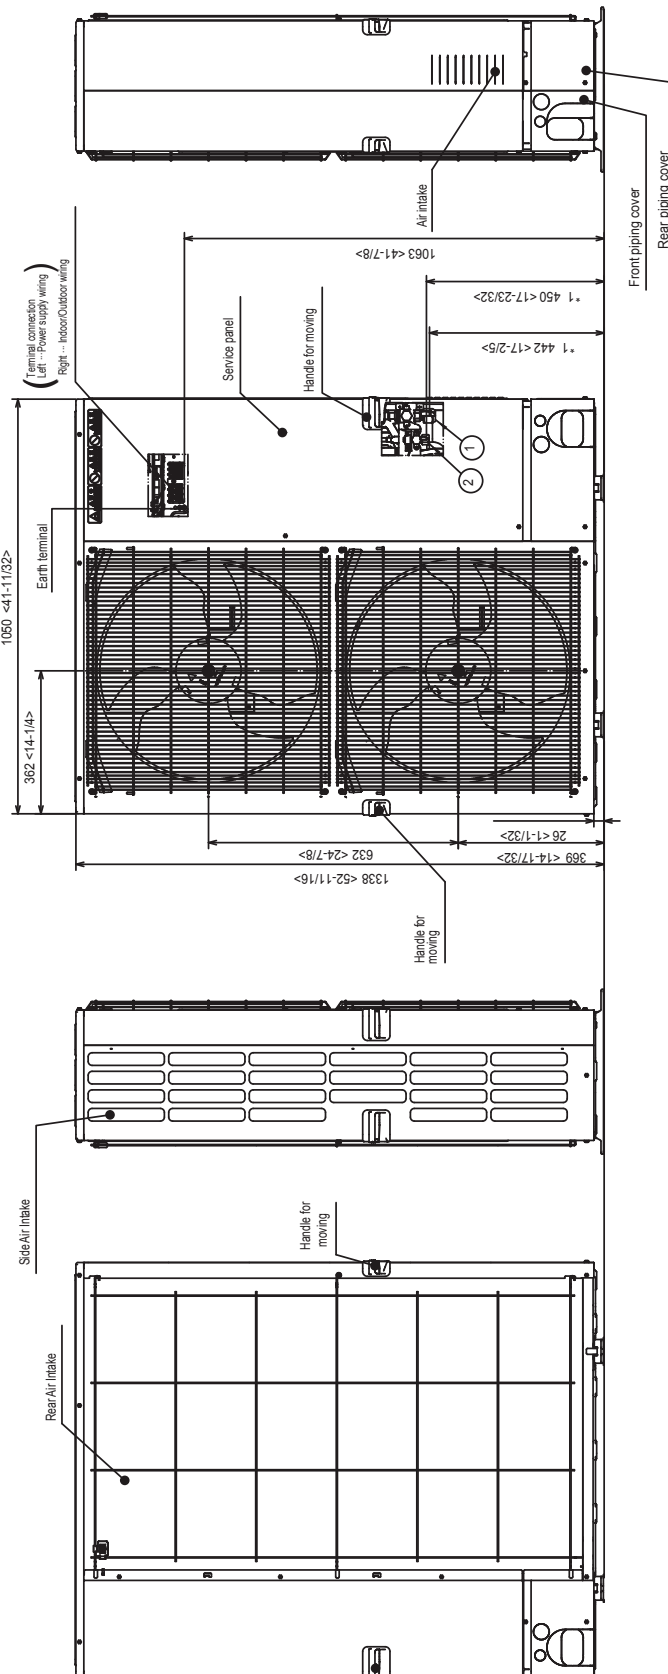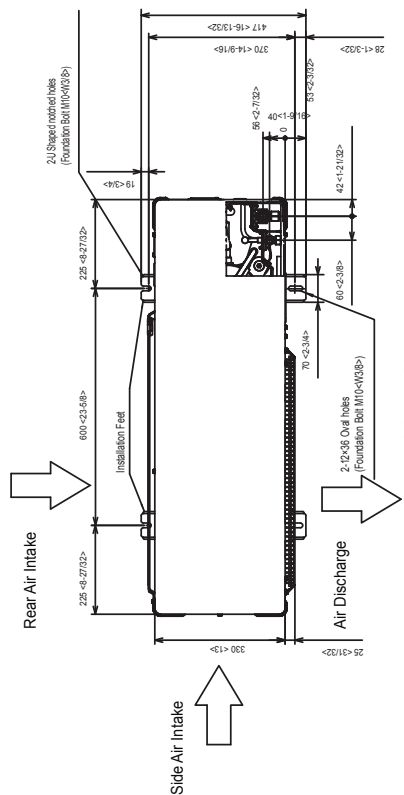


Indoor-Outdoor S1-S2*		208/230Vac
Indoor-Outdoor S2-S3*		24Vdc
Indoor remote controller		12Vdc

* Max. wire length 165ft. (50.3m)

Example of Notes

- 1 ... Refrigerant GAS pipe connection (FLARE) ø15.88(5.8F)
 2 ... Refrigerant LIQUID pipe connection (FLARE) ø9.52(3.8F)
 * 1 ... Indication of STOP VALVE connection location.

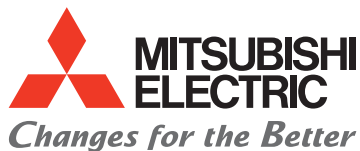

for a greener tomorrow



Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.