

SUBMITTAL DATA: PCA-A42KA7 & PUY-A42NKA7

42,000 BTU/H CEILING-SUSPENDED AIR-CONDITIONING SYSTEM

Job Name:	Engineer:
Purchaser:	Application: ☐ Std. Cooling ☐ Ultra Low Ambient Cooling
Submitted To:	For: ☐ Reference ☐ Approval ☐ Construction
Submitted By:	Location:
System Designation:	Schedule No.:



Indoor Unit: PCA-A42KA7



Outdoor Unit: PUY-A42NKA7 (-BS)

UNIT OPTION:

Standard Model.....PUY-A42NKA7
 Seacoast (BS) Model.....PUY-A42NKA7-BS

ACCESSORIES:

i-See Sensor (PAC-SH91MK-E)
 Remote Controller Kit with i-See Sensor (PAR-SA92MW-E)
 Drain Pump (PAC-SH84DM-E)

Controls

Wireless Controller (MHK1)
 Advanced Wired Controller (PAR-32MAA / PAR-33MAA)
 Simple Wired Controller (PAC-YT53CRAU)
 Thermostat Interface (PAR-US444CN)
 M-NET Adapter (PAC-SJ95MA-E)

Outdoor Unit

Rear Snow Guard (SG-1-RE)
 Side Snow Guard (SG-1-SD)
 Front Wind Deflector (x2 required) (CM-S-FR-NKMU)
 Front Wind Blocker (x2 per box) (CM-S-BLK-NKMU)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	42,000 / 4,110

* Rating Conditions per AHRI Standard:
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
 Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB

Capacity Range		
Cooling	Btu/h / W	16,000 - 42,000

Operating Range		
Cooling		-40F** (-40.0°C) to 115°F (46°C) DB

** Windscreens required for cooling operation below 23°F (-5°C)

AHRI Efficiency Ratings	
EER	10.2
SEER	17.6

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA) *		Breaker Size	MOCP (Outdoor)
Indoor 2 AMP	Outdoor 25 AMP	30 AMP	31 AMP

*** All electrical work shall comply with National (CEC) and local codes and regulations.**

Indoor Unit		
Fan Motor (ECM)	F.L.A.	0.97
Fan Motor Output	W	160
SHF / Moisture Removal		0.69 / 11.7 pt./h
Field Drainpipe Size O.D.	In.(mm)	1-1/32 (26)

Outdoor Unit		
Compressor		DC INVERTER-driven Twin Rotary
Fan Motor (ECM)	F.L.A.	0.5+0.5
Fan Motor Power	W	74

Airflow Rate (Low-M1-M2-Hi)			
Indoor (Cooling)	DRY	CFM	810-885-955-1,025
	WET		740-810-885-955
Outdoor	DRY		3,880

Sound Pressure Level			
Indoor (Low-M1-M2-Hi)		dB(A)	39-41-43-45
Outdoor	Cooling		52

External Dimensions		
Indoor (H x W x D)	In.(mm)	9-1/16 x 63 x 26-3/4 (230 x 1,600 x 680)
Outdoor (H x W x D)		52-11/16 x 41-5/16 x 13 + 1-3/16 (1,338 x 1050 x 330 + 30)

Net Weight		
Indoor	Lbs.(kg)	86 (39)
Outdoor		211 (96)


External Finish	
Indoor	White Munsel No. 6.4Y 8.9/0.4
Outdoor	Ivory Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A ; 10lbs., 6oz. (4.7kg)
-------------	------------------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)
Maximum Total Refrigerant Pipe Length	Ft. (m)	225 (69)
Maximum Vertical Separation	Ft. (m)	100 (30)

Specifications are subject to change without notice.




Unit: in. (mm)



Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

DIMENSIONS: PUY-A42NKA7


Unit: mm (in.)

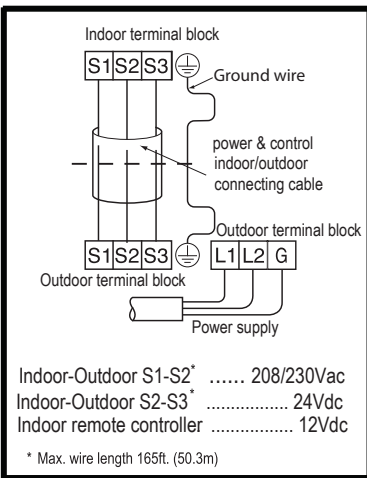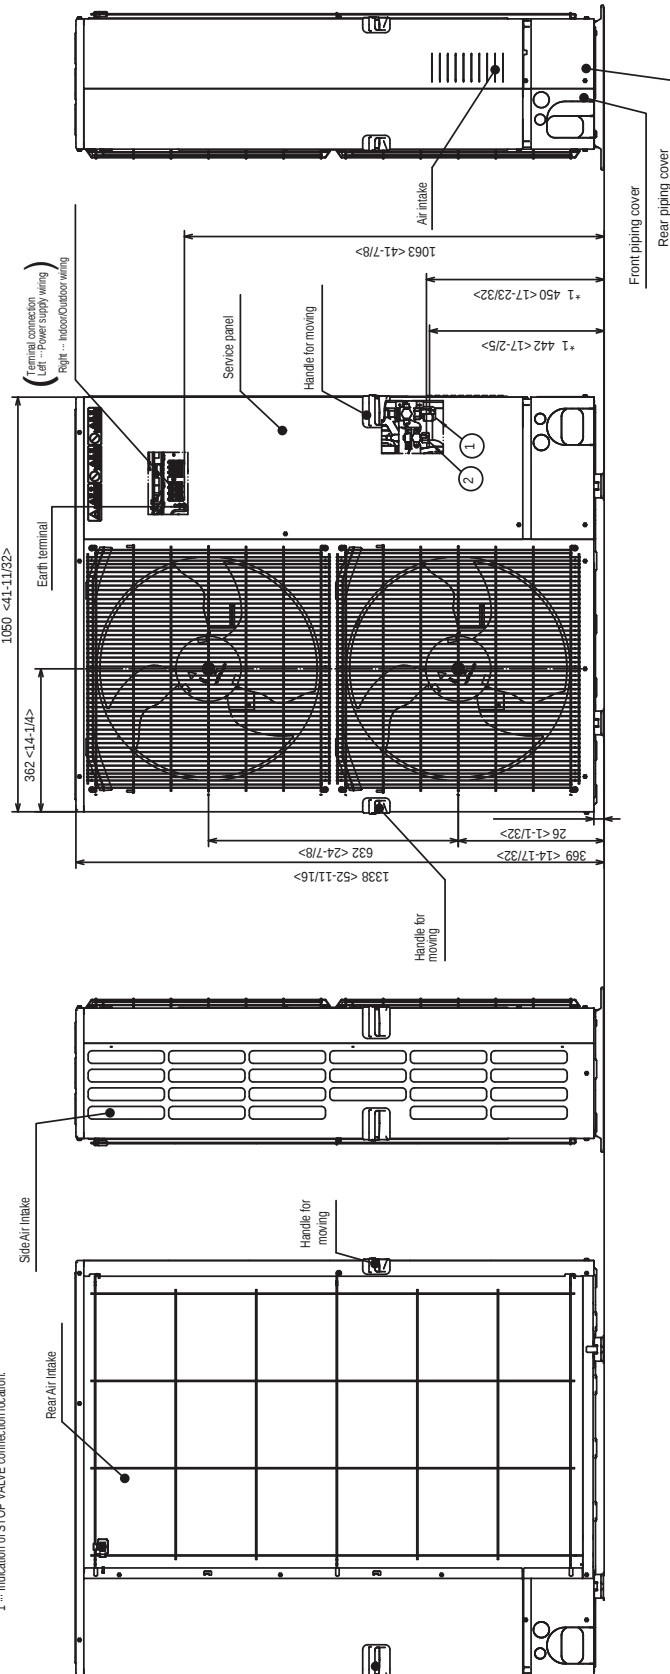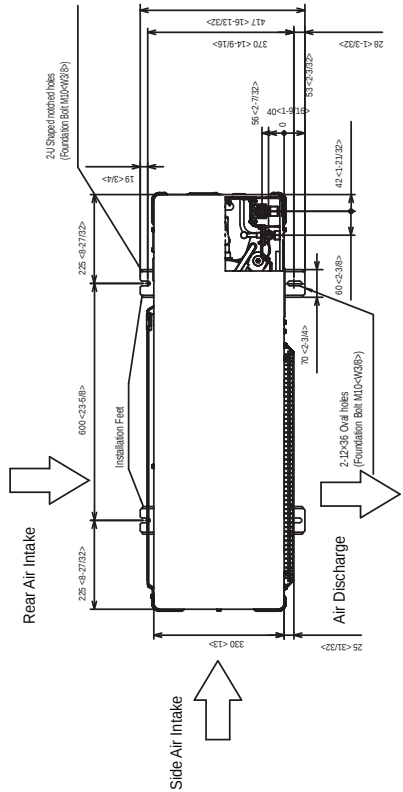

Example of Notes

- ① Refrigerant GAS pipe connection (FLARE) ø15.8(5/8F)
- ② Refrigerant LIQUID pipe connection (FLARE) ø9.52(3/8F)
- *1 ... Indication of STOP VALVE connection location.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

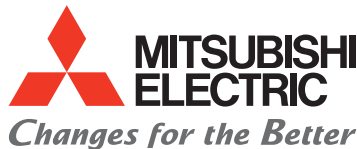

for a greener tomorrow

