




**Indoor Unit Outline and Dimensions:**

- Note 1. Use an M10 screw for the suspension bolt (field supply).  
 2. Keep the service space for maintenance at the bottom.  
 3. This drawing is for PEFY-P24-27-30NMAU-E4 models, which have 2 fans. PEFY-P06-08-12NMAU-E4 models have 1 fan. PEFY-P15-18NMAU-E4 models have 2 fans. PEFY-P36-48-54NMAU-E4 models have 3 fans.  
 4. If the inlet duct is used, remove the air filter (supplied with the unit), then install the filter (field supply) at the suction side.  
 5. Heat air to 0°C (32°F) or higher when taking fresh air with a fresh air intake.





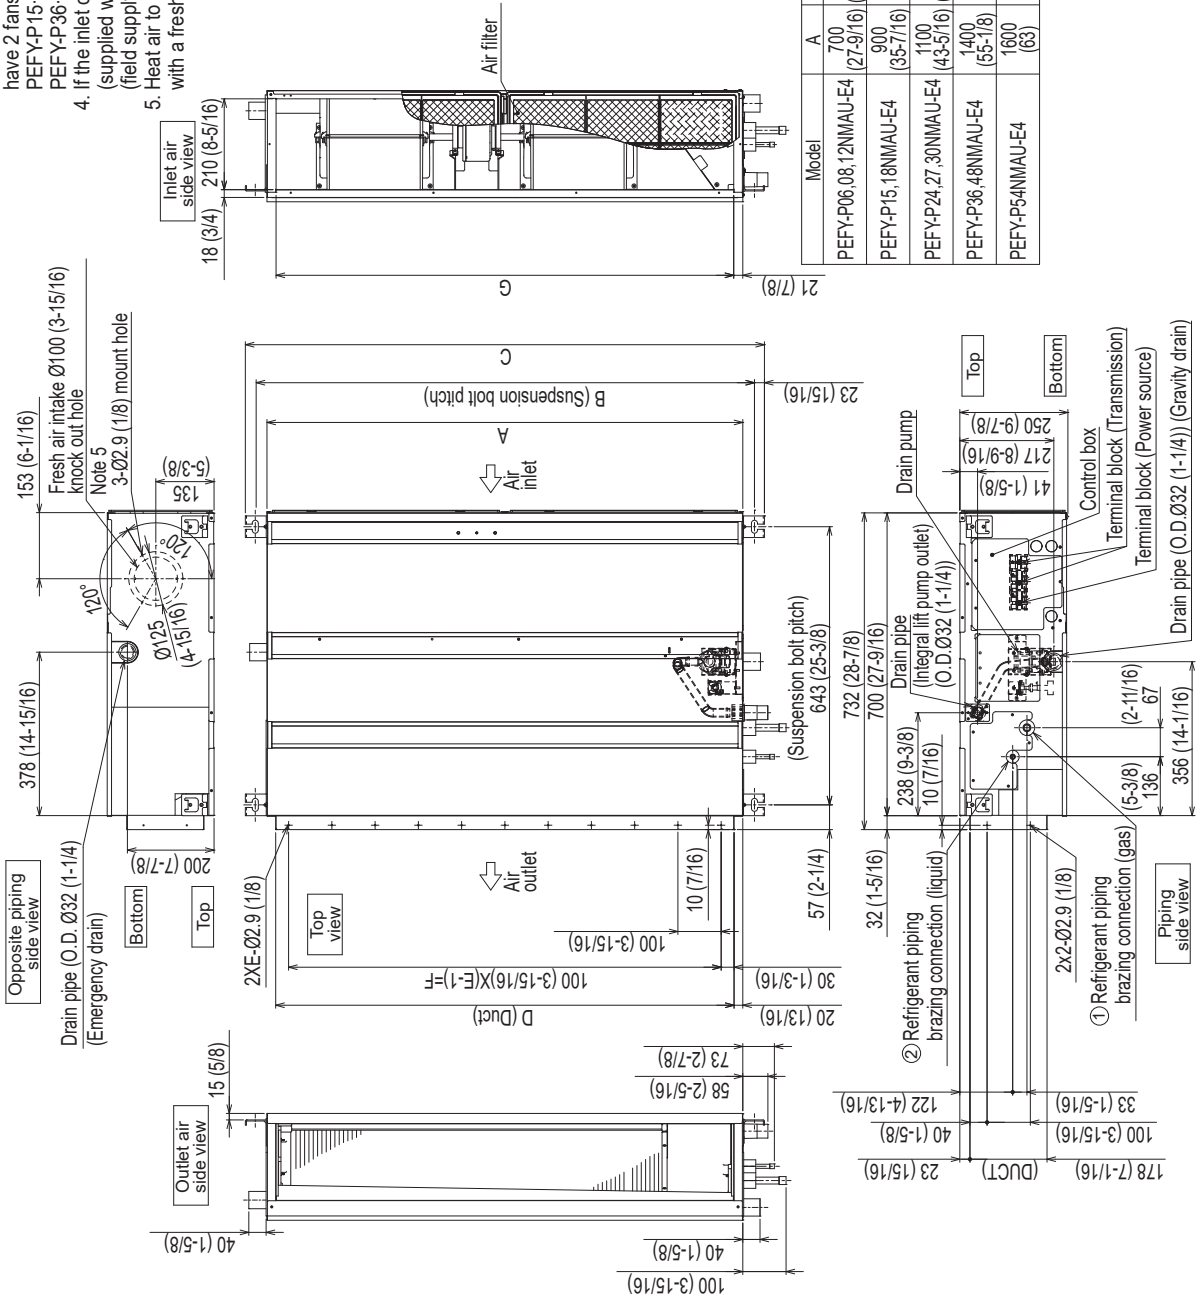


Model	Unit:mm(in.)	
	① Gas pipe	② Liquid pi
PEFY-P06,08,12NMAU-E4	Ø12.7 (1/2)	Ø6.35 (1/4)
PEFY-P15,18NMAU-E4		
PEFY-P24,27,30NMAU-E4	Ø15.88 (5/8)	Ø9.52 (3/8)
PEFY-P36,48NMAU-E4		
PEFY-P54NMAU-E4		

Model	Unit:mm(in.)						
	A	B	C	D	E	F	G
PEFY-P06,08,12NMAU-E4	700 (27-9/16)	754 (29-11/16)	800 (31-1/2)	660 (26)	7	600 (23-5/8)	658 (25-15/16)
PEFY-P15,18NMAU-E4	900 (35-7/16)	954 (37-9/16)	1000 (39-3/8)	860 (33-7/8)	9	800 (31-1/2)	858 (33-13/16)
PEFY-P24,27,30NMAU-E4	1100 (43-5/16)	1154 (45-7/16)	1200 (47-1/4)	1060 (41-3/4)	11	1000 (39-3/8)	1058 (41-11/16)
PEFY-P36,48NMAU-E4	1400 (55-1/8)	1454 (57-1/4)	1500 (59-1/16)	1360 (53-9/16)	14	1300 (51-3/16)	1358 (53-1/2)
PEFY-P54NMAU-E4	1600 (63)	1654 (65-1/8)	1700 (66-15/16)	1560 (61-7/16)	16	1500 (59-1/16)	1558 (61-3/8)

Unit : mm (in.)

**Fan Characteristics Curves:**

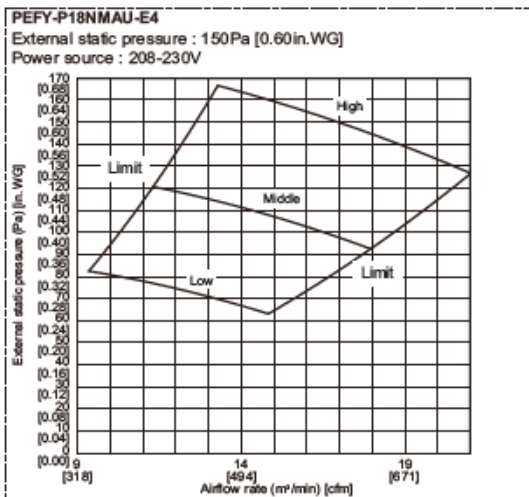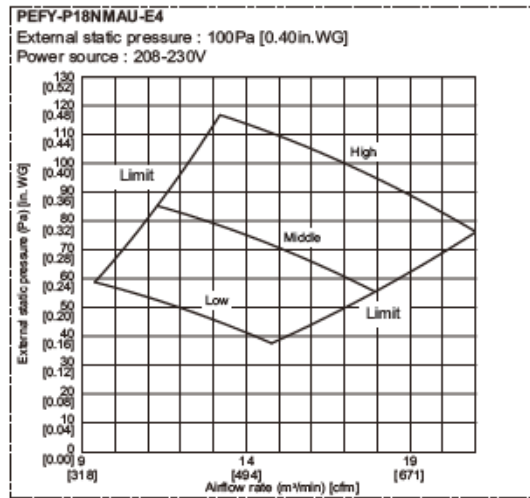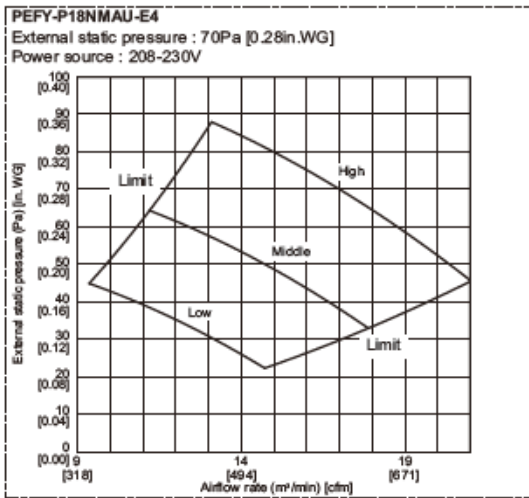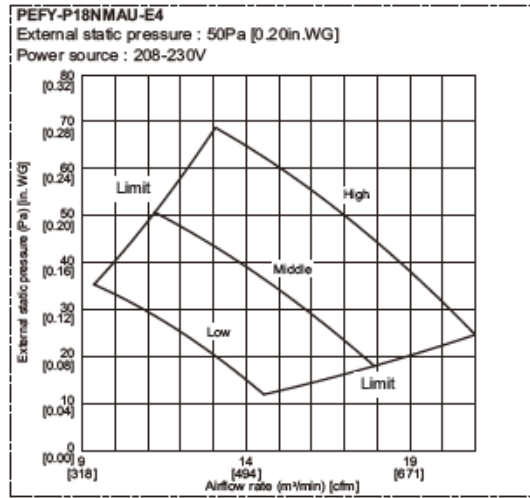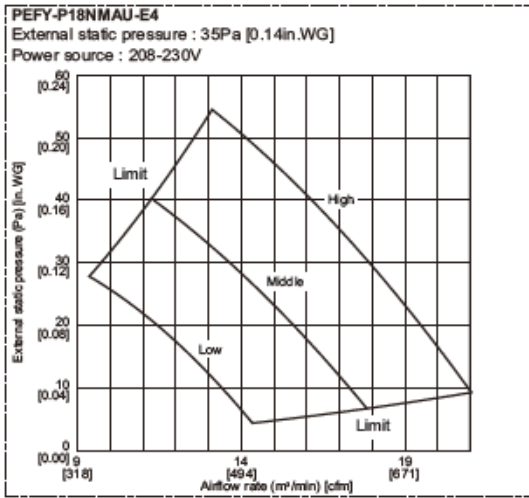

Note: MERV13 filter Box & Filter is not reflected in these displayed curves, reference Form # SB\_FBM2-Series\_Filter\_Boxes for full details.

