

Job Name:

Schedule Reference:

Date:



GENERAL FEATURES

- Dual set point functionality (*1)
- Compact floor-mount
- Two-speed settings
- Controls can be wall-mounted or unit-mounted in a hidden case
- IT Terminal Plug

OPTIONS

- ☐ External Heater Adapter..... PAC-YU25HT

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved accessories for proper functioning of the unit(s). Use of non-MESCA supported accessories will affect warranty coverage.

Note:

Ventilation air to be introduced independent of indoor units.

Please refer to local codes for the required ventilation rates specific to the application.

*1 – All components of the system must be compatible. For more details on system compatibility, please refer to Technical Bulletin 100-151 available on our website.

Notes:

SPECIFICATIONS

Capacity*

Cooling 15,000 Btu/h
Heating 17,000 Btu/h

Power

Power Source 208 / 230V, 1 phase, 60Hz

Power Consumption

Cooling (208/230V) 0.065 / 0.078 kW
Heating (208/230V) 0.065 / 0.078 kW

Current

Cooling (208/230V) 0.32 / 0.35 A
Heating (208/230V) 0.32 / 0.35 A

Minimum Circuit Ampacity (MCA *) (208/230V) . . . 0.40 / 0.44 A

Maximum Overcurrent Protection (MOCP) 15 A

*** All electrical work shall comply with National (CEC) and local codes and regulations.**

External Finish Acrylic paint (5Y 8/1)

Dimensions

Inches 24-13/16 h x 46-3/32 w x 8-11/16 d
mm 630 h x 1170 w x 220 d

Net Weight 58 lb / 26 kg

Fan

Type x Quantity Sirocco fan x 2
Airflow Rate (Low - High) 300 - 388 CFM
Motor Type Single phase induction motor

External Static Pressure 0" WG

Air Filter Standard

Refrigerant Pipe Dimensions (R410A)

Liquid 1/4" / 6.35 mm flare
Gas 1/2" / 12.7 mm flare

Drainpipe Dimension O.D. 1-3/32" / 27 mm


Sound Level (Low - High) 38 - 43 dB (A)

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:


Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB
Heating | Indoor: 70° F (21° C) DB, Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Model: PFFY-P15NEMU-E – DIMENSIONS

Unit : mm(in)

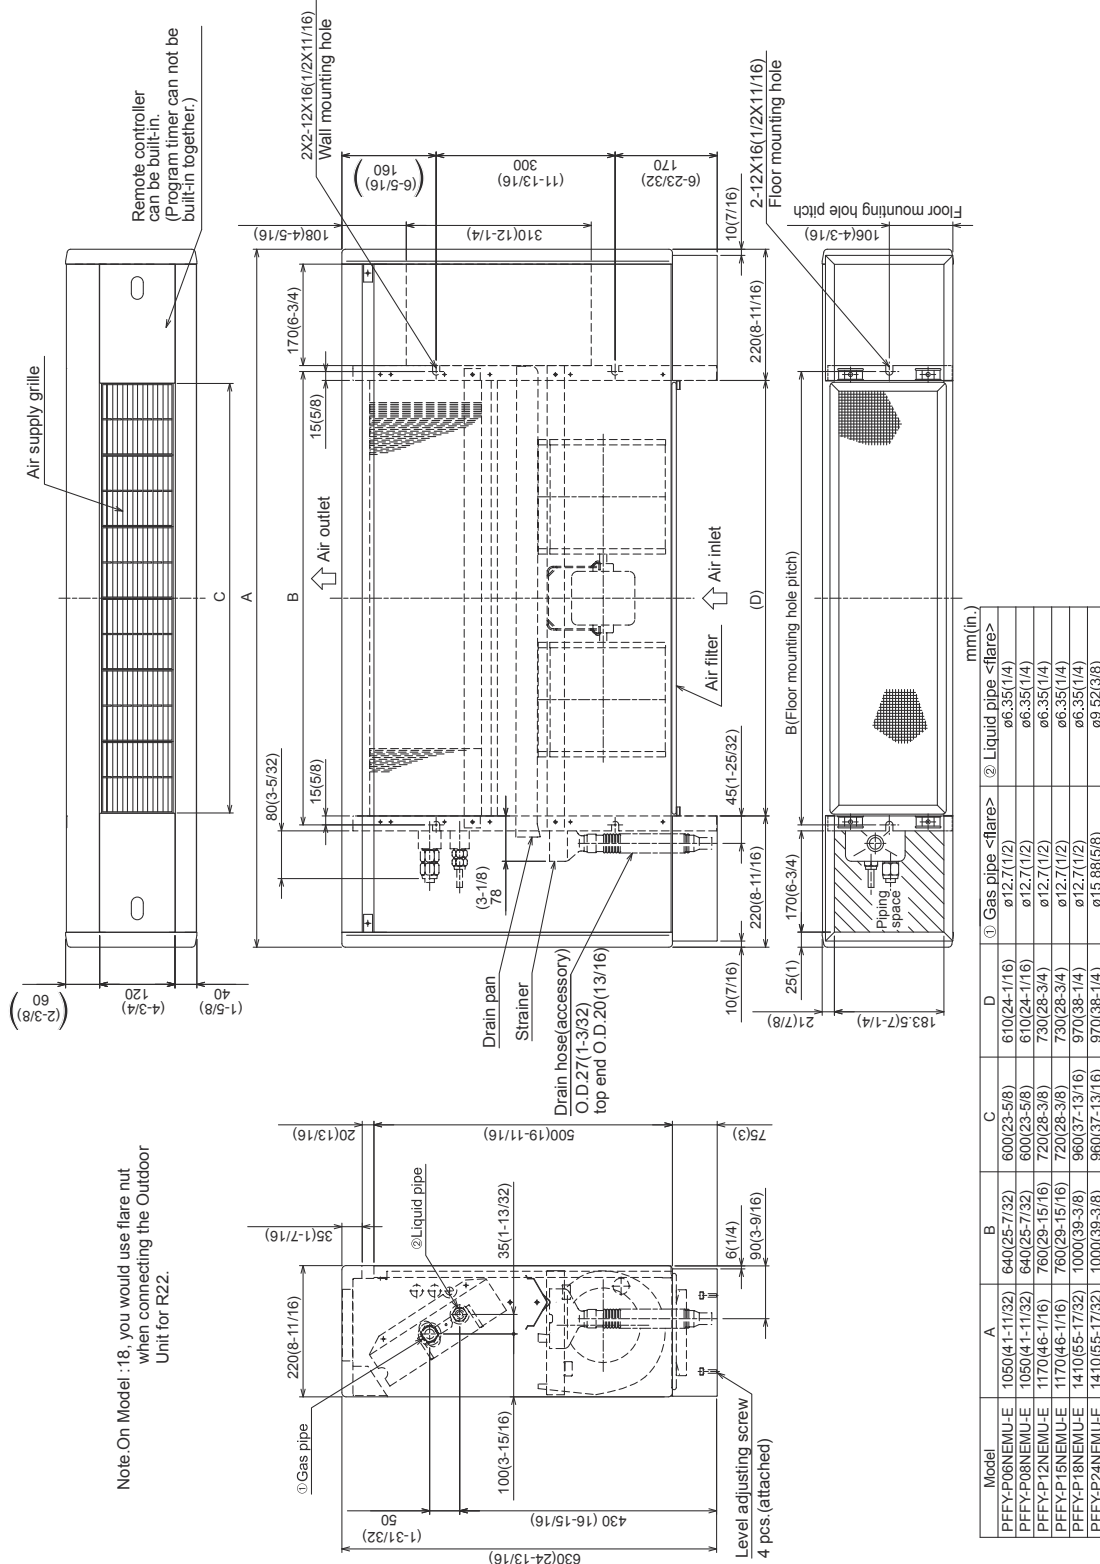

Note: On Model -18, you would use flare nut when connecting the Outdoor Unit for R22.

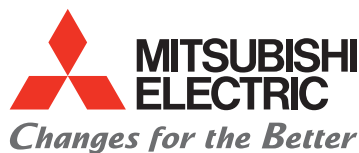

for a greener tomorrow

