

SUBMITTAL DATA: PKA-A18LA1-TH & PUY-A18NKA8

18,000 BTU/H WALL-MOUNTED AIR-CONDITIONING SYSTEM

Job Name:	Engineer:
Purchaser:	Application: ☐ Std. Cooling ☐ Ultra Low Ambient Cooling
Submitted To:	For: ☐ Reference ☐ Approval ☐ Construction
Submitted By:	Location:
System Designation:	Schedule No.:



UNIT OPTION:

Standard Model.....PUY-A18NKA8

ACCESSORIES:

Controls

Wireless Controller (MHK2)
Advanced Wired Controller (PAR-41MAAU)
Simple Wired Controller (PAC-YT53CRAU)
Wireless Remote Controller (PAR-FL32MA)
Interface Module (RMF-CA200)
M-NET Adapter (PAC-SJ96MA-E)

Outdoor Unit

Front Wind Guard (PFR-12-18)
Rear Wind Guard (PRE-12-18)
Side Wind Guard (PSD-12-18)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

SPECIFICATIONS:

Rated Conditions (Capacity / Input)*		
Cooling	Btu/h / W	18,000 / 1,680

* Rating Conditions per AHRI Standard:
Cooling | Indoor: 80°F (27°C) DB / 67°F (19°C) WB
Cooling | Outdoor: 95°F (35°C) DB / 75°F (24°C) WB

Capacity Range		
Cooling	Btu/h	5,600 - 18,000

Operating Range	
Cooling	-40F** (-40.0°C) to 115°F (46°C) DB

** Windscreens required for cooling operation below 23°F (-5°C)

AHRI Efficiency Rating	
EER2	13.3
SEER2	21.3

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz
-------------------------------	----------------------------

Minimum Circuit Ampacity (MCA) *	Breaker Size	MOCP (Outdoor)
Indoor 1 AMP	Outdoor 17 AMP	20 AMP
		28 AMP

*** All electrical work shall comply with National (CEC) and local codes and regulations.**

Indoor Unit			
Fan Motor (ECM)	F.L.A.	0.19	
Fan Motor Output	W	30	
SHF		0.64 / 0.73**	
Field Drainpipe Size O.D.	In.(mm)	5/8 (16)	Moisture Removal - 5.8pt./h

Outdoor Unit		
Compressor		
Fan Motor (ECM)	F.L.A.	0.5
Fan Motor Power	W	46

Airflow Rate (Low-Mid1-Mid2-Hi)			
Indoor (Cooling)	DRY	CFM	265-310-375-450
	WET		215-255-320-375
Outdoor	DRY		1,590

Sound Pressure Level		
Indoor (Low-Mid1-Mid2-Hi) (WET)	dB(A)	34-39-44-48
Outdoor		44

External Dimensions		
Indoor (H x W x D)	In.(mm)	11-25/32 x 35-23/64 x 9-11/32 (299 x 898 x 237)
Outdoor (H x W x D)		24-13/16 x 31-13/16 + 7/16 x 11-3/16 (630 x 809 + 62 x 300)

Net Weight		
Indoor	Lbs.(kg)	28 (12.7)
Outdoor		99 (44)


External Finish	
Indoor	White Munsel No. 0.7PB 9.2/0.4
Outdoor	Ivory Munsell No. 3Y 7.8 / 1.1

Refrigerant	R410A ; 4lbs.,14oz. (2.2kg)
-------------	-----------------------------

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)
Maximum Total Refrigerant Pipe Length	Ft. (m)	165 (50)
Maximum Vertical Separation	Ft. (m)	100 (30)

Specifications are subject to change without notice.

Unit: in. (mm)

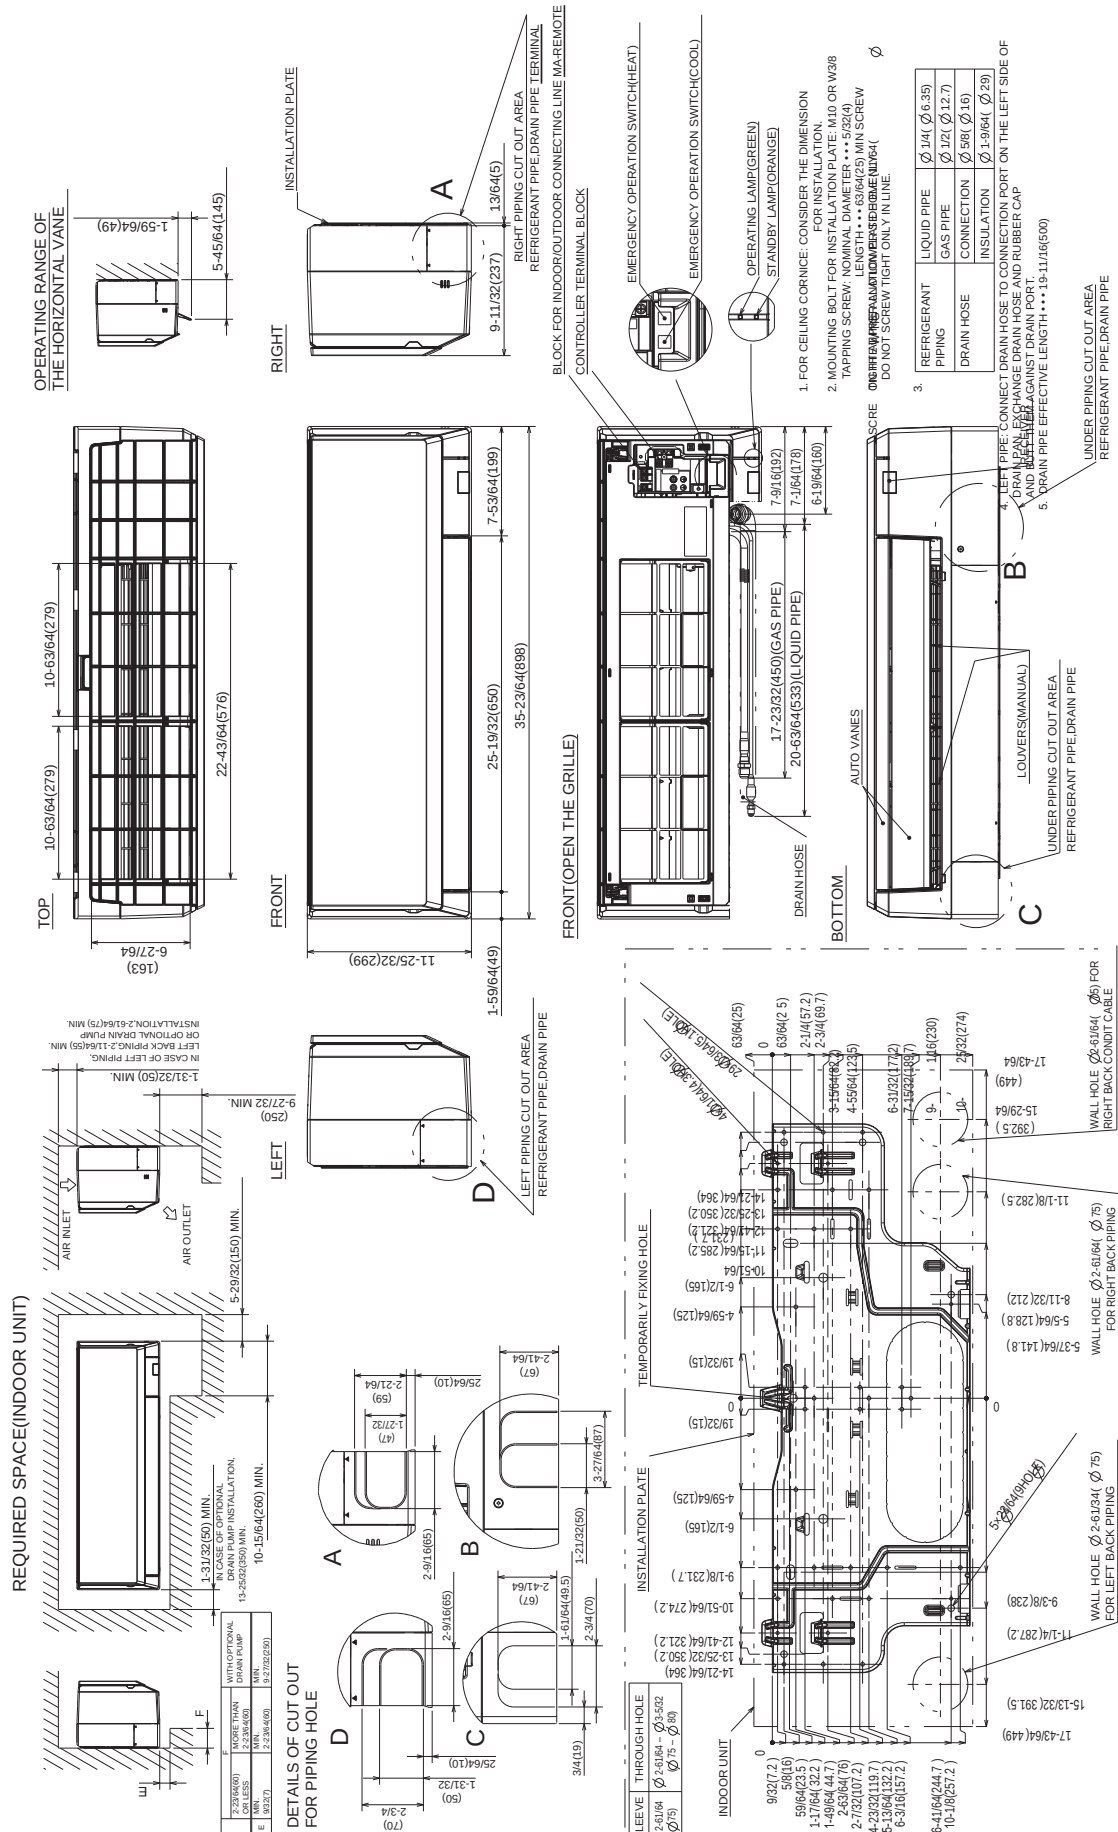

Form # SB PKA-A18LA1-TH PUY-A18NKA8 202412

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.


DIMENSIONS: PUY-A18NKA8

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

FREE SPACE AROUND THE OUTDOOR UNIT (BASIC EXAMPLE)



PIPING-WIRING DIRECTION

PIPING AND WIRING CONNECTION CAN
BE MADE FROM THE REAR DIRECTION ONLY.

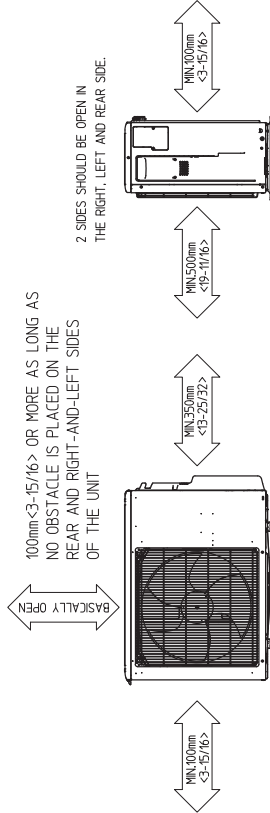

FOUNDATION BOLTS

PLEASE SECURE THE BASE OF
THE UNIT FIRMLY USING M10-W3/8>
FOUNDATION BOLTS AT FOUR PLACES
WITH A NUT.
(BOLTS, WASHERS AND NUT MUST
BE PURCHASED LOCALLY).

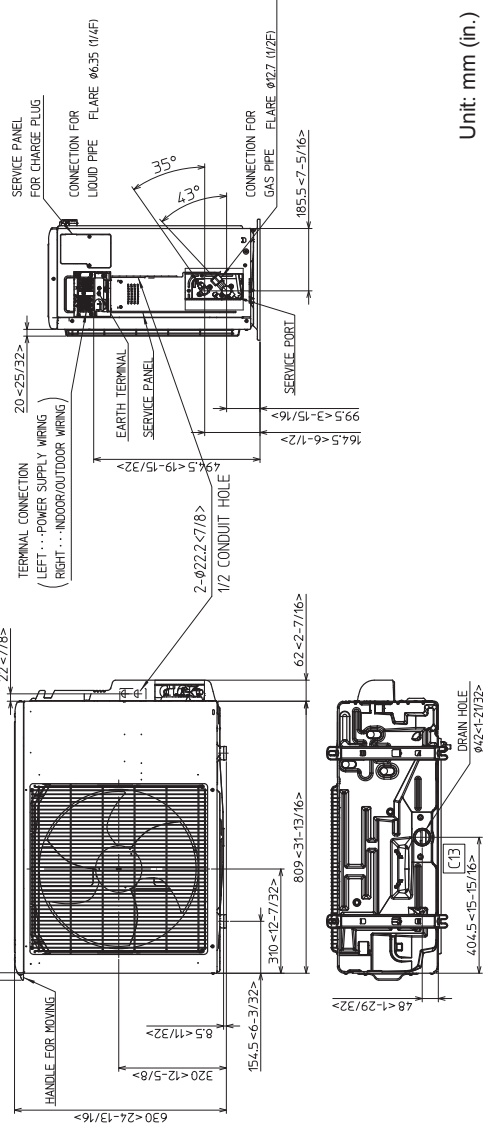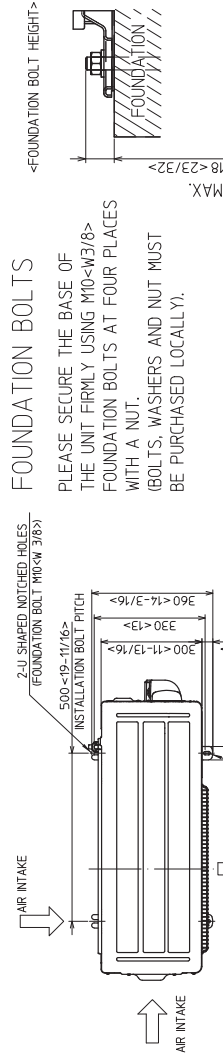

Unit: mm (in.)

