

Job Name:

Schedule Reference:

Date:

**GENERAL FEATURES**

- Dual set point functionality (*1)
- Lightweight and compact design
- Four-speed fan settings
- Built-in condensate lift mechanism
- Ventilation air intake supported
- IT Terminal Plug

OPTIONS

☐ External Heater Adapter..... PAC-YU25HT

ACCESSORIES:

Grille.....(Required ordered separately) PMP-16BMUW

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB

Cooling | Outdoor: 95° F (35° C) DB

Heating | Indoor: 70° F (21° C) DB

Heating | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved accessories for proper functioning of the unit(s). Use of non-MESCA supported accessories will affect warranty coverage.

Note:

Ventilation air to be introduced independent of or in series with VRF indoor units.

Please refer to local codes for the required ventilation rates specific to the application.

*1 – All components of the system must be compatible. For more details on system compatibility, please refer to Technical Bulletin 100-151 available on our website.

Notes:

SPECIFICATIONS**Capacity***

Cooling 15,000 Btu/h

Heating 17,000 Btu/h

Power

Power Source 208 / 230V, 1 phase, 60Hz

Power Consumption

Cooling 0.05 kW

Heating 0.05 kW

Current

Cooling 0.26 A

Heating 0.26 A

Minimum Circuit Ampacity (MCA *) 0.33 A

Maximum Overcurrent Protection (MOCP) 15 A

***All electrical work shall comply with National (CEC) and local codes and regulations.**

External Finish Grille: 6.4Y 8.9/0.4

Dimensions

Inches 9-1/16" h x 31-31/32" w x 15-9/16" d

mm 230 h x 812 w x 395 d

Grille

Inches 1-3/16" h x 39-3/8" w x 18-17/32" d

mm 30 h x 1000 w x 470 d

Net Weight

Unit 31 lb / 14 kg

Grille 7 lb / 3 kg

Coil Type Cross fin

Fan

Type x Quantity Line flow fan x 1

Airflow Rate (Low-Mid1-Mid2-High) .. 272 -307 -343 -378 CFM

Motor Type DC brushless motor

Air Filter PP honeycomb

Refrigerant Pipe Dimensions (R401A)


Liquid 1/4" / 6.35 mm flare

Gas 1/2" / 12.7 mm flare

Drainpipe Dimension O.D. 1" / 26 mm

Sound Level (Low-Mid1-Mid2-High) 33 -35 -37 -39 dB (A)

Model: PMFY-P15NBMU-ER5 – DIMENSIONS

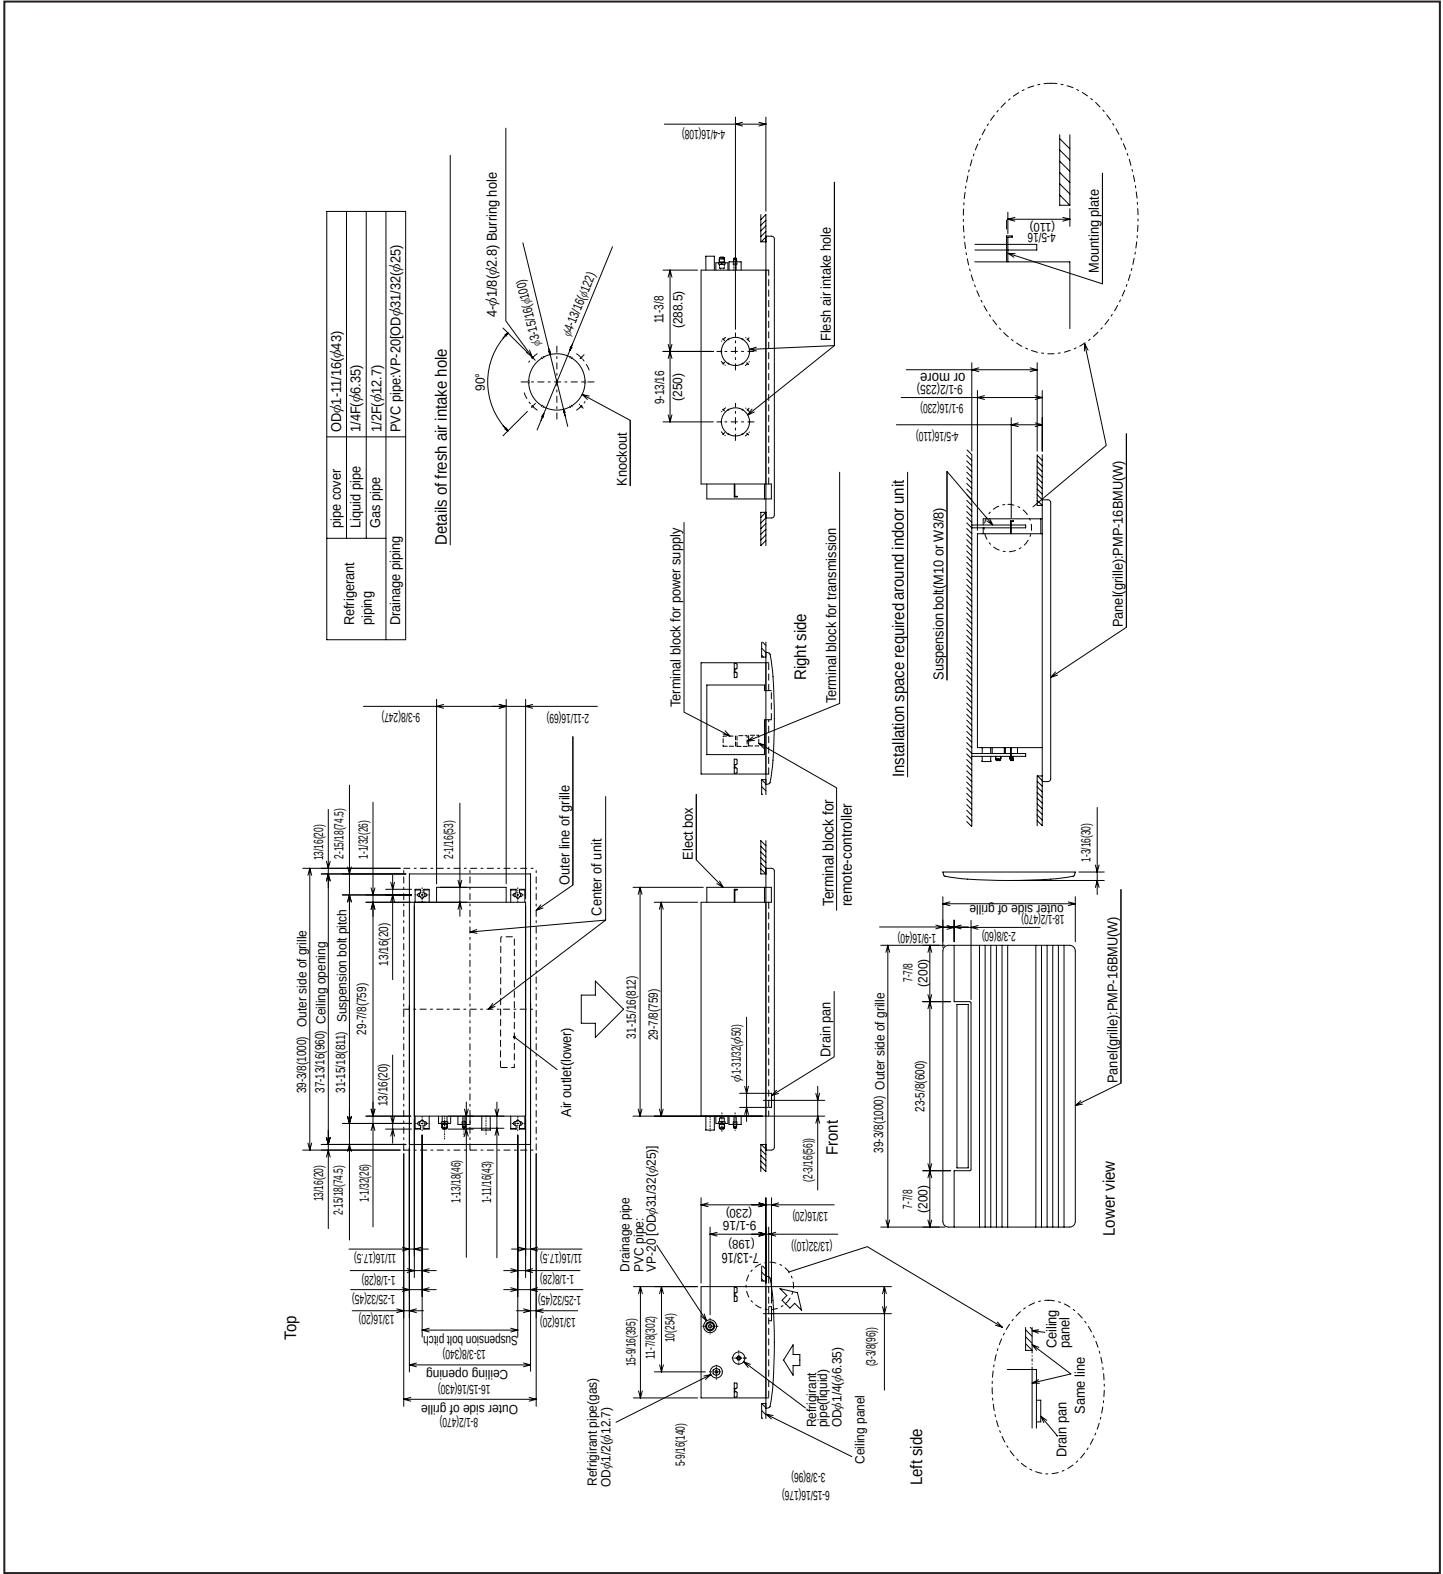

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

