

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PUHY-EP120TNU-A-TH

Seacoast (BS) Model PUHY-EP120TNU-A-TH-BS

Minimum Operating Temperature

Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E) (x1)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

1. Cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F DB, 67°F WB, (26.7°C DB, 19.4°C WB), Outdoor: 95°F DB, (35°C DB)
2. Heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F DB, (21.1°C DB), Outdoor: 47°F DB, 43°F WB, (8.3°C DB, 6.1°C WB)
3. Cooling mode/Heating mode
4. External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

Outdoor Model				PUHY-EP120TNU-A (-BS)				
Indoor Model				Non-Ducted		Ducted		
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz				
Cooling capacity *1 (Nominal)			BTU/h		120,000			
			kW		35.2			
			Power input		kW			8.19
			(208-230) Current input		A			25.2-22.8
(Rated)			BTU/h		115,000			
			kW		33.7			
			Power input		kW		10.41	10.38
			(208-230) Current input		A		32.1-29.0	32.0-28.9
Temp. range of cooling			Indoor		W.B. 59~75°F (15~24°C)			
			Outdoor		D.B. 23~126°F (-5~52°C)			
Heating capacity *2 (Nominal)			BTU/h		135,000			
			kW		39.6			
			Power input		kW			9.63
			(208-230) Current input		A			29.7-26.8
(Rated)			BTU/h		129,000			
			kW		37.8			
			Power input		kW		8.66	9.06
			(208-230) Current input		A		26.7-24.1	27.9-25.2
Temp. range of heating			Indoor		D.B. 59~81°F (15~27°C)			
			Outdoor		W.B. -13~60°F (-25~15.5°C)			
Indoor unit connectable			Total capacity		50~130% of outdoor unit capacity			
			Model/Quantity		P04~P96/1~30			
Sound power level (measured in anechoic room) *3				dB <A>		79.5/81.0		
Refrigerant piping diameter			Liquid pipe		in. (mm)			3/8 (9.52) Brazed (1/2 (12.7) Brazed, the farthest pipe length >= 40 m)
			Gas pipe		in. (mm)			1-1/8 (28.58) Brazed
Minimum Circuit Ampacity (*)				A		55-49		
Maximum Overcurrent Protection (*)				A		90-80		
FAN			Type x Quantity		Propeller fan x 2			
			Airflow rate		cfm			7,750
					m3/min			220
			Control, Driving mechanism		Inverter-control, Brushless DC motor			
			Motor output		kW		0.46+0.46	
			*4 External static press.		0 in.WG (0 Pa)			
Compressor			Type x Quantity		Inverter scroll hermetic compressor x 1			
			Starting method		Inverter			
			Motor output		kW		7.4 x 1	
			Case heater		kW		-	
			Lubricant		MEL32			
External finish				Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>				
External dimension H x W x D			in.		71-5/8 x 48-7/8 x 29-3/16			
			mm		1,818 x 1,240 x 740			
Protection devices			High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
			Inverter circuit (COMP./FAN)		Over-current protection			
			Fan motor		-			
Refrigerant			Type x original charge		R410A x 21 lbs + 9 oz (9.8 kg)			
			Control		LEV and HIC circuit			
Net weight				lbs (kg)		633 (287)		
Heat exchanger				Salt-resistant cross fin & aluminium tube				
HIC circuit (HIC: Heat Inter-Changer)				Copper pipe, tube-in-tube structure				
Defrosting method				Auto-defrost mode (Reversed refrigerant cycle)				
Optional parts				Joint: CMY-Y102SS/102LS-G2,CMY-Y202S-G2 Header: CMY-Y104/108/1010C-G				

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Unit: mm (in.)

Note 1, Please refer to the next page for information regarding necessary spacing around the unit and foundation work.


2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Service valve
	Liquid	Gas	
EP-96	ø9.52(3/8) Brazed (ø12.7(1/2) Brazed) ^{1,3}	ø22.2(7/8) Brazed ^{1,2}	
EP-120	ø9.52(3/8) Brazed (ø12.7(1/2) Brazed) ^{1,2,4}		ø12.7(1/2)
EP-144	ø12.7(1/2) Brazed	ø28.58(1-1/8) Brazed	ø28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.
 *2 Indicates dimensions and connection specifications in the case the unit is used in combination with other outdoor units.
 *3 Furthest piping length (OU from IU)≥90m
 *4 Furthest piping length (OU from IU)≥40m

NO.	Usage	Specifications
①	Front through hole	148(5/7/8) × 84(3/5/16) Knockout hole
②	For pipes	Bottom through hole 150(5/15/16) × 84(3/3/4) Knockout hole
③		Front through hole ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④	For wires	Front through hole ø43.7(1-3/4) or ø22.2(7/8) Knockout hole
⑤		Bottom through hole ø65(2-9/16) Knockout hole
⑥	Bottom through hole	ø52(2-1/16) Knockout hole
⑦	Front through hole	ø34(1-3/8) Knockout hole
⑧	For transmission cables	Bottom through hole ø24(1-2/3) Knockout hole

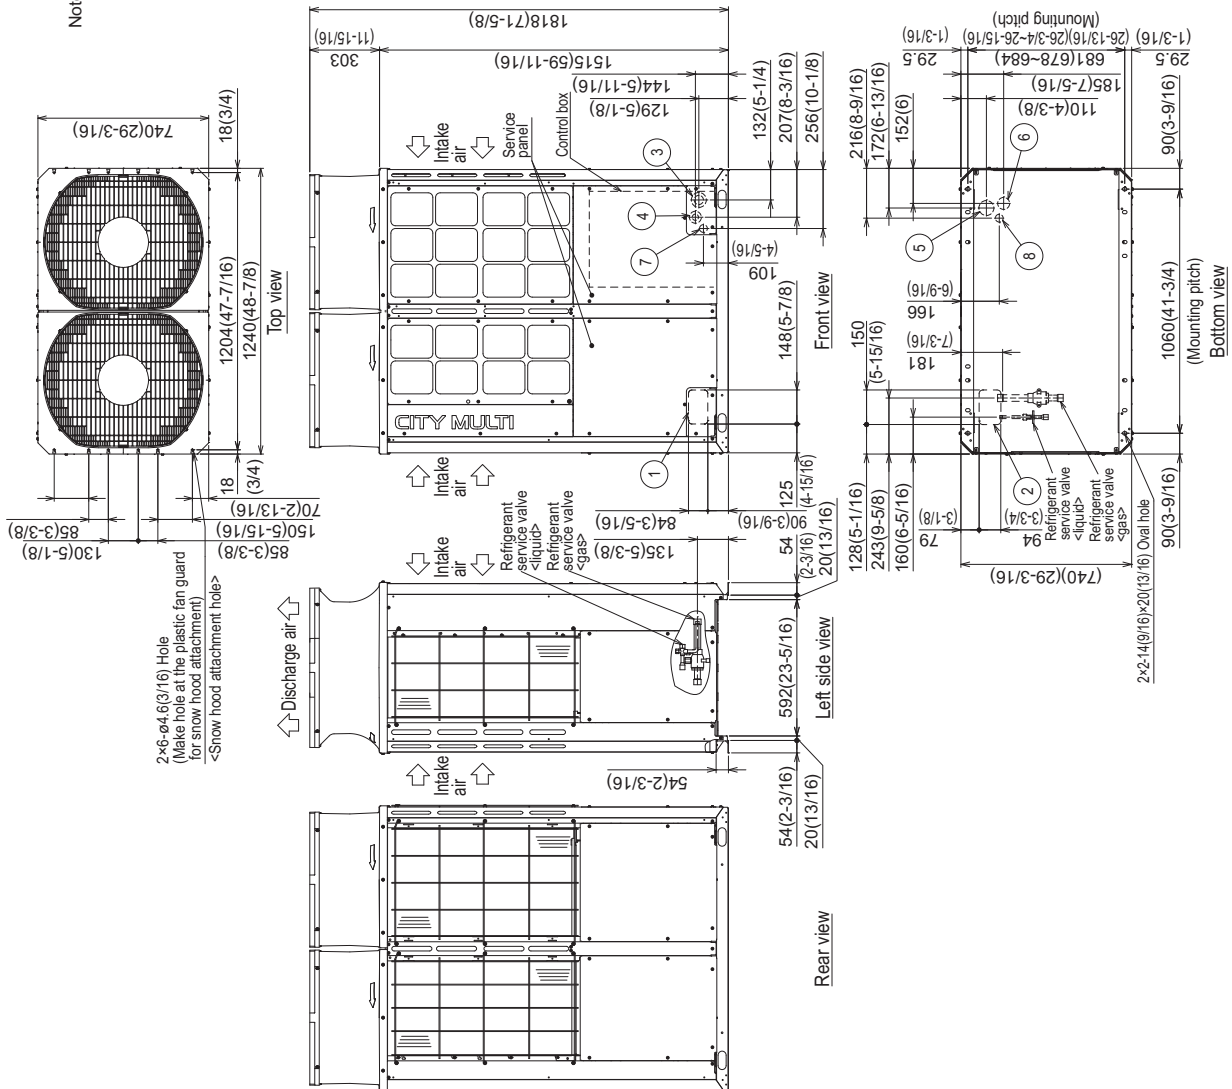

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.