

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PUHY-EP216TNU-A

Seacoast (BS) Model PUHY-EP216TNU-A-BS

Minimum Operating Temperature

Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See CM_PAB_100_20_006)

Panel Heater - (PAC-PH03EHYU-E1) (x1)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

- Cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
- Heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
- Cooling mode/Heating mode
- The sound pressure level measured by the conventional method in JIS for reference purpose.
- External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

Outdoor Model				PUHY-EP216TNU-A (-BS)				
Indoor Model				Non-Ducted		Ducted		
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz				
Cooling capacity *1 (Nominal)			BTU/h		216,000			
			kW		63.3			
(208-230)			Power input		kW			18.33
			Current input		A			56.5-51.1
(Rated)			BTU/h		206,000			
			kW		60.4			
(208-230)			Power input		kW		20.56	20.13
			Current input		A		63.4-57.3	62.0-56.1
Temp. range of cooling			Indoor		W.B.		59~75°F (15~24°C)	
			Outdoor		D.B.		23~126°F (-5~52°C)	
Heating capacity *2 (Nominal)			BTU/h		243,000			
			kW		71.2			
(208-230)			Power input		kW			20.00
			Current input		A			61.6-55.7
(Rated)			BTU/h		232,000			
			kW		68.0			
(208-230)			Power input		kW		17.79	18.92
			Current input		A		54.8-49.6	58.3-52.7
Temp. range of heating			Indoor		D.B.		59~81°F (15~27°C)	
			Outdoor		W.B.		-13~60°F (-25~15.5°C)	
Indoor unit connectable			Total capacity		50~130% of outdoor unit capacity			
			Model/Quantity		P04~P96/2~50			
Sound power level (measured in anechoic room) *3				dB <A>		88.0-86.5		
Refrigerant piping diameter			Liquid pipe		in. (mm)			5/8 (15.88) Braze
			Gas pipe		in. (mm)			1-3/8 (34.93) Braze
Minimum Circuit Ampacity (*)				A		88-80		
Maximum Overcurrent Protection (*)				A		150-125		
FAN			Type x Quantity		Propeller fan x 2			
			Airflow rate		cfm			14100 / 13750
					m3/min			400 / 390
			Control, Driving mechanism		Inverter-control, Brushless DC motor			
			Motor output		kW		0.92+0.92	
*5 External static press.			0 in.WG (0 Pa)					
Compressor			Type x Quantity		Inverter scroll hermetic compressor x 1			
			Starting method		Inverter			
			Motor output		kW		15.8 x 1	
			Case heater		kW		-	
			Lubricant		MEL32			
External finish				Pre-coated galvanized steel sheet (+powder coating for -BS type)				
				<MUNSELL 5Y 8/1>				
External dimension H x W x D			in.		71-5/8 x 68-15/16 x 29-3/16			
			mm		1,818 x 1,750 x 740			
Protection devices			High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
			Inverter circuit (COMP./FAN)		Over-current protection			
			Fan motor		-			
Refrigerant			Type x original charge		R410A x 26 lbs + 1 oz (11.8 kg)			
			Control		LEV and HIC circuit			
Net weight			lbs (kg)		874 (396)			
Heat exchanger				Salt-resistant cross fin & aluminium tube				
HIC circuit (HIC: Heat Inter-Changer)				Copper pipe, tube-in-tube structure				
Defrosting method				Auto-defrost mode (Reversed refrigerant cycle)				
Optional parts			Joint: CMY-Y102SS/102LS-G2,CMY-Y202S/302S-G2 Header: CMY-Y104/108/1010C-G					

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PUHY-EP216TNU-A(-BS) - DIMENSIONS


Unit: mm (in.)

Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Diameter			
	Refrigerant pipe	Service valve	Liquid	Gas
EP216	ø15.88(5/8) Brazed ø34.93(1-3/8) Brazed	ø15.88(5/8)	ø28.58(1-1/8)	
EP240	ø15.88(5/8) Brazed ø34.93(1-3/8) Brazed *1	ø15.88(5/8)	ø28.58(1-1/8)	

*1 Use a pipe joint (locally procured) and connect to the refrigerant service valve.

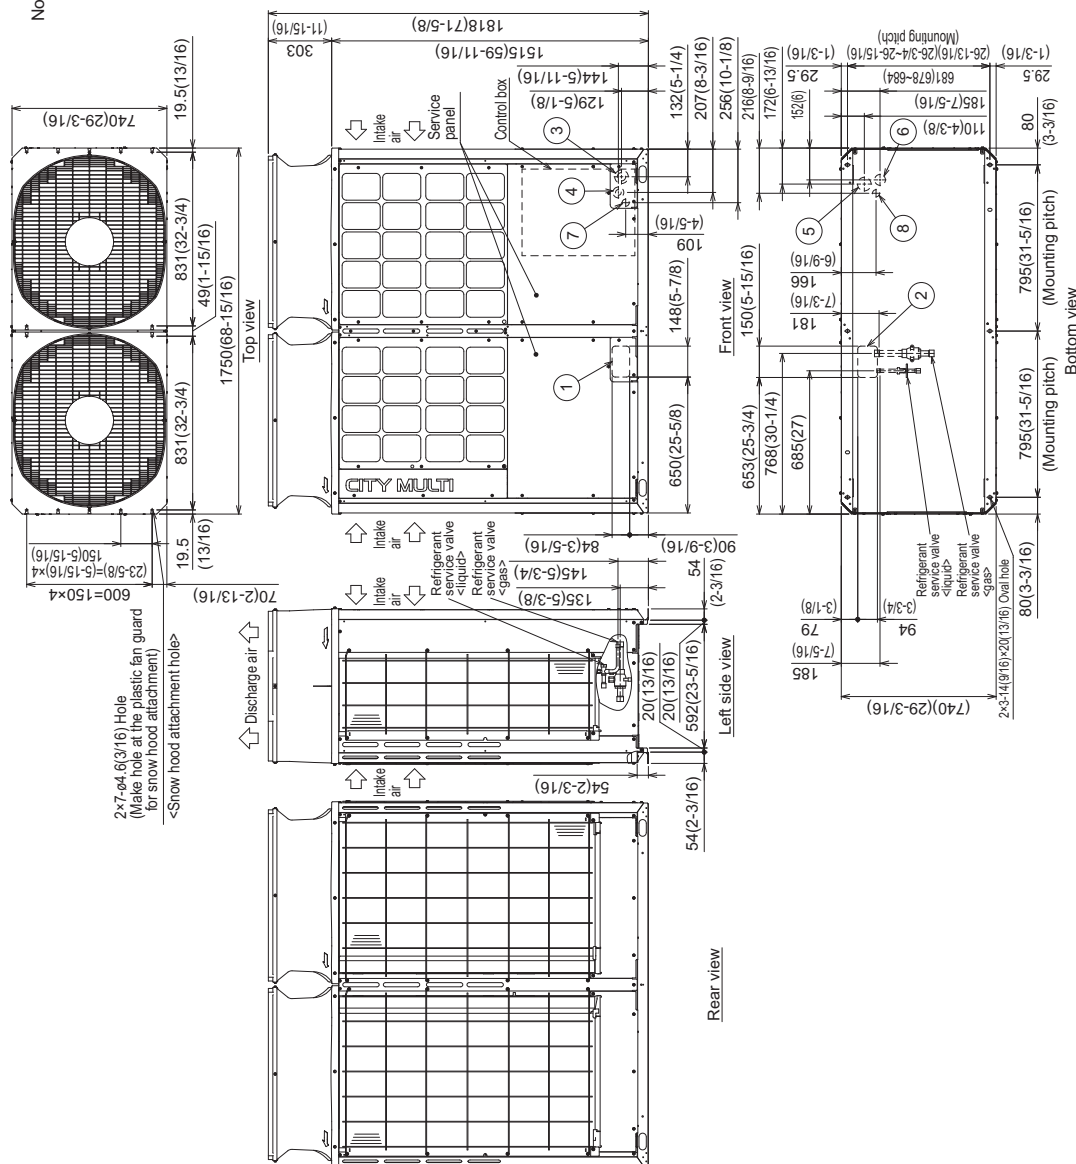

NO.	Usage	Specifications
①	Front through hole	148(5-7/8) x 84(3-5/16) Knockout hole
②	Bottom through hole	150(5-15/16) x 94(3-3/4) Knockout hole
③	Front through hole	ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④	Front through hole	ø43.7(1-3/4) or ø22.2(7/8) Knockout hole
⑤	Bottom through hole	ø65(2-9/16) Knockout hole
⑥	Bottom through hole	ø52(2-1/16) Knockout hole
⑦	Front through hole	ø34(1-3/8) Knockout hole
⑧	Bottom through hole	ø34(1-3/8) Knockout hole

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.