

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PUHY-EP384TSNU-A-TH

Seacoast (BS) Model PUHY-EP384TSNU-A-TH-BS

Minimum Operating Temperature
Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E) (x3)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Outdoor Model		PUHY-EP384TSNU-A (-BS)	
Indoor Model		Non-Ducted	Ducted
Power source		3-phase 3-wire 208-230 V ±10% 60 Hz	
Cooling capacity *1 (Nominal)	BTU/h	384,000	
	kW	112.5	
	Power input	31.41	
	(208-230) Current input	96.8-87.6	
	(Rated)		
(208-230)	BTU/h	364,000	
	kW	106.7	
	Power input	38.77	35.47
	(208-230) Current input	119.5-108.1	109.3-98.9
	(Rated)		
Temp. range of cooling	Indoor	W.B. 59~75°F (15~24°C)	
	Outdoor	D.B. 23~126°F (-5~52°C)	
	BTU/h	430,000	
	kW	126.0	
	Power input	35.13	
Heating capacity *2 (Nominal)	(208-230) Current input	108.3-97.9	
	(Rated)		
	BTU/h	410,000	
	kW	120.2	
	Power input	32.96	31.88
Temp. range of heating	(208-230) Current input	101.6-91.9	98.3-88.9
	Indoor	D.B. 59~81°F (15~27°C)	
	Outdoor	W.B. -13~60°F (-25~15.5°C)	
	Total capacity	50~130% of outdoor unit capacity	
	Model/Quantity	P04~P96/2~50	
Indoor unit connectable			
Sound power level (measured in anechoic room) *3		dB <A> 86.5/87.0	
Refrigerant	Liquid pipe	in. (mm) 3/4 (19.05) Braze	
	Gas pipe	in. (mm) 1-5/8 (41.28) Braze	

Set Model

Model		PUHY-EP144TNU-A (-BS)	PUHY-EP120TNU-A (-BS)	PUHY-EP120TNU-A (-BS)
Minimum Circuit Ampacity (*)		A 60-60	55-49	55-49
Maximum Overcurrent Protection (*)		A 100-100	90-80	90-80
FAN	Type x Quantity	Propeller fan x 2	Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm 9,200	7,750	7,750
		m3/min 260	220	220
	Control, Driving mechanism	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW 0.46+0.46	0.46+0.46	0.46+0.46
Compressor	*4 External static press.	0 in.WG (0 Pa)	0 in.WG (0 Pa)	0 in.WG (0 Pa)
	Type x Quantity	Inverter scroll hermetic compressor x 1	Inverter scroll hermetic compressor x 1	Inverter scroll hermetic compressor x 1
	Starting method	Inverter	Inverter	Inverter
	Motor output	kW 9.3 x 1	7.4 x 1	7.4 x 1
	Case heater	kW -	-	-
External finish		Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>
External dimension H x W x D		in. 71-5/8 x 48-7/8 x 29-3/16 mm 1,818 x 1,240 x 740	71-5/8 x 48-7/8 x 29-3/16 1,818 x 1,240 x 740	71-5/8 x 48-7/8 x 29-3/16 1,818 x 1,240 x 740
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)	Over-current protection	Over-current protection	Over-current protection
	Fan motor	-	-	-
Refrigerant	Type x original charge	R410A x 23 lbs + 12 oz (10.8 kg)	R410A x 21 lbs + 9 oz (9.8 kg)	R410A x 21 lbs + 9 oz (9.8 kg)
	Control	LEV and HIC circuit		
Net weight		lbs (kg) 680 (308)	633 (287)	633 (287)
Heat exchanger		Salt-resistant cross fin & aluminium tube	Salt-resistant cross fin & aluminium tube	Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure	Copper pipe, tube-in-tube structure	Copper pipe, tube-in-tube structure
Pipe between unit and distributor	Liquid pipe	in. (mm) 1/2 (12.7) Braze	1/2 (12.7) Braze	1/2 (12.7) Braze
	Gas pipe	in. (mm) 1-1/8 (28.58) Braze	1-1/8 (28.58) Braze	1-1/8 (28.58) Braze
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle)		
Optional parts		Outdoor Twinning kit: CMY-Y300CBK2 Joint: CMY-Y102SS/102LS-G2, CMY-Y202S/302S-G2 Header: CMY-Y104/108/1010C-G		

Notes:


- Cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
- Heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
- Cooling mode/Heating mode
- External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PUHY-EP384TSNU-A-TH(-BS) - DIMENSIONS

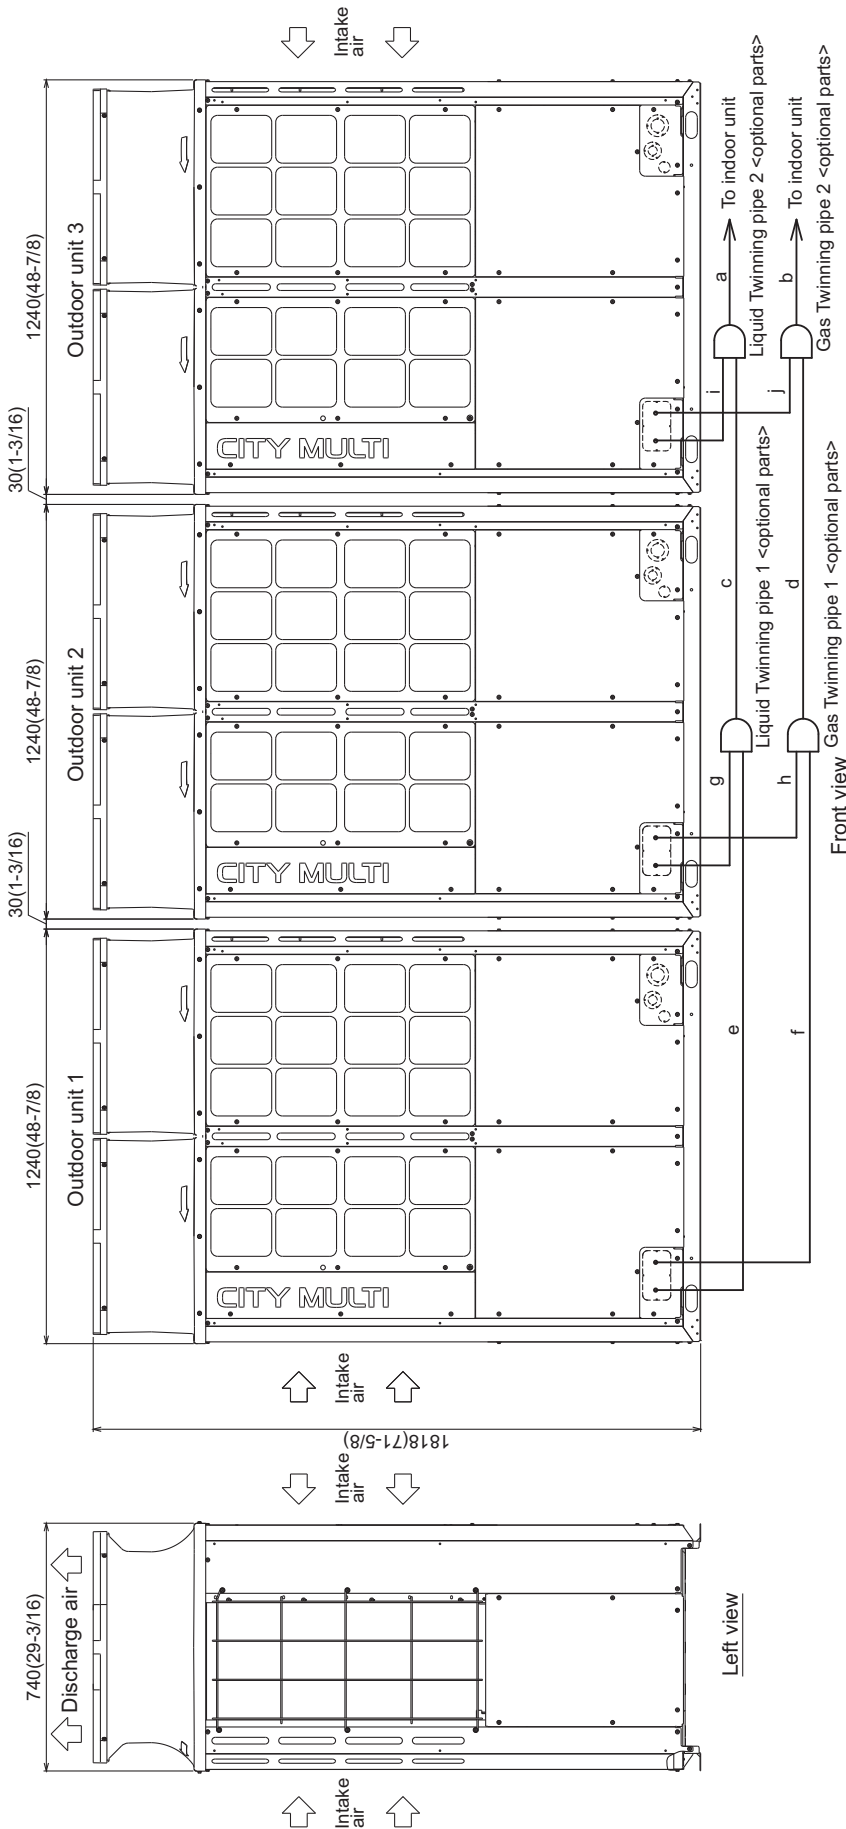

Twinning pipe connection size

Package unit name		PUHY-EP336TNU-A-(BS)	PUHY-EP360TNU-A-(BS)	PUHY-EP384TNU-A-(BS)	PUHY-EP408TNU-A-(BS)	PUHY-EP432TNU-A-(BS)
Component unit name	Outdoor unit 1	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP144TNU-A-(BS)	PUHY-EP144TNU-A-(BS)
	Outdoor unit 2	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP144TNU-A-(BS)	PUHY-EP144TNU-A-(BS)
	Outdoor unit 3	PUHY-EP96TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP120TNU-A-(BS)	PUHY-EP144TNU-A-(BS)
Outdoor Twinning Kit(optional parts)		CMY-Y300CBK2				
Indoor unit~Twinning pipe 2	Liquid	ø19.05(3/4)				
	Gas	ø41.28(1-5/8)				
		ø19.05(3/4)				
Twinning pipe 1~Twinning pipe 2	Liquid	ø34.93(1-3/8)				
	Gas	ø34.93(1-3/8)				
		ø34.93(1-3/8)				

Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.

2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.

Be sure to see the Installation Manual for details of Twinning pipe installation.

3. The pipe section before the Twinning pipe (section "a" and "b" in the figure) must have at least 500mm(19-11/16) of straight section

(*including the straight pipe that is supplied with the Twinning pipe).

4. Only use the Twinning pipe by Mitsubishi (optional parts).

	Unit model	Liquid e or g or i	Gas f or h or j
Twinning pipe-Outdoor unit	EP96	ø9.52(3/8)	ø22.2(7/8)
	EP120	ø12.7(1/2)	ø28.58(1-1/8)
	EP144	ø12.7(1/2)	ø38.58(1-1/8)
	EP144	ø12.7(1/2)	ø38.58(1-1/8)

Unit: mm (in.)

Specifications are subject to change without notice.

Module: PUHY-EP120_144TNU-A-TH(-BS) - DIMENSIONS

Unit: mm (in.)


Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C (248°F).

Connecting pipe specifications

Model	Diameter		
	Refrigerant pipe	Service valve	
EP96	Liquid ø9.52(3/8) Braze ø12.7(1/2) Braze*1,3	Gas ø22.2(7/8) Braze*1,2	Gas ø12.7(1/2) ø28.58(1-1/8)
EP120	Liquid ø9.52(3/8) Braze ø12.7(1/2) Braze*1,2,4	Gas ø22.2(7/8) Braze*1,2	Gas ø12.7(1/2) ø28.58(1-1/8)
EP144	Liquid ø12.7(1/2) Braze	Gas ø28.58(1-1/8) Braze	Gas ø12.7(1/2) ø28.58(1-1/8)

- *1 Connect the refrigerant pipe to the service valve according to the Installation Manual.
- *2 Indicates dimensions and connection specifications in the case the unit is used in combination with other outdoor units.
- *3 Furthest piping length (OU from IU) ≥ 90m
- *4 Furthest piping length (OU from IU) ≥ 40m

No.	Usage	Specifications
①	For pipes	Front through hole 145(5-7/8) × 84(3-5/16) Knockout hole
②		Bottom through hole 150(5-15/16) × 94(3-3/4) Knockout hole
③		Front through hole ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④		Front through hole ø43.7(1-3/4) or ø22.2(7/8) Knockout hole
⑤	For wires	Bottom through hole ø65(2-9/16) Knockout hole
⑥		Bottom through hole ø52(2-1/16) Knockout hole
⑦	For transmission cables	Front through hole ø34(1-3/8) Knockout hole
⑧		Bottom through hole ø34(1-3/8) Knockout hole

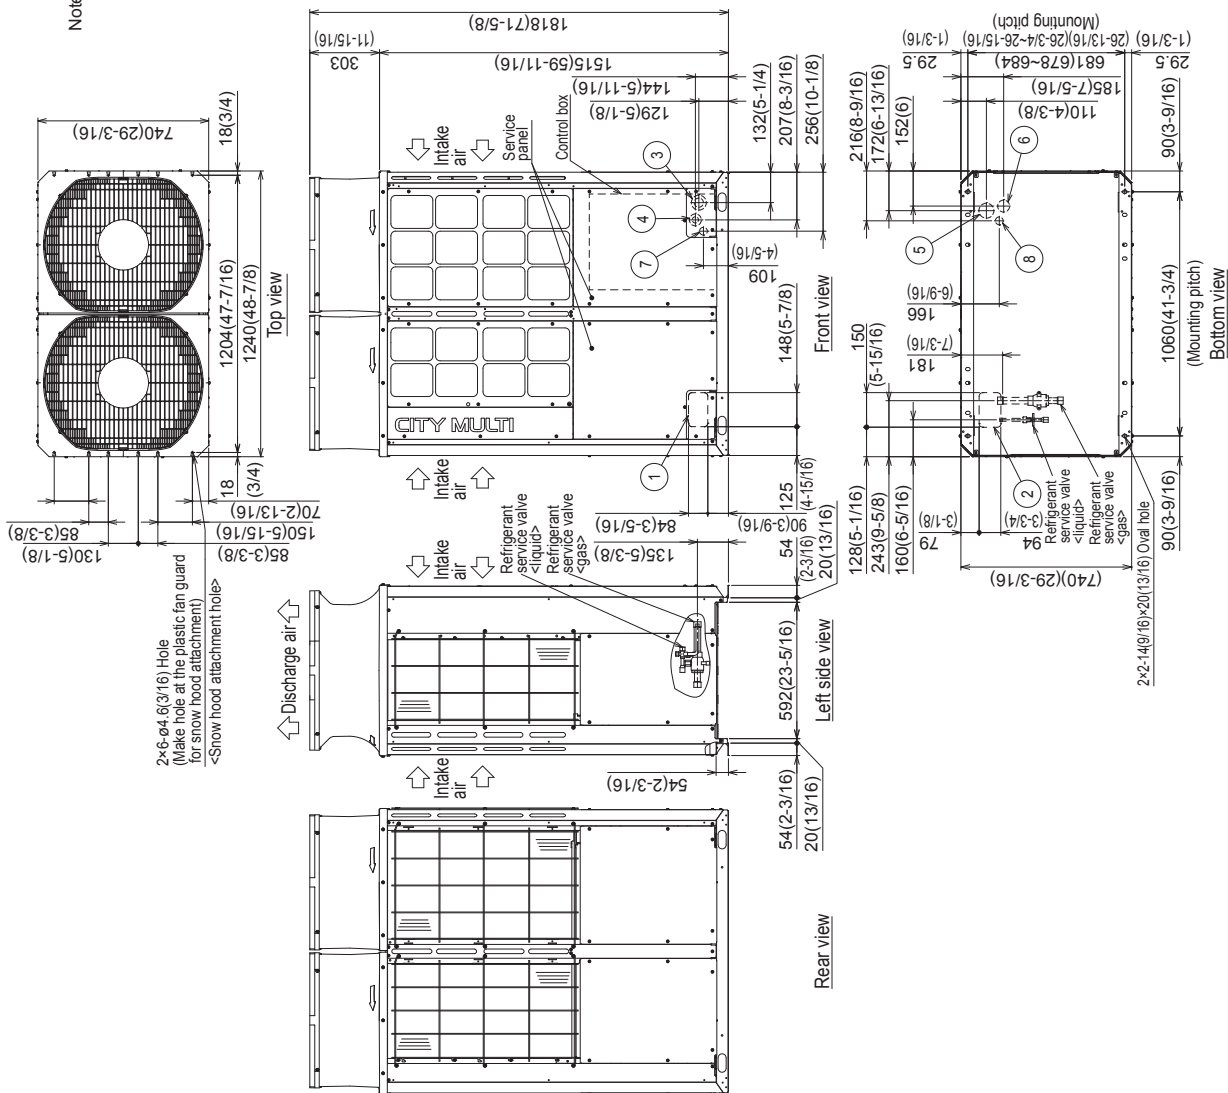

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.