

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PUHY-EP96TNU-A-TH

Seacoast (BS) Model PUHY-EP96TNU-A-TH-BS

Minimum Operating Temperature

Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E) (x1)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

1. Cooling conditions (Test conditions are based on AHRI 1230)

Indoor: 80°F DB, 67°F WB, (26.7°C DB, 19.4°C WB), Outdoor: 95°F DB, (35°C DB)

2. Heating conditions (Test conditions are based on AHRI 1230)

Indoor: 70°F DB, (21.1°C DB), Outdoor: 47°F DB, 43°F WB, (8.3°C DB, 6.1°C WB)

3. Cooling mode/Heating mode

4. External static pressure option is available (0.12 in. WG, 0.24 in. WG, 0.32 in. WG/30 Pa, 60 Pa, 80 Pa).

Outdoor Model				PUHY-EP96TNU-A (-BS)					
Indoor Model				Non-Ducted		Ducted			
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz					
Cooling capacity *1 (Nominal)			BTU/h	96,000					
			kW	28.1					
			Power input	kW	6.12				
			(208-230) Current input	A	18.8-17.0				
(Rated)			BTU/h	92,000					
			kW	27.0					
			Power input	kW	7.36	7.45			
			(208-230) Current input	A	22.6-20.5	22.9-20.7			
Temp. range of cooling			Indoor	W.B.	59~75°F (15~24°C)				
			Outdoor	D.B.	23~126°F (-5~52°C)				
Heating capacity *2 (Nominal)			BTU/h	108,000					
			kW	31.7					
			Power input	kW	7.26				
			(208-230) Current input	A	22.3-20.2				
			(Rated)			BTU/h	103,000		
						kW	30.2		
(208-230)			Power input	kW	6.59	6.79			
			Current input	A	20.3-18.3	20.9-18.9			
			Temp. range of heating			Indoor	D.B.	59~81°F (15~27°C)	
						Outdoor	W.B.	-13~60°F (-25~15.5°C)	
Indoor unit			Total capacity		50~130% of outdoor unit capacity				
connectable			Model/Quantity		P04~P96/1~24				
Sound power level (measured in anechoic room) *3			dB <A>	75.0/77.5					
Refrigerant		Liquid pipe	in. (mm)	3/8 (9.52) Brazed 1/2 (12.7) Brazed, the farthest pipe length >= 90 m)					
piping diameter		Gas pipe	in. (mm)	7/8 (22.2) Brazed					
Minimum Circuit Ampacity (*)			A	44-40					
Maximum Overcurrent Protection (*)			A	70-60					
FAN		Type x Quantity		Propeller fan x 2					
		Airflow rate	cfm	6,700					
			m3/min	190					
		Control, Driving mechanism		Inverter-control, Brushless DC motor					
		Motor output	kW	0.46+0.46					
*4 External static press.		0 in.WG (0 Pa)							
Compressor		Type x Quantity		Inverter scroll hermetic compressor x 1					
		Starting method		Inverter					
		Motor output	kW	5.4 x 1					
		Case heater	kW	-					
		Lubricant		MEL32					
External finish				Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>					
External dimension H x W x D			in.	71-5/8 x 48-7/8 x 29-3/16					
			mm	1,818 x 1,240 x 740					
Protection devices		High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)					
		Inverter circuit (COMP./FAN)		Over-current protection					
		Fan motor		-					
Refrigerant		Type x original charge		R410A x 21 lbs + 9 oz (9.8 kg)					
		Control		LEV and HIC circuit					
Net weight			lbs (kg)	622 (282)					
Heat exchanger				Salt-resistant cross fin & aluminium tube					
HIC circuit (HIC: Heat Inter-Changer)				Copper pipe, tube-in-tube structure					
Defrosting method				Auto-defrost mode (Reversed refrigerant cycle)					
Optional parts				Joint: CMY-Y102SS/102LS-G2 Header: CMY-Y104/108/1010C-G					

Specifications are subject to change without notice.

Unit: mm (in.)

Note 1, Please refer to the next page for information regarding necessary spacing around the unit and foundation work.


2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Service valve
	Liquid	Gas	
EP-96	ø9.52(3/8) Braze (ø12.7(1/2) Braze) ^{1,3}	ø22.2(7/8) Braze ^{1,2}	
EP-120	ø9.52(3/8) Braze (ø12.7(1/2) Braze) ^{1,2,4}		ø12.7(1/2)
EP-144	ø12.7(1/2) Braze	ø28.58(1-1/8) Braze	ø28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.
*2 Indicates dimensions and connection specifications in the case the unit is used in combination with other outdoor units.
*3 Furthest piping length (OU from IU)≥90m
*4 Furthest piping length (OU from IU)≥40m

NO.	Usage	Specifications
①	Front through hole	148(5/7/8) × 84(3/5/16) Knockout hole
②	For pipes	Bottom through hole 150(5/15/16) × 84(3/3/4) Knockout hole
③		Front through hole ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④	For wires	Front through hole ø43.7(1-3/4) or ø22.2(7/8) Knockout hole
⑤		Bottom through hole ø65(2-9/16) Knockout hole
⑥	For transmission cables	Bottom through hole ø52(2-1/16) Knockout hole
⑦		Front through hole ø34(1-3/8) Knockout hole
⑧		Bottom through hole ø24(1-1/8) Knockout hole

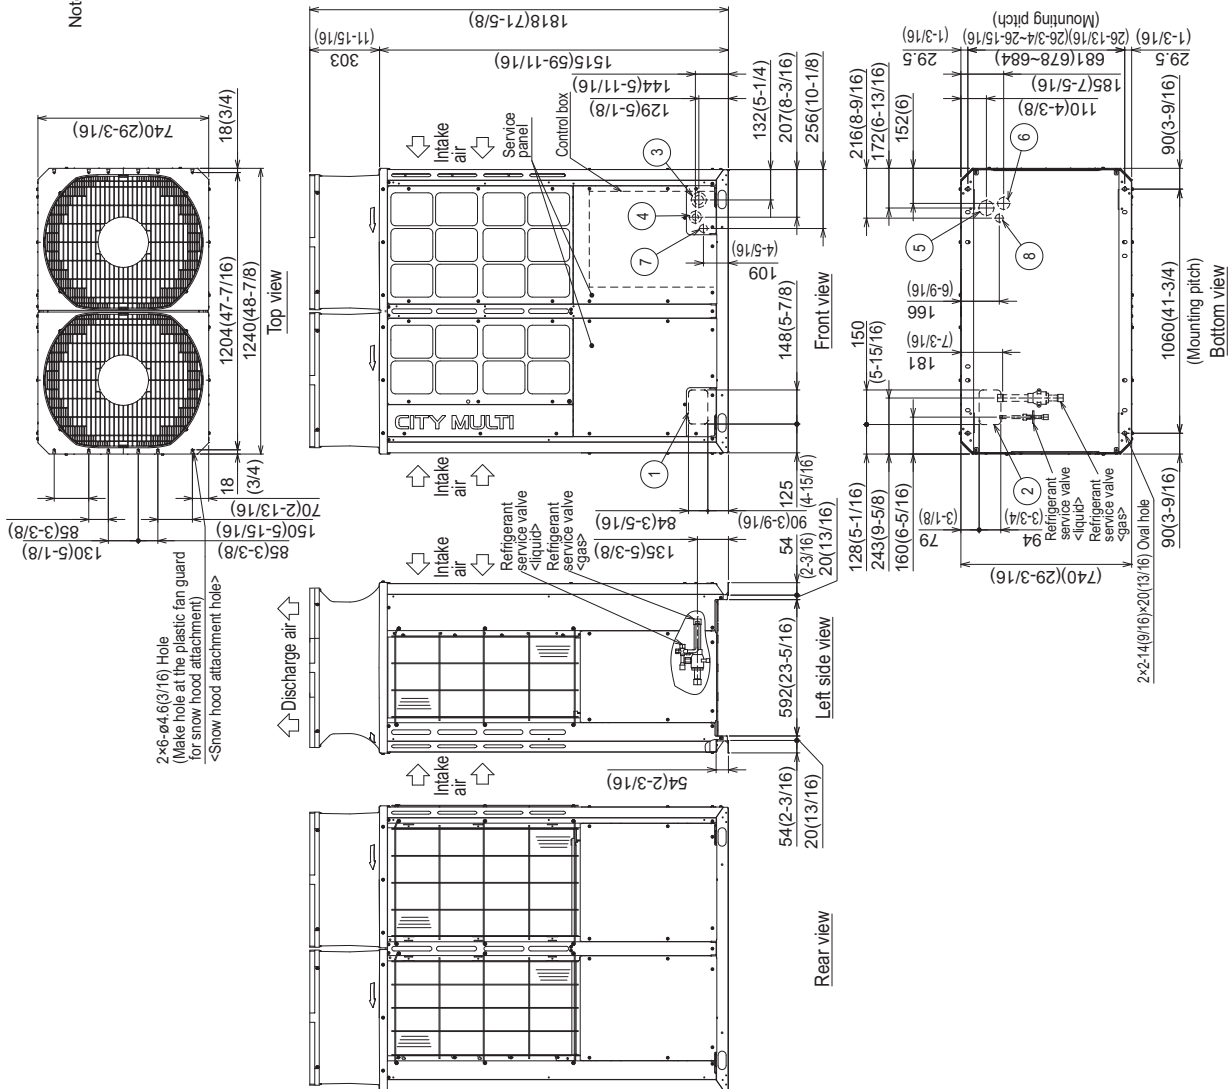

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.