

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PUHY-P192TSNU-A-TH

Seacoast (BS) Model PUHY-P192TSNU-A-TH-BS

*Minimum Operating Temperature**Heating (Outdoor): -25°F (-32°C) WB**Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.***ACCESSORIES**

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E) (x2)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Outdoor Model				PUHY-P192TSNU-A (-BS)				
Indoor Model				Non-Ducted	Ducted			
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz				
Cooling capacity *1 (Nominal)			BTU/h	192,000				
			kW	56.3				
			Power input	14.29				
			(208-230)	Current input	44.0-39.8			
(Rated)			BTU/h	184,000				
			kW	53.9				
			Power input	16.97	16.93			
			(208-230)	Current input	52.3-47.3	52.2-47.2		
Temp. range of cooling		Indoor	W.B.	59~75°F (15~24°C)				
		Outdoor	D.B.	23~126°F (-5~52°C)				
Heating capacity *2 (Nominal)			BTU/h	216,000				
			kW	63.3				
			Power input	15.95				
			(208-230)	Current input	49.1-44.4			
			(Rated)			BTU/h	206,000	
						kW	60.4	
			Power input	14.43	14.83			
			(208-230)	Current input	44.5-40.2	45.7-41.3		
Temp. range of heating *3		Indoor	D.B.	59~81°F (15~27°C)				
		Outdoor	W.B.	-13~60°F (-25~15.5°C)				
Indoor unit connectable		Total capacity		50~130% of outdoor unit capacity				
		Model/Quantity		P04~P96/1~48				
Sound power level (measured in anechoic room) *4			dB <A>	79.0/81.0				
Refrigerant		Liquid pipe	in. (mm)	5/8 (15.88) Brazed				
piping diameter		Gas pipe	in. (mm)	1-1/8 (28.58) Brazed				

Set Model

Model		PUHY-P96TNU-A (-BS)	PUHY-P96TNU-A (-BS)
Minimum Circuit Ampacity (*)	A	40-36	40-36
Maximum Overcurrent Protection (*)	A	60-50	60-50
FAN	Type x Quantity	Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm	6,700
		m3/min	190
	Control, Driving mechanism	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW	0.46+0.46
Compressor	*5 External static press.	0 in.WG (0 Pa)	0 in.WG (0 Pa)
	Type x Quantity	Inverter scroll hermetic compressor x1	Inverter scroll hermetic compressor x1
	Starting method	Inverter	Inverter
	Motor output	kW	5.5 x 1
	Case heater	kW	-
Lubricant		MEL32	MEL32
External finish		Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>
External dimension H x W x D		in.	71-5/8 x 48-7/8 x 29-3/16
		mm	1,818 x 1,240 x 740
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)	Over-current protection	Over-current protection
	Fan motor	-	-
Refrigerant	Type x original charge	R410A x 21 lbs + 9 oz (9.8 kg)	R410A x 21 lbs + 9 oz (9.8 kg)
	Control	LEV and HIC circuit	LEV and HIC circuit
Net weight	lbs (kg)	580 (263)	580 (263)
Heat exchanger		Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure	Copper pipe, tube-in-tube structure
Pipe between unit and distributor	Liquid pipe	in. (mm)	3/8 (9.52) Braze
	Gas pipe	in. (mm)	7/8 (22.2) Braze
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle)	
Optional parts		Outdoor Twinning kit: CMY-Y100CBK3 Joint: CMY-Y102SS/102LS-G2, CMY-Y202S/302S-G2 Header: CMY-Y104/108/1010C-G	

Notes:

1. Nominal cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
2. Nominal heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
3. When applying product below -4°F, consult your design engineer for cold climate application best practices, including the use of a backup source for heating.
4. Cooling mode/Heating mode
5. External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).


* Due to continuing improvement, above specifications may be subject to change without notice.

Specifications are subject to change without notice.

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PUHY-P192TSNU-A-TH(-BS) - DIMENSIONS

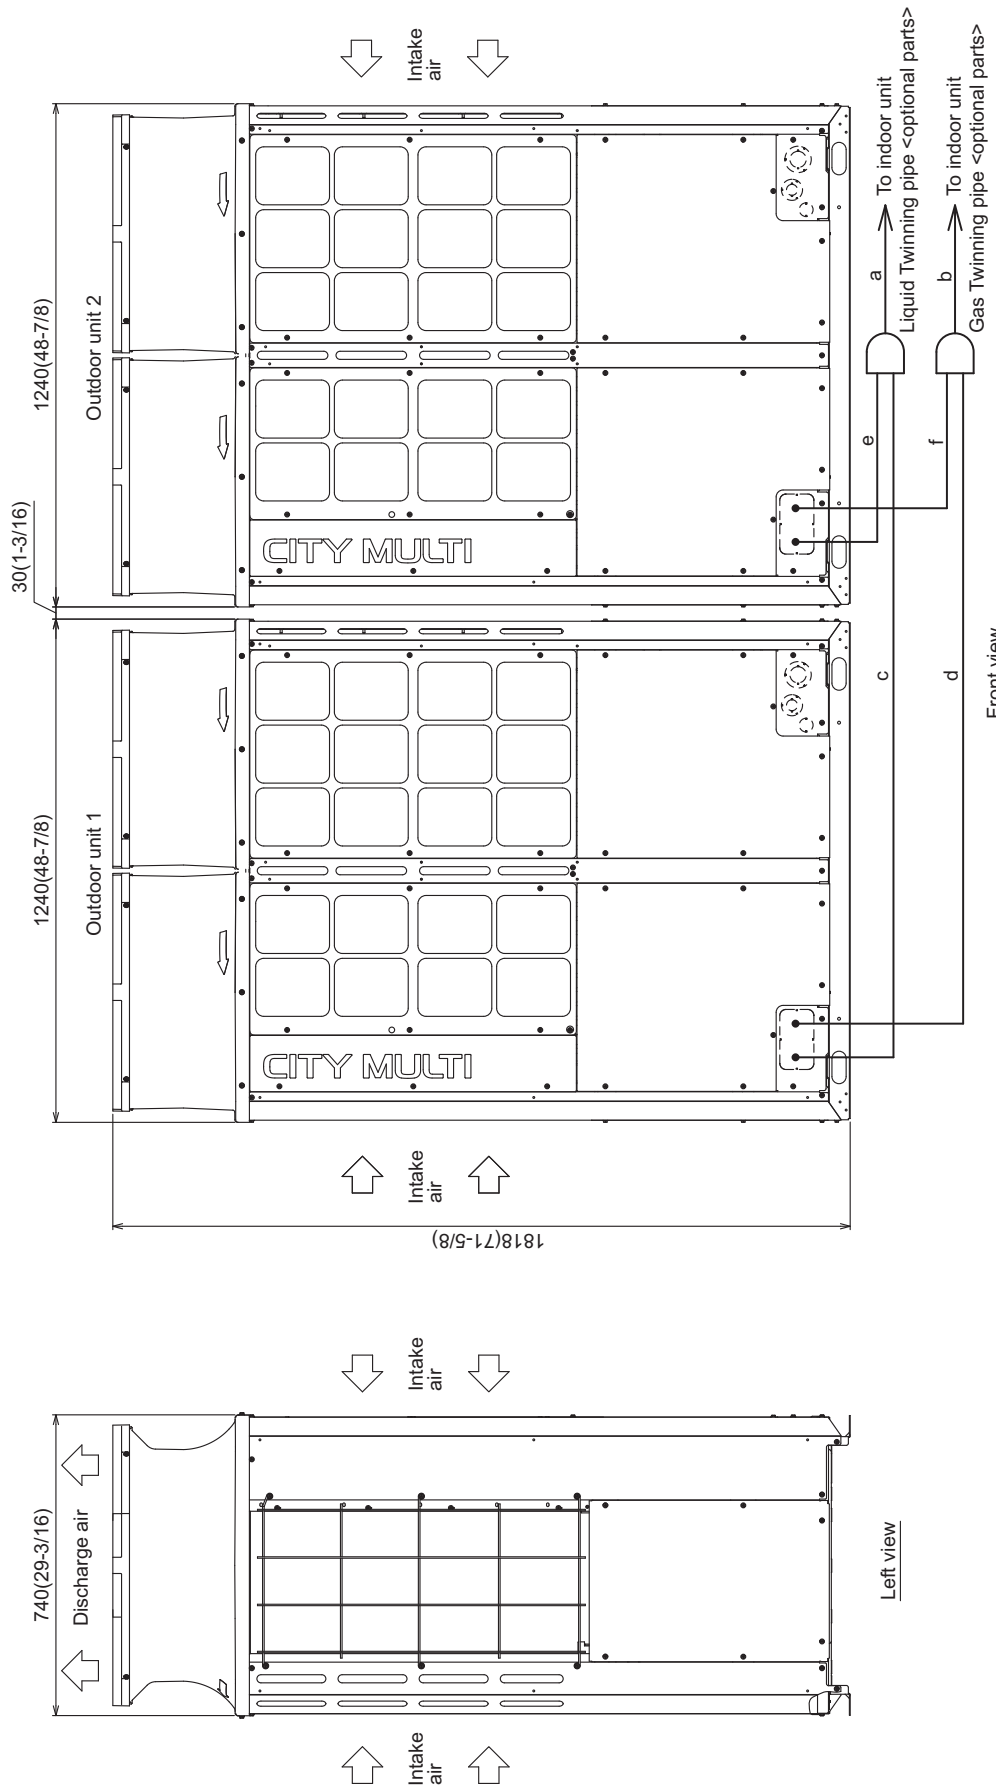

Front view

Left view

Twinning pipe connection size

Package unit name	PUHY-P192TSNU-A(-BS)	PUHY-P216TSNU-A(-BS)	PUHY-P240TSNU-A(-BS)
Component unit name	Outdoor unit 1 PUHY-P96TSNU-A(-BS)	Outdoor unit 2 PUHY-P96TSNU-A(-BS)	Indoor unit PUHY-P120TSNU-A(-BS)
Outdoor Twinning Kit(optional parts)	CMY-Y100CBK3		
Indoor unit ~Twinning pipe	Liquid a	Gas b	
	15.88(5/8)	ø28.58(1-1/8)	

Twinning pipe-Outdoor unit	Unit model	Liquid c or e	Gas d or f
P96	ø9.52(3/8)	ø22.2(7/8)	
P120	ø12.7(1/2)	ø28.58(1-1/8)	


- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
 2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.
 Be sure to see the Installation Manual for details of Twinning pipe installation.
 3. The pipe section before the Twinning pipe (section "a" and "b" in the figure) must have at least 500mm(19-11/16) of straight section (*including the straight pipe that is supplied with the Twinning pipe).
 4. Only use the Twinning pipe by Mitsubishi (optional parts).

Unit: mm (in.)

Module: PUHY-P96TSNU-A-TH(-BS) - DIMENSIONS

Unit: mm (in.)

Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

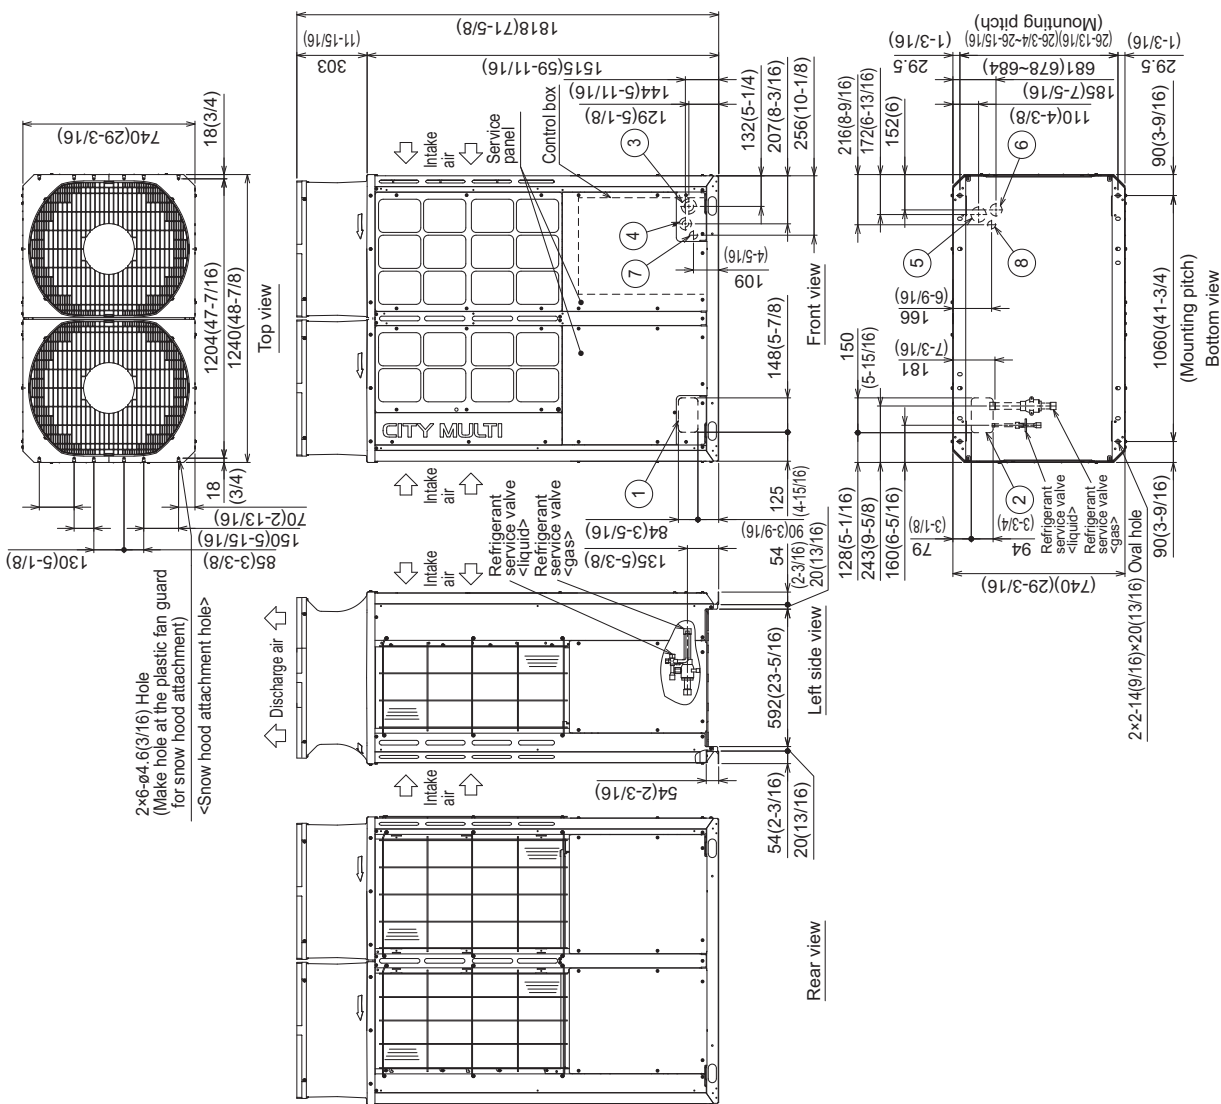

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	Liquid	Gas	Service valve	Gas
P96	ø9.52(3/8) Brazed (ø12.7(1/2) Brazed)*1,3	ø22.7(1/8) Brazed*1,2	ø12.7(1/2)	ø28.58(1-1/8)
P120	ø9.52(3/8) Brazed (ø12.7(1/2) Brazed)*1,2,4	ø22.7(1/8) Brazed*1,2	ø12.7(1/2)	ø28.58(1-1/8)
P144	ø12.7(1/2) Brazed	ø28.58(1-1/8) Brazed	ø12.7(1/2)	ø28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.

*2 Indicates dimensions and connection specifications in the case the unit is used in combination with other outdoor units.

*3 Furthest piping length (OU from IU)≥90m

*4 Furthest piping length (OU from IU)≥40m

NO.	Usage	Specifications	
		For pipes	For wires
①	Front through hole	148(5-7/8) x 84(3-5/16) Knockout hole	
②	Bottom through hole	150(5-15/16) x 94(3-3/4) Knockout hole	
③	Front through hole	ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole	
④	Front through hole	ø43.7(1-3/4) or ø22.2(7/8) Knockout hole	
⑤	Bottom through hole	ø65(2-9/16) Knockout hole	
⑥	Bottom through hole	ø52(2-1/16) Knockout hole	
⑦	Front through hole	ø34(1-3/8) Knockout hole	
⑧	Bottom through hole	ø34(1-3/8) Knockout hole	

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.