

Submittal Data: PUMY-P48NKMU4

Air Source Heat Pump System

Job Name:	Location:		
Purchaser:	Submitted By:		
Submitted To:	Reference:	Approval:	Construction:
Engineer:	Date:	Application:	



Images provided for reference purposes only

- Single-phase Outdoor unit with variable refrigerant flow (VRF) zoning technology
- Inverter-driven variable speed compressor
- Uses CITY MULTI indoor units and Control Network
- Compatible with M&P series Indoor Units with Branch Box
- Optional base pan heater (Part # listed below)
- Low ambient cooling down to -40 C. available as an option ^{7,8}

Performance:

Power supply				1-phase 208/230 V, 60 Hz		
Indoor type				Non-Ducted	Mixed	Ducted
Cooling	Capacity Rated ¹		Btu/h	48,000	48,000	48,000
	Rated power consumption ¹		W	3,665	4,070	4,575
	Current input (208/230V)		A	17.9/16.2	19.9/18.0	22.3/20.2
Heating	Capacity Rated 47°F ¹		Btu/h	50,000	50,000	50,000
	Capacity Max. 17°F ²		Btu/h	43,000	43,000	43,000
	Capacity Max. 5°F		Btu/h	35,400	35,400	35,400
	Rated power consumption 47°F ¹		W	3,665	4,070	4,580
	Current input (208/230V)		A	17.9/16.2	19.9/18.0	22.4/20.2
Breaker Size				30 A - When power is supplied separately 40 A - When power is supplied from the outdoor unit		
Minimum wire size				5.3(10AWG) - When power is supplied separately 8.4(8AWG) - When power is supplied from the outdoor unit		
Indoor unit connectable		Total capacity		50 to 130% of outdoor unit capacity		
		Model/Quantity ³		CITY MULTI Branch box		
Sound pressure level (measured in anechoic room)			dB <A>		51/54	
Refrigerant piping diameter		Liquid pipe		inch (mm)		
		Gas pipe		inch (mm)		
Fan	Type × Quantity		Propeller fan × 2			
	Airflow rate		m ³ /min		110	
			cfm		3,885	
	Control, Driving mechanism		DC control			
Motor output			kW		0.074 × 2	
Compressor	Type × Quantity		Scroll hermetic compressor x 1			
	Manufacture		Mitsubishi Electric Corporation			
	Starting method		Inverter			
	Motor output		kW		3.4	
	Lubricant		FV50S 78oz. (2.3L)			
External finish				Galvanized Steel Sheet <Munsell 3Y 7.8/ 1.1>		
External dimension HxWxD			mm		1,338 × 1,050 × 330 (+25)	
			inch		52-11/16 × 41-11/32 × 13 (+1)	
Protection devices	High pressure protection		High pressure switch			
	Inverter circuit (COMP./FAN)		Overcurrent detection, Overheat detection (Heat sink thermistor)			
	Compressor protection		Compressor thermo, Overcurrent detection			
	Fan motor protection		Overheating/Voltage protection			
Refrigerant	Type × original charge		R410A 10 lbs. 9 oz. (4.8kg)			
	Control		Linear Expansion Valve			
Net weight			lb (kg)		271 (123)	
Heat exchanger				Cross fin and tube		
HIC circuit (HIC: Heat Inter-Changer)				HIC circuit		
Operating Temperature Range			Cooling		D.B 23 to 115°F [D.B.-5 to 46°C] ^{4, 5, 6}	
			Heating		D.B.-13 to 70°F [D.B. -25 to 21°C]	
PUMY-P48NKMU4			Non-ducted	Ducted (Mid-static)	Mixed (Mid-static)	Ducted (High-static)
Efficiency Non-ducted / Mixed (Mid-static) / Ducted (Mid-static) / Mix (High static) / Ducted (High static)		EER2	13.1	10.5	11.8	10.4
		SEER2	23	16	19.5	14.7
		HSPF (Region IV)	10.4	8.9	9.65	8.3
		HSPF (Region V)	8.35	7.7	8	7.5

NOTES:

1 Rating conditions Cooling Indoor : D.B. 80°F/W.B. 67 °F [D.B.26.7°C/W.B. 19.4°C]

Outdoor : D.B. 95°F [D.B. 35.0°C]

Heating Indoor : D.B. 70°F [D.B. 21.1°C]

Outdoor : D.B. 47°F/W.B. 43°F [D.B. 8.3°C/W.B. 6.1°C]

2 Conditions Heating Indoor : D.B. 70°F [D.B. 21.1°C]

Outdoor : D.B. 17°F/W.B. 15°F [D.B. -8.3°C/W.B. -9.4°C]

3 It cannot be connected mixed CITY MULTI indoor unit and branch box indoor unit.

4 D.B. 5 to 115°F [D.B. -15 to 46°C], when an optional Air Outlet Guide is installed.

However, this condition does not apply to the indoor units listed in #5.

5 50 to 115°F (10 to 46°C) D.B.: When connecting PKFY-P04/06/08/12NLMU, PFFY-P06/08/12NEMU, and PFFY-P06/08/12NRMU type indoor unit.

6 When the temperature is below D.B. 50°F [D.B. 10°C] with branch box system, noise could potentially occur.

7 For - 40°C cooling ONLY operation a low ambient kit is required along with a front wind deflector. Heating operation is not permitted.

8 For Low-Ambient Cooling operation, dip switch SW 3 #1 must be switched to the ON position in the indoor unit to disable heating mode.

Note: Refer to the indoor unit's service manual for the indoor units specification.

Submittal Data: PUMY-P48NKMU4

Piping

Liquid Pipe Size O.D. (Flared)	In. [mm]	3/8 [9.52]
Gas Pipe Size O.D. (Flared)	In. [mm]	5/8 [15.88]
Total Piping Length when using Branch Box	Ft. [m]	492 [150]
Total Piping Length without Branch Box	Ft. [m]	984 [300]
Maximum Height Difference ^A , ODU above IDU	Ft. [m]	164 [50]
Maximum Height Difference ^A , ODU below IDU	Ft. [m]	131 [40]
Maximum Height Difference ^A , between branch boxes	Ft. [m]	49 [15]
Maximum Height Difference between IDU and IDU without branch box	Ft. [m]	49 [15]
Maximum Piping Length between ODU and Branch Box	Ft. [m]	180 [55]
Farthest Piping Length from ODU to IDU with Branch Box	Ft. [m]	262 [80]
Farthest Piping Length from ODU to IDU without Branch Box	Ft. [m]	492 [150]
Farthest Piping Length after Branch Box	Ft. [m]	82 [25]
Total Piping Length between Branch Boxes and IDU	Ft. [m]	311 [95]
Maximum Number of Bends for IDU	Ft. [m]	15

^AA Branch box should be placed within the level between the outdoor unit and indoor units.

The outdoor unit is lower: 131ft [40m] or less (98ft [30.] or less if PKFY-P04/06/08/12NLMU, PFFY-P06/08/12NEMU, and PFFY-P06/08/12NRMU are included.)

Optional Accessories	Description	Model No.
Branch Box	3 Port Branch Box	PAC-MKA32BC
	3 Port Branch Box	PAC-MKA33BC
	5 Port Branch Box	PAC-MKA52BC
	5 Port Branch Box	PAC-MKA53BC
Branch Joint	T-Branch	CMY-Y62-G-E
Header	4 Branch	CMY-Y64-G-E
	8 Branch	CMY-Y68-G-E
Centralized Drain Pan	Central Drain Pan	PAC-SH97DP-E
Control/Service Tool	Maintenance Tool Interface	PAC-USCMS-MN-1
Distribution pipe	Brazed Connection	MSDD-50BR-E
	Flare Connection	MSDD-50AR-E
Drain Socket	Drain Socket	PAC-SG60DS-E
Optional Defrost Heater	Optional Defrost Heater	PAC-SJ20BH-E
Port Adapter	Adaptor: 1/2" x 3/8"	MAC-A455JP-E
	Adaptor: 1/2" x 5/8"	MAC-A456JP-E
	Adaptor: 3/8" x 1/2"	MAC-A454JP-E
	Adaptor: 3/8" x 5/8"	PAC-SG76RJ-E
Snow/Wind Guard	Front	CM-S-FR-NKMU (two pieces are required)
Snow/Wind Guard	Rear	SG-1-RE
Snow/Wind Guard	Side	SG-1-SD
Snow/Wind Guard	Blocker	CM-S-BLK-NKMU

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s).

Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.


"Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases"

All electrical work shall comply with National (CEC) and local codes and regulations.

Notes:

Outdoor Unit Outline and Dimensions:

Unit: mm(m)

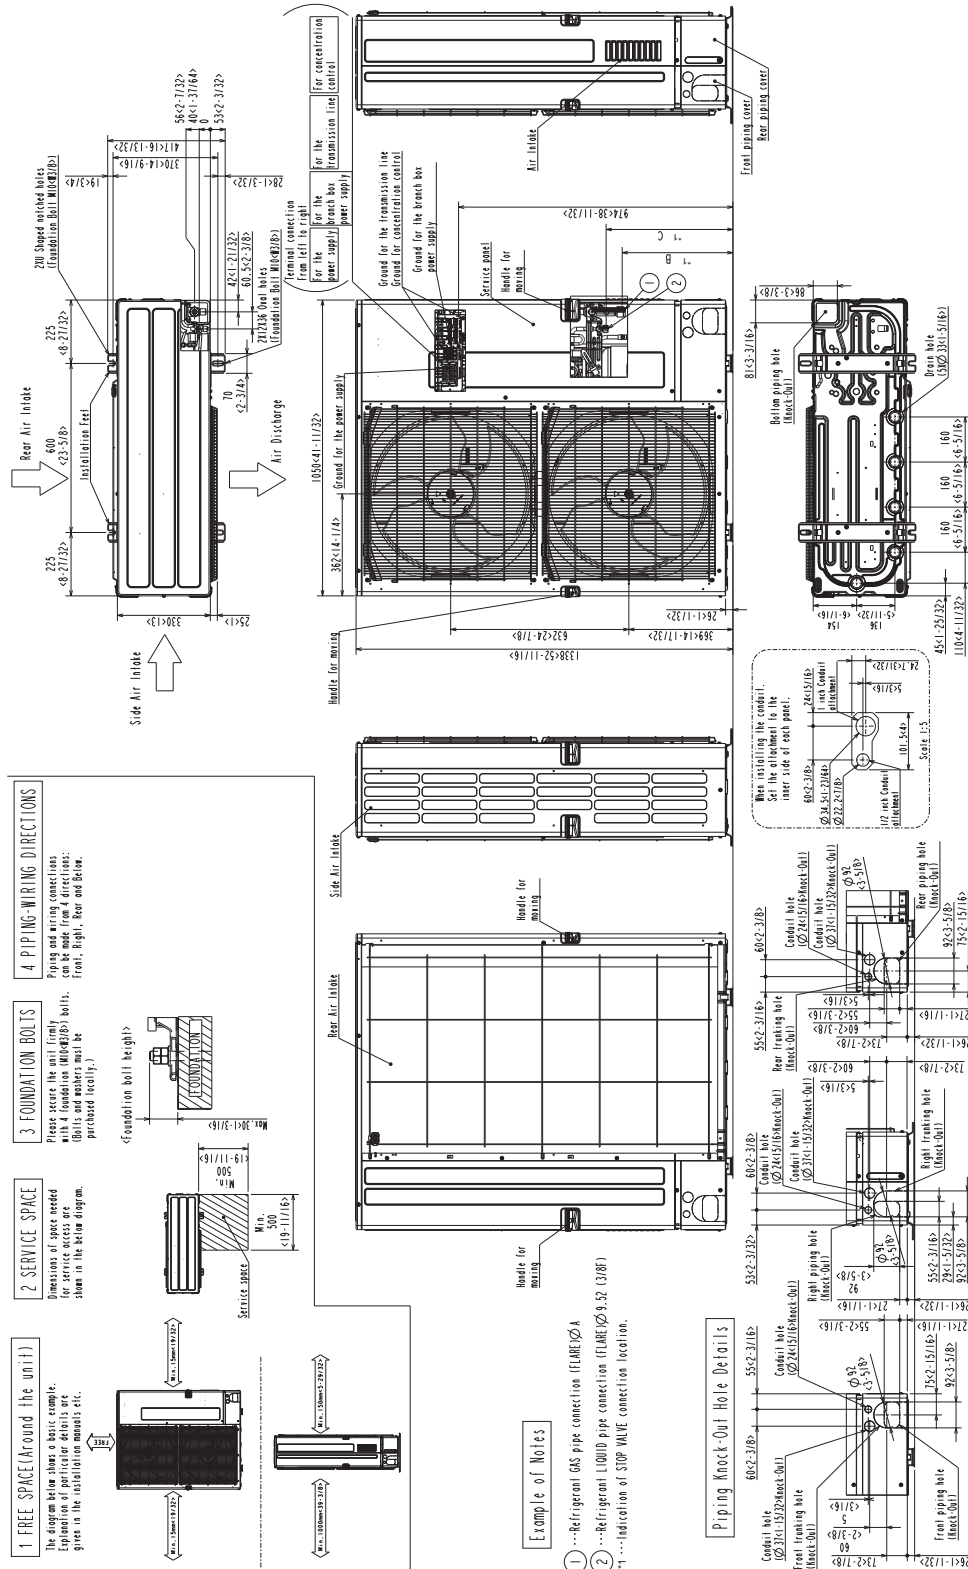

PUMY - HP36NKMU2	15.88 (5/8F)	426 < 16-25/32 >	485 < 19-3/32 >
PUMY - HP42NKMU2			
PUMY - HP48NKMU2	19.05 (3/4F)	393 < 15-15/32 >	450 < 17-23/32 >
PUMY - P60NKMU4			
PUMY - P36NKMU4	15.88 (5/8F)	426 < 16-25/32 >	485 < 19-3/32 >
PUMY - P48NKMU4			
MODELS	A	B	C