

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PURY-EP264TSNU-A

Seacoast (BS) Model PURY-EP264TSNU-A-BS

Minimum Operating Temperature

Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

System requires firmware Ver. 26.35 or later.

ACCESSORIES

Snow/Wind Guards - (See separate submittal)

Panel Heater - (PAC-PH02EHYU-E1) (x2)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

1. Nominal cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
2. Nominal heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
3. Cooling mode/Heating mode
4. The sound pressure level measured by the conventional method in JIS for reference purpose.
5. External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/30 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

Outdoor Model		PURY-EP264TSNU-A (-BS)	
Indoor Model		Non-Ducted	Ducted
Power source		3-phase 3-wire 208-230 V ±10% 60 Hz	
Cooling capacity *1 (Nominal)		BTU/h	264,000
		kW	77.4
	(208-230)	Power input	21.86
		Current input	67.4-60.9
	(Rated)	BTU/h	252,000
		kW	73.9
	(208-230)	Power input	25.30
		Current input	78.0-70.5
	(208-230)	Power input	25.43
		Current input	78.4-70.9
Temp. range of cooling	Indoor	W.B.	59-75°F (15-24°C)
	Outdoor	D.B.	23-126°F (-5-52°C)
Heating capacity *2 (Nominal)		BTU/h	295,000
		kW	86.5
	(208-230)	Power input	24.56
		Current input	75.7-68.5
	(Rated)	BTU/h	280,000
		kW	82.1
	(208-230)	Power input	22.65
		Current input	69.8-63.1
	(208-230)	Power input	22.30
		Current input	68.7-62.1
Temp. range of heating	Indoor	D.B.	59-81°F (15-27°C)
	Outdoor	W.B.	-13-60°F (-25-15.5°C)
Indoor unit connectable	Total capacity	50-150% of outdoor unit capacity	
	Model/Quantity	P04-P96/2-50	
Sound power level (measured in anechoic room) *3		dB <A>	87.0/87.0
Refrigerant piping diameter	High pressure	in. (mm)	1-1/8 (28.58) Braze
	Low pressure	in. (mm)	1-3/8 (34.93) Braze


Set Model

Model		PURY-EP144TNU-A (-BS)	PURY-EP120TNU-A (-BS)
Minimum Circuit Ampacity (*)		60-80	56-55
Maximum Overcurrent Protection (*)		100-100	90-90
FAN	Type x Quantity	Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm	8,300
		m³/min	235
	Control, Driving mechanism	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW	0.46±0.46
	External static press.	0 in.WG (0 Pa)	0 in.WG (0 Pa)
	*4		
Compressor	Type x Quantity	Inverter scroll hermetic compressor x 1	Inverter scroll hermetic compressor x 1
	Starting method	Inverter	Inverter
	Motor output	kW	7.6
	Case heater	kW	-
	Lubricant	MEL32	MEL32
External finish		Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>
External dimension H x W x D		in. 71-5/8 x 48-7/8 x 29-3/16 mm 1,818 x 1,240 x 740	in. 71-5/8 x 48-7/8 x 29-3/16 mm 1,818 x 1,240 x 740
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)	Over-current protection	Over-current protection
	Fan motor	-	-
Refrigerant	Type x original charge	R410A x 23 lbs + 12 oz (10.8 kg)	R410A x 17 lbs + 10 oz (8.0 kg)
	Control	Indoor LEV and BC controller	Indoor LEV and BC controller
Net weight		lbs (kg) 680 (308)	622 (282)
Heat exchanger		Salt-resistant cross fin & aluminium tube	Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)		-	-
Pipe between unit and distributor	High pressure	in. (mm) 7/8 (22.2) Braze	3/4 (19.05) Braze
	Low pressure	in. (mm) 1-1/8 (28.58) Braze	1-1/8 (28.58) Braze
Optional parts		Outdoor Twinning kit: CMY-R300NCBK Joint: CMY-Y102SS-G2, CMY-Y102LS-G2, CMY-Y202S-G2, CMY-R160-J1, CMY-R201, 202, 203, 204, 205, 306S-G, CMY-R302, 303, 304, 305S-G1 Main BC controller: CMB-P108, 1012, 1016NU-JA1, CMB-P1016NU-KA1 Sub BC controller: CMB-P104, 108NU-KB1	

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-EP264TSNU-A(-BS) - DIMENSIONS

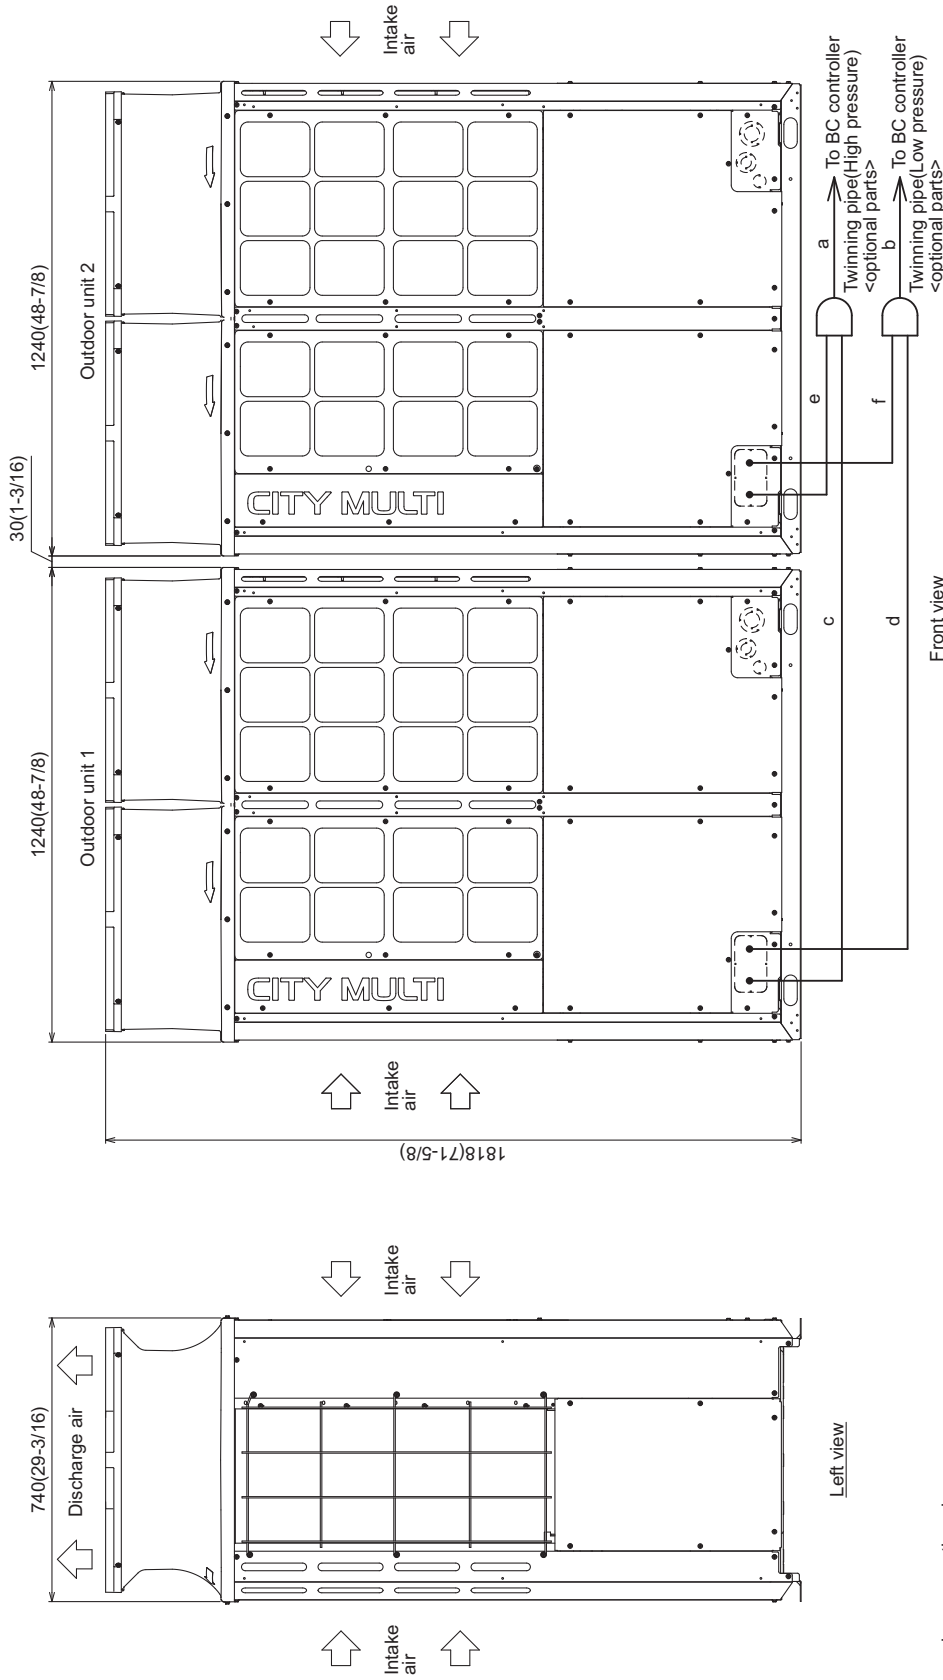

Twinning pipe connection size

Package unit name	PURY-EP102TSNU-A(-BS)	PURY-EP126TSNU-A(-BS)	PURY-EP144TSNU-A(-BS)	PURY-EP162TSNU-A(-BS)	PURY-EP180TSNU-A(-BS)	PURY-EP200TSNU-A(-BS)	PURY-EP220TSNU-A(-BS)	PURY-EP240TSNU-A(-BS)	PURY-EP264TSNU-A(-BS)	PURY-EP280TSNU-A(-BS)	PURY-EP300TSNU-A(-BS)
Component unit name	Outdoor unit 1	Outdoor unit 2	Outdoor unit 1	Outdoor unit 2	Outdoor unit 1	Outdoor unit 2	Outdoor unit 1	Outdoor unit 2	Outdoor unit 1	Outdoor unit 2	Outdoor unit 1
Outdoor Twinning Kit (optional parts)	PURY-EP102TSNU-A(-BS)	PURY-EP126TSNU-A(-BS)	PURY-EP144TSNU-A(-BS)	PURY-EP162TSNU-A(-BS)	PURY-EP180TSNU-A(-BS)	PURY-EP200TSNU-A(-BS)	PURY-EP220TSNU-A(-BS)	PURY-EP240TSNU-A(-BS)	PURY-EP264TSNU-A(-BS)	PURY-EP280TSNU-A(-BS)	PURY-EP300TSNU-A(-BS)
BC controller	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK	CMY-R200NCBK
~Twinning pipe	High pressure a	High pressure b	High pressure a	High pressure b	High pressure a	High pressure b	High pressure a	High pressure b	High pressure a	High pressure b	High pressure a
	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)	ø22.2(7/8)
	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)	ø28.58(1-1/8)
	ø34.93(1-3/8)										

* When the piping length is 65m(213ft) or longer, use the ø28.58(1-1/8) pipe for the part that exceeds 65m(213ft).

Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.

2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.

Be sure to see the Installation Manual for details of Twinning pipe installation.

3. The pipe section before the Twinning pipe (section "a" and "b" in the figure) must have at least 500mm(19-11/16) of straight section.

(*including the straight pipe that is supplied with the Twinning pipe).

4. Only use the Twinning pipe by Mitsubishi (optional parts).

Front view

Left view

Unit model	High pressure c or e	Low pressure d or f
EP96	ø19.05(3/4)	ø22.2(7/8)
EP120	ø19.05(3/4)	ø28.58(1-1/8)
EP144	ø22.2(7/8)	ø28.58(1-1/8)

Twinning pipe-Outdoor unit

Unit: mm (in.)

Unit: mm (in.)


Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.

2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C (248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	High pressure	Low pressure	High pressure	Service valve
EP96		ø 27 (2 1/8) Brazed *1		
EP 120	ø 19 (3/4) Brazed *1	ø 22 (7/8) Brazed *1	ø 28 (1 1/8)	
EP 144	ø 27 (7/8) Brazed *1	ø 28 (1 1/8) Brazed	ø 28 (1 1/8)	

***1** Connect the refrigerant pipe to the service valve according to the Installation Manual.

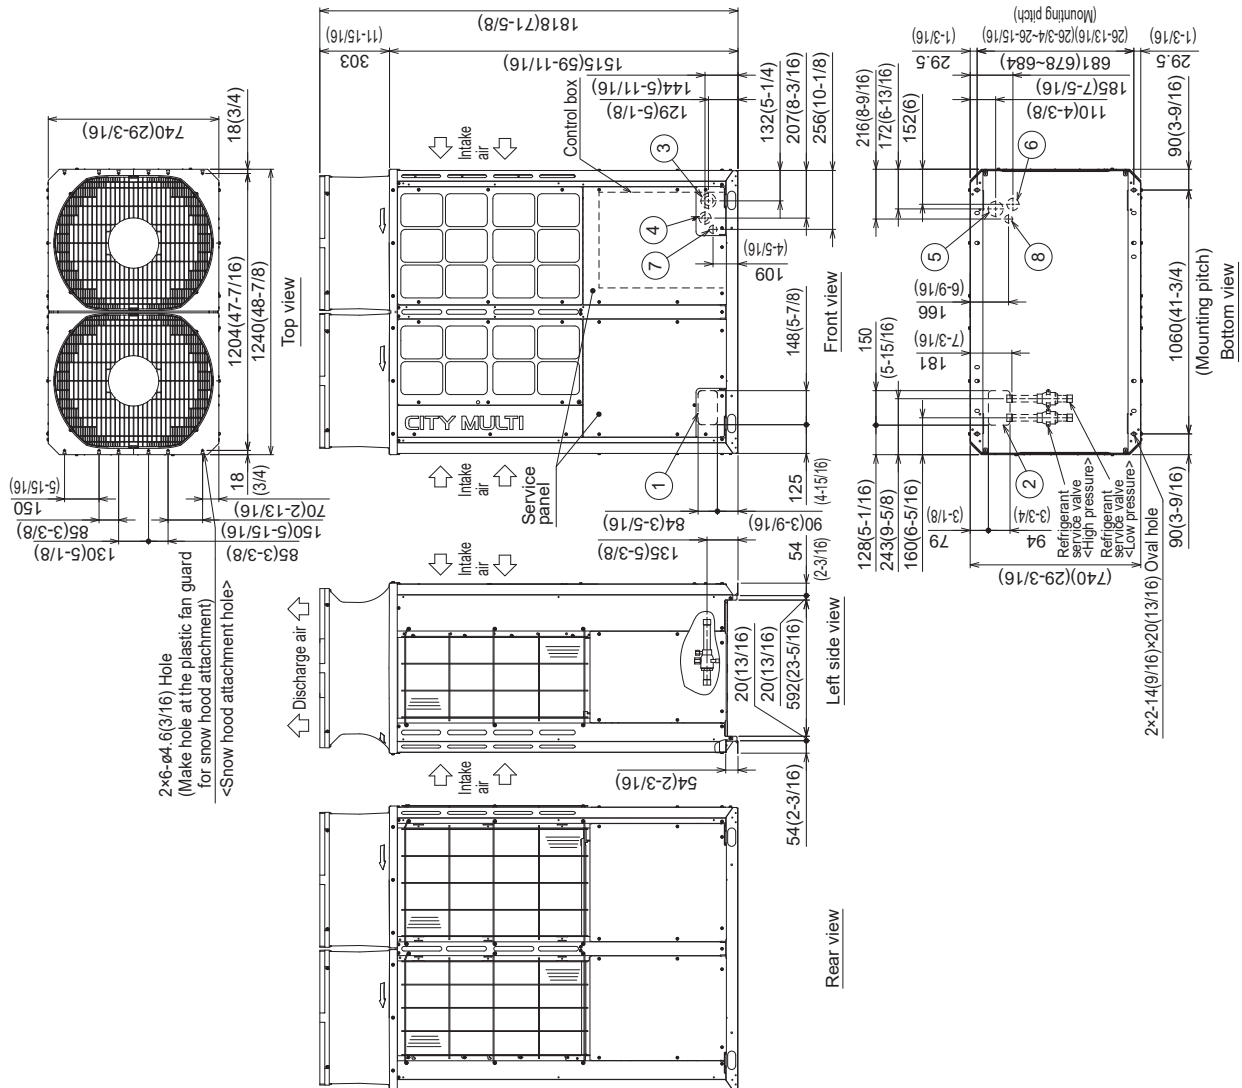

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.