

Job Name:

Schedule Reference:

Date:

**UNIT OPTION**

Standard Model PURY-EP384TSNU-A

Seacoast (BS) Model PURY-EP384TSNU-A-BS

Minimum Operating Temperature

Heating (Outdoor): -25°F (-32°C) WB

Below -22°F (-30°C) WB, an auxiliary heating source is highly recommended.

System requires firmware Ver. 26.35 or later.

ACCESSORIES

Snow/Wind Guards - (See CM_PAB_100_20_006)

Panel Heater - (PAC-PH03EHYU-E1) (x2)

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved Snow Guard / Wind Deflectors / Windscreens and accessories for proper functioning of the unit(s). Use of non-MESCA supported Snow Guard / Wind Deflectors / Windscreens and accessories will affect warranty coverage.

Notes:

1. Nominal cooling conditions (Test conditions are based on AHRI 1230)
Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
2. Nominal heating conditions (Test conditions are based on AHRI 1230)
Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)
3. Cooling mode/Heating mode
4. The sound pressure level measured by the conventional method in JIS for reference purpose.
5. External static pressure option is available (0.12 in.WG, 0.24 in.WG, 0.32 in.WG/80 Pa, 60 Pa, 80 Pa).

Specifications are subject to change without notice.

Outdoor Model				PURY-EP384TSNU-A (-BS)					
Indoor Model				Non-Ducted		Ducted			
Power source				3-phase 3-wire 208-230 V ±10% 60 Hz					
Cooling capacity *1 (Nominal)			BTU/h	384,000					
			kW	112.5					
			Power input	kW	36.62				
			(208-230) Current input	A	112.9-102.1				
			(Rated)	BTU/h	364,000				
(208-230)			kW	106.7					
			Power input	kW	39.05		38.27		
			Current input	A	120.4-108.9		118.0-106.7		
			Temp. range of cooling	Indoor	W.B.	59~75°F (15~24°C)			
			Outdoor	D.B.	23~126°F (-5~52°C)				
Heating capacity *2 (Nominal)			BTU/h	430,000					
			kW	126					
			Power input	kW	38.66				
			(208-230) Current input	A	119.2-107.8				
			(Rated)	BTU/h	410,000				
(208-230)			kW	120.2					
			Power input	kW	36.47		34.75		
			Current input	A	112.4-101.7		107.1-96.9		
			Temp. range of heating	Indoor	D.B.	59~81°F (15~27°C)			
			Outdoor	W.B.	-13~60°F (-25~15.5°C)				
Indoor unit connectable			Total capacity		50~150% of outdoor unit capacity				
			Model/Quantity		P04~P96/2~50				
Sound power level (measured in anechoic room) *3			dB <A>	86.5/89.0					
Refrigerant piping diameter			High pressure	in. (mm)	1-1/8 (28.58) Brazed				
			Low pressure	in. (mm)	1-5/8 (41.28) Brazed				


Set Model

Model		PURY-EP192TNU-A(-BS)	PURY-EP192TNU-A(-BS)
Minimum Circuit Ampacity (*)	A	80-75	80-75
Maximum Overcurrent Protection (*)	A	125-125	125-125
FAN	Type x Quantity	Propeller fan x 2	Propeller fan x 2
	Airflow rate	cfm	13,050
		m³/min	370
	Control, Driving mechanism	Inverter-control, Brushless DC motor	Inverter-control, Brushless DC motor
	Motor output	kW	0.92+0.92
	*5 External static press.	0 in.WG (0 Pa)	0 in.WG (0 Pa)
Compressor	Type x Quantity	Inverter scroll hermetic compressor x 1	Inverter scroll hermetic compressor x 1
	Starting method	Inverter	Inverter
	Motor output	kW	13.2
	Case heater	kW	-
	Lubricant	MEL32	MEL32
External finish		Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>	Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>
External dimension H x W x D		in. 71-5/8 x 68-15/16 x 29-3/16 mm 1,818 x 1,750 x 740	in. 71-5/8 x 68-15/16 x 29-3/16 mm 1,818 x 1,750 x 740
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)	Over-current protection	Over-current protection
	Fan motor	-	-
Refrigerant	Type x original charge	R410A x 26 lbs + 1 oz (11.8 kg)	R410A x 26 lbs + 1 oz (11.8 kg)
	Control	Indoor LEV and BC controller	Indoor LEV and BC controller
Net weight	lbs (kg)	887 (402)	887 (402)
Heat exchanger		Salt-resistant cross fin & aluminium tube	Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)		-	-
Pipe between unit and distributor	High pressure	in. (mm) 7/8 (22.2) Brazed	7/8 (22.2) Brazed
	Low pressure	in. (mm) 1-1/8 (28.58) Brazed	1-1/8 (28.58) Brazed
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle)	
Optional parts		Outdoor Twinning kit: CMY-R300NCBK Joint: CMY-Y102SS-G2, CMY-Y102LS-G2, CMY-Y202S-G2, CMY-R160-J1, CMY-R201, 202, 203, 204, 205, 306S-G, CMY-R302, 303, 304, 305S-G1 Main BC controller: CMB-P1016NU-KA1 Sub BC controller: CMB-P104, 108NU-KB1	

* All electrical work shall comply with National (CEC) and local codes and regulations.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-EP384TSNU-A(-BS) - DIMENSIONS

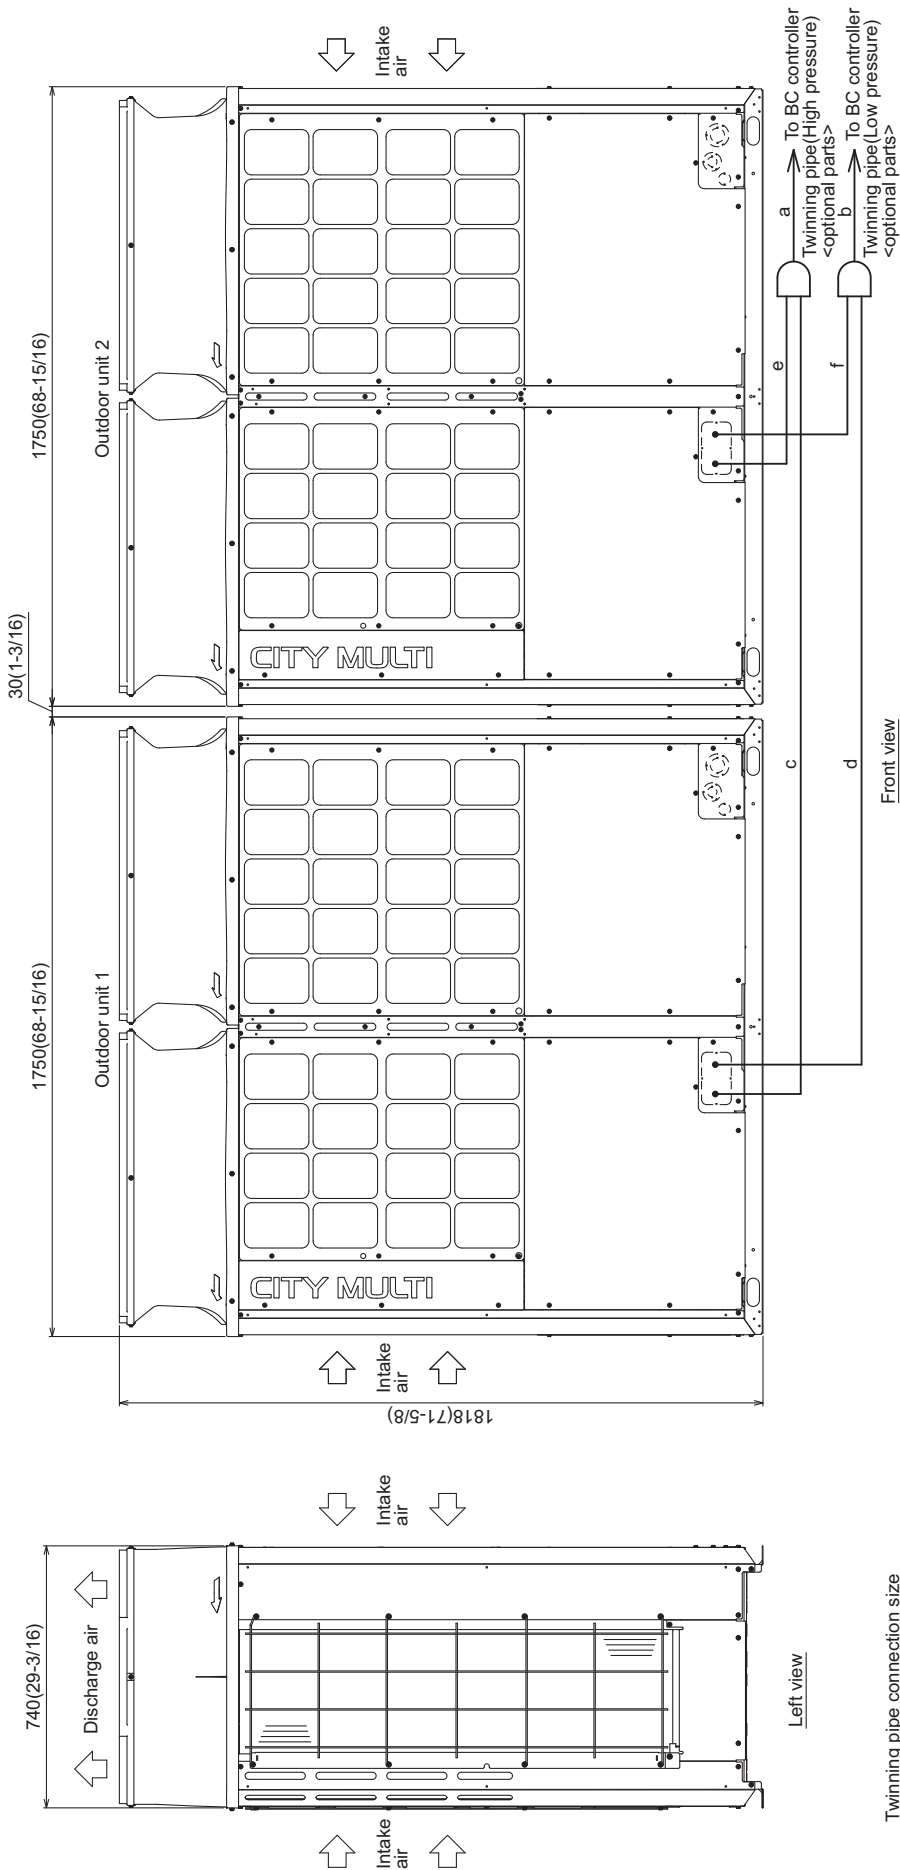

Twinning pipe connection size

Package unit name	PURY-EP304T(SNU-A-BS)	PURY-EP423T(SNU-A-BS)
Component unit name	PURY-EPI92T(NU-A-BS)	PURY-EPI216T(NU-A-BS)
Outdoor unit 1	PURY-EPI92T(NU-A-BS)	PURY-EPI216T(NU-A-BS)
Outdoor unit 2	PURY-EPI92T(NU-A-BS)	PURY-EPI216T(NU-A-BS)
Outdoor Twinning kit (optional parts)		CMY-R300N/CBK
BC controller	High pressure a	ø28.58 (1-1/8)
~Running pipe	Low pressure b	ø41.28 (1-5/8)

	Unit model	High pressure	Low pressure
		core	d or f
Twinning pipe-Outdoor unit	EP192	ø22.2(7/8)	ø28.58(1-1/8)
	EP216	ø22.2(7/8)	ø28.58(1-1/8)

Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.

2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.

Be sure to see the Installation Manual for details of Twinning pipe installation.

3. The pipe section before the Twinning pipe (section "a" and "b" in the figure) must have at least 500mm(19-11'16") of straight section

(*including the straight pipe that is supplied with the Twinning pipe).

4. Only use the Twinning pipe by Mitsubishi (optional parts).

Unit: mm (in.)

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.

Module: PURY-EP192TNU-A(-BS) - DIMENSIONS


Unit: mm (in.)

Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
2. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	High pressure	Low pressure	High pressure	Service valve Low pressure
EP192 (ø22.7/8) Brazed*1	ø28.58(1-1/8) Brazed	ø28.58(1-1/8) Brazed	ø28.58(1-1/8) Brazed	ø28.58(1-1/8)
EP216 (ø22.7/8) Brazed*1*2	ø34.3(1-3/8) Brazed*1	ø28.58(1-1/8) Brazed	ø34.3(1-3/8) Brazed*1	ø28.58(1-1/8)
EP240 (ø22.7/8) Brazed*1*2	ø34.3(1-3/8) Brazed*1	ø28.58(1-1/8) Brazed	ø34.3(1-3/8) Brazed*1	ø28.58(1-1/8)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.
*2 When the piping length is 65m(213ft) or longer, use the ø28.58(1-1/8) pipe for the part that exceeds 65m(213ft).

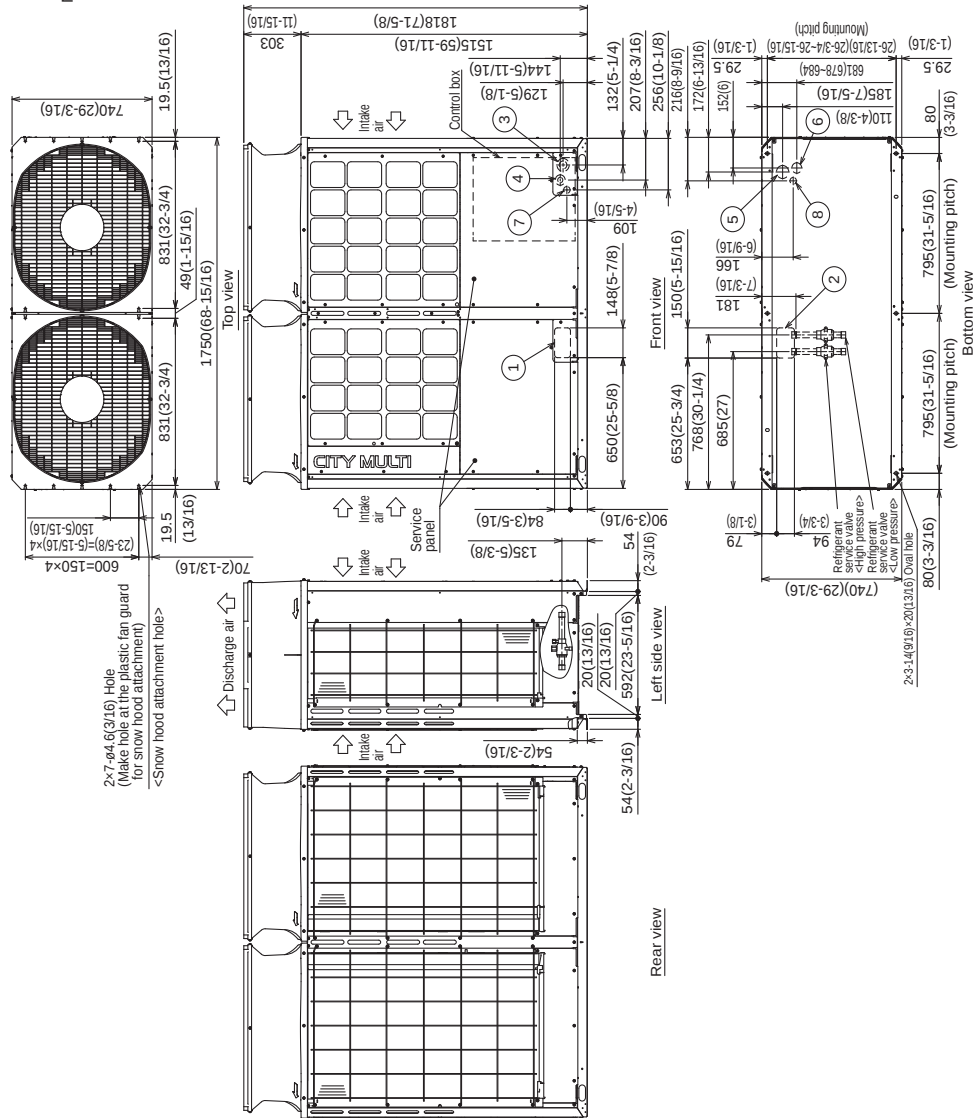

No.	Usage	Specifications
①	Front through hole	148(5-7/8) × 84(3-5/16) Knockout hole
②	Bottom through hole	150(5-15/16) × 94(3-3/4) Knockout hole
③	Front through hole	ø27.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④	Front through hole	ø43.7(1-3/4) or ø22.7(7/8) Knockout hole
⑤	Bottom through hole	ø65(2-9/16) Knockout hole
⑥	Bottom through hole	ø52(2-1/8) Knockout hole
⑦	Bottom through hole	ø34(1-3/8) Knockout hole
⑧	Bottom through hole	ø34(1-3/8) Knockout hole

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.