

SUBMITTAL DATA: SEZ-KD09NA4 & SUZ-KA09NA-TH**

9,000 BTU/H HORIZONTAL-DUCTED HEAT-PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For	Reference Approval Construction
System Designation:	Schedule No.:	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

**** APPLIES TO INDOOR UNIT:**

- SEZ-KD09NA4
- SEZ-KD09NA4.TH
- SEZ-KD09NAR1.TH
- SEZ-KD09NA4R1.TH



Indoor Unit: SEZ-KD09NA4**



Outdoor Unit: SUZ-KA09NA-TH

GENERAL FEATURES

- Horizontal-ducted indoor unit for concealed
- Ultra thin body: 7-7/8" high
- Built-in drain mechanism for condensate removal; lifts to 21-11/16"
- Air filter is included with indoor unit
- Quiet operation — as low as 23 dBA
- Indoor unit powered from outdoor unit using A-Control
- AUTO fan speed control
- Automatic restart following a power outage
- Limited warranty: five years parts and seven years compressors
- -H models have optional Drain Pan Heater (MAC-640BH-U)

ACCESSORIES

Controller Options

- Wireless Wall-mounted Remote Controller Kit (MHK1)*
- Portable Central Controller (MCCH1)*
- Outdoor Air Sensor (MOS1)*
- Wired Wall-mounted Controller (PAR-31MAA)*
- Wired Wall-mounted Controller (PAR-31MAA)*
- Simple MA Remote Controller (PAC-YT53CRAU)*


*See Submittal for information on each option.



SEZ-KD09NA4 INDOOR FAN PERFORMANCE AND CORRECTED AIR FLOW CHARTS**


SEZ-KD09NA4**

(External static pressure 0.02[in.WG](5P a) 208/230V 60Hz

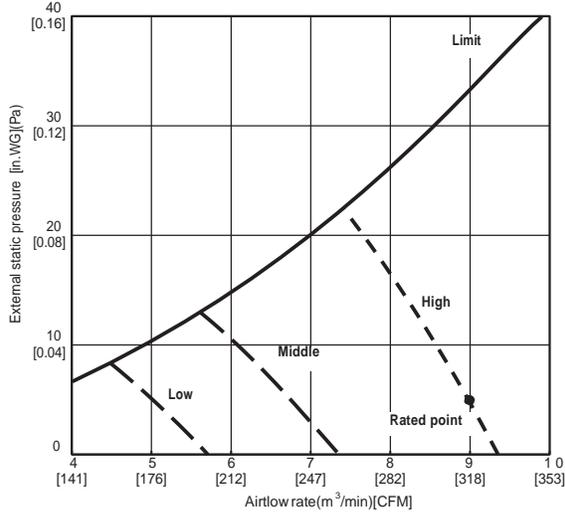


SEZ-KD09NA4**

(External static pressure 0.06[in.WG](15P a) 208/230V 60Hz

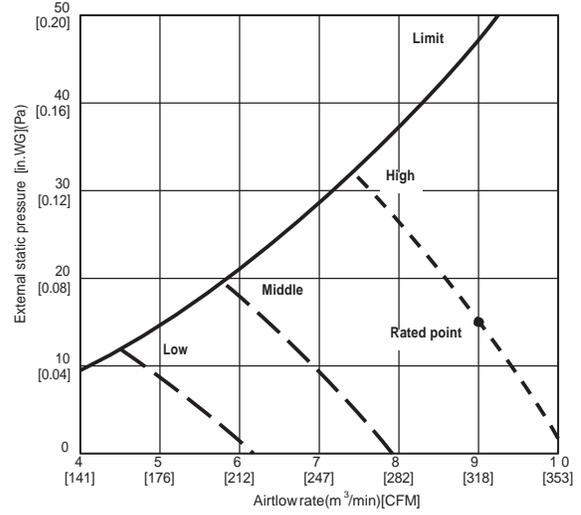


SEZ-KD09NA4**

(External static pressure 0.14[in.WG](35P a) 208/230V 60Hz

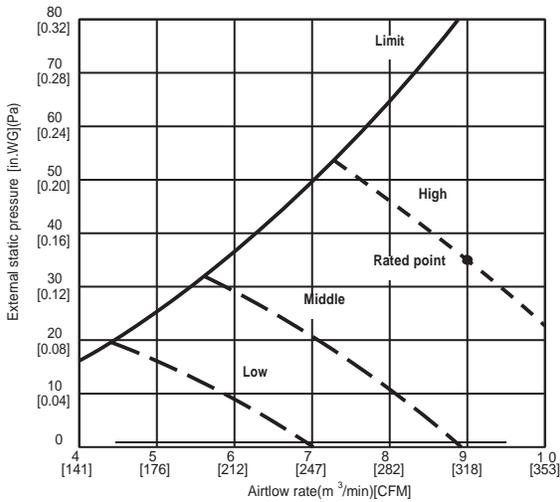


SEZ-KD09NA4**

(External static pressure 0.20[in.WG](50P a) 208/230V 60Hz

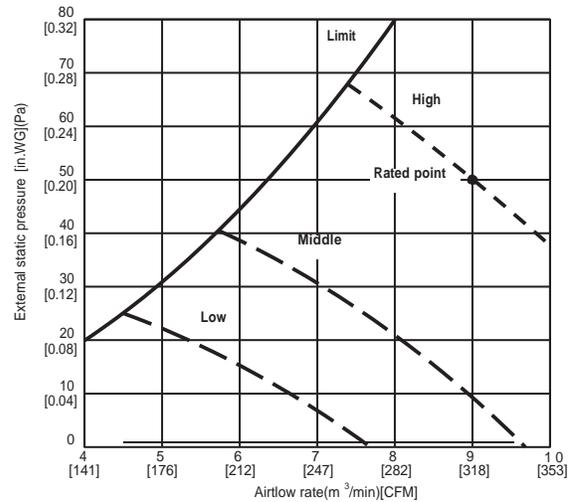


DIMENSIONS: SUZ-KA09NA-TH-H

Unit: inch

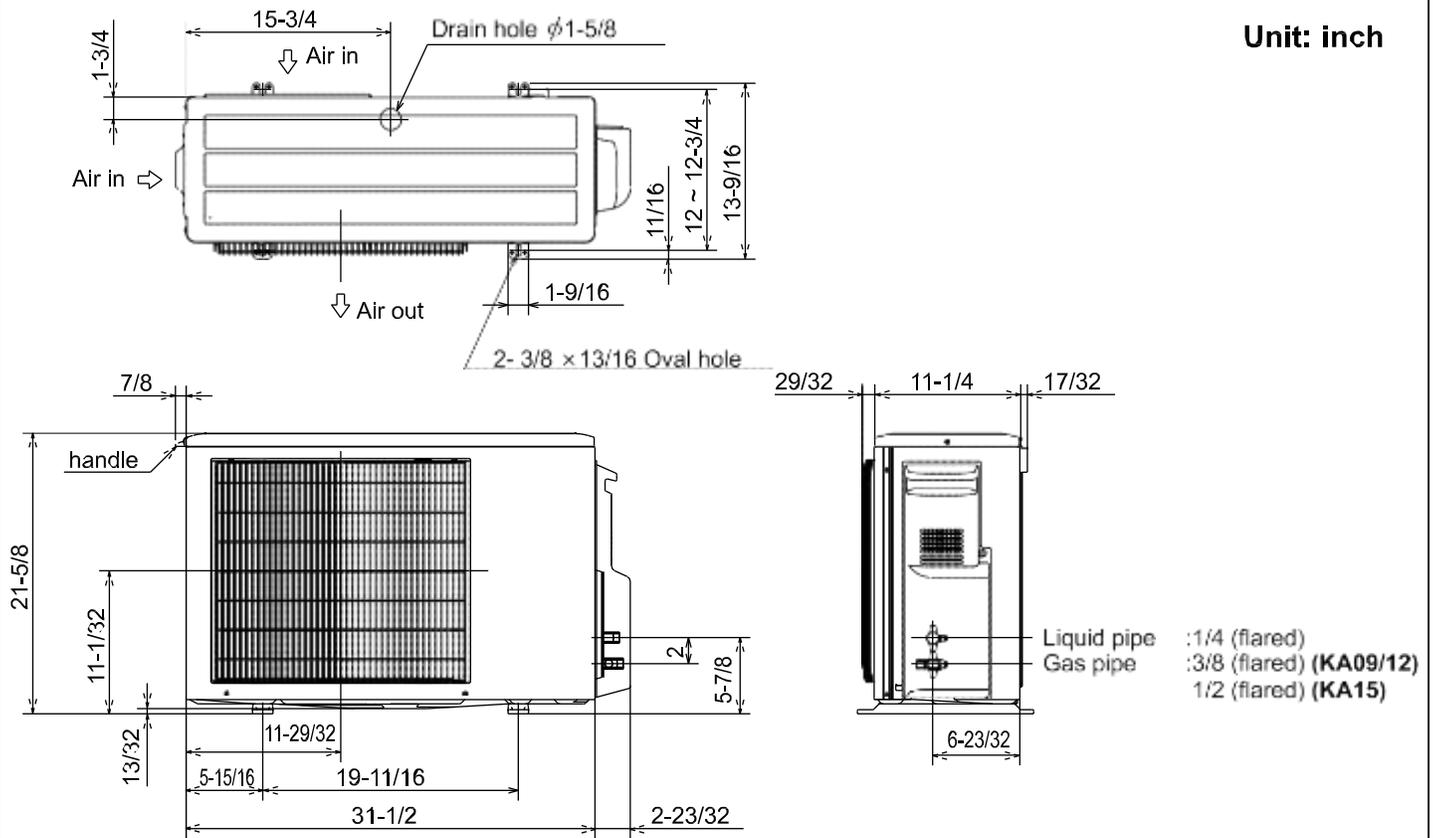

REQUIRED SPACE

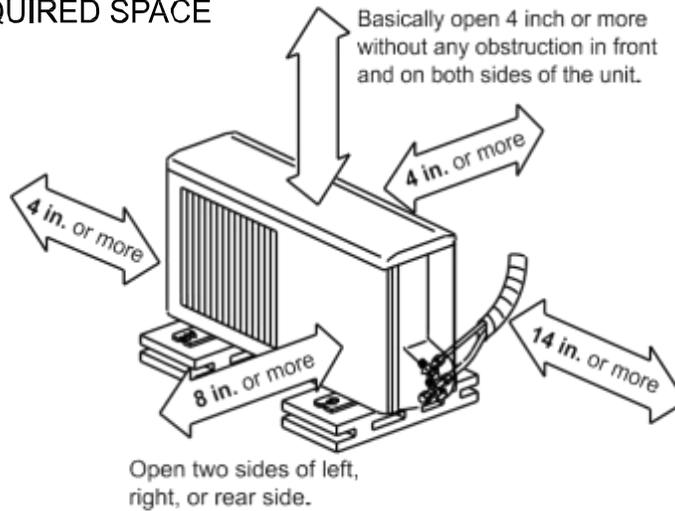

Intertek

HH SEZ-KD09NA4** & SUZ-KA09NA-TH 201603