

SUBMITTAL DATA: SLZ-KF15NA

15,000 BTU/H CEILING-CASSETTE INDOOR UNIT FOR MXZ MULTI-ZONE PUMP

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
System Designation:	Schedule No.:	



ACCESSORIES:

Grille (SLP-18FAEU - Ordered separate) (w/3D i-see sensor) Wired
 Remote Sensor (PAC-SE41TS-E)
 Outside Air Sensor for MHK1 (MOS1)
 Wire for Remote on/off with CN32 connector (PAC-715AD)
 Connector and wire for Operation status/error using CN51 (PAC-725AD)
 Connector of CN32 (remote on/off) (PAC-SE55RA-E)
 Connector cable for remote display (PAC-SA88HA-EP)

Optional Controls

Wired Remote Controller PAR-40MAA
 Simple MA Remote Controller (PAC-YT53CRAU-J)
 Thermostat Interface (PAC-US444CN-1)
 System Control Interface (MAC-334IF-E)
 Wireless Remote (PAR-SL100A-E)(Requires PAR-SF9FA-E)
 Backlit, Wall-mounted, Wireless Controller (MHK1)
 Portable Central Controller (MCCH1)

SPECIFICATIONS:

Rated Capacity*		
Cooling ¹	Btu/h / W	14,100
Heating at 47° F ²	Btu/h / W	18,000

NOTES: *1.Rating conditions (cooling)-Indoor : D.B. 26.7°C (80°F), W.B. 19.4°C (67°F) Outdoor : D.B. 35°C (95°F), W.B. 23.9°C (75°F)
 (heating)-Indoor : D.B. 21.1°C (70°F), W.B. 15.6°C (60°F) Outdoor : D.B. 8.3°C (47°F), W.B. 6.1°C (43°F)
 *2.Rating conditions(heating)-Indoor : D.B. 21.1°C (70°F), W.B. 15.6°C (60°F) Outdoor : D.B. -8.3°C (17°F), W.B. -9.4°C (15°F)

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz	
-------------------------------	----------------------------	--

Minimum Circuit Ampacity (MCA) *	A	0.40
----------------------------------	---	------

Blower Motor (ECM)	F.L.A.	0.32
--------------------	--------	------

Blower Motor Output	W	50
---------------------	---	----

Moisture Removal	pt./h	3.2
------------------	-------	-----

Field Drainpipe Size O.D.	In.(mm)	1-1/4 (31.75) [Mechanical lift 33 (850)]
---------------------------	---------	--

Airflow Rate (Lo - Med - Hi)		
DRY	CFM	245-315-405
WET		221-284-365

Sound Pressure Level (Lo - Med - Hi)		
Cooling	dB(A)	27-34-39


External Dimensions (H x W x D)	In.	8-3/16 X 22-7/16 X 22-7/16 (212 x 570 x 570)
---------------------------------	-----	---

Net Weight	Lbs.(kg)	30.6 (13.9)
------------	----------	-------------

External Finish	Munsell 1.0Y 9.2 / 0.2	
-----------------	------------------------	--

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	1/4 (6.35)
Gas (Low Pressure)		1/2 (12.7)

DIMENSIONS: SLZ-KF15NA

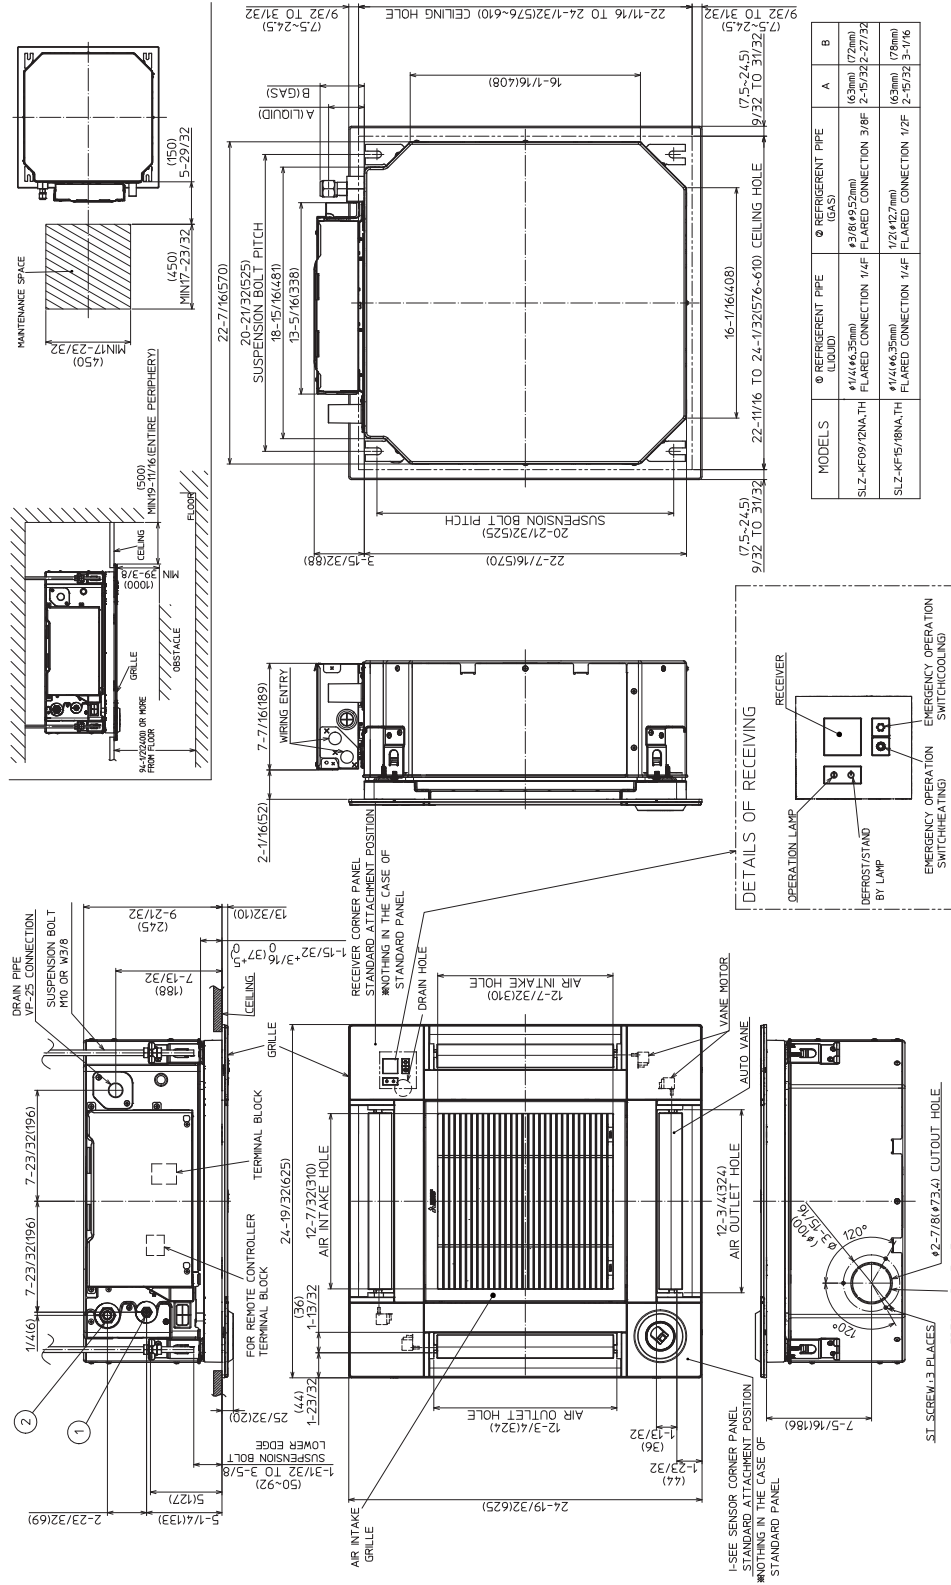

Unit: in. (mm)