

## SUBMITTAL DATA: SVZ-KP24NA

24,000 BTU/H MULTI-POSITION AIR HANDLER INDOOR UNIT FOR MXZ MULTI-ZONE PUMP SYSTEMS

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
System Designation:	Schedule No.:	


**SPECIFICATIONS:**

Rated Capacity*		
Cooling <sup>1</sup>	Btu/h / W	24,000
Heating at 47° F <sup>2</sup>	Btu/h / W	25,000

NOTES: <sup>1</sup>1.Rating conditions (cooling)-Indoor : D.B. 26.7°C (80°F), W.B. 19.4°C (67°F) Outdoor : D.B. 35°C (95°F), W.B. 23.9°C (75°F)  
(heating)-Indoor : D.B. 21.1°C (70°F), W.B. 15.6°C (60°F) Outdoor : D.B. 8.3°C (47°F), W.B. 6.1°C (43°F)  
<sup>2</sup>2.Rating conditions(heating)-Indoor : D.B. 21.1°C (70°F), W.B. 15.6°C (60°F) Outdoor : D.B. -8.3°C (17°F), W.B. -9.4°C (15°F)

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**ACCESSORIES:**

Electric Heater Kit (See\_SB\_EH\_MVZ\_PVA\_PVfy\_SVZ)

**Optional Controls**

Wireless Controller (MHK1)  
 Wired Remote Controller (PAR-40MAA)  
 Thermostat Interface (PAC-US444CN-1)  
 Simple MA Remote (PAC-YT53CRAU-J)  
 Wireless Remote Controller (PAR-FL32MA-E)  
 System Control Interface (MAC-334IF-E)

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz	
-------------------------------	----------------------------	--

Minimum Circuit Ampacity (MCA) *	A	3.00
----------------------------------	---	------

Blower Motor (ECM)	F.L.A.	2.4
--------------------	--------	-----

Blower Motor Output	W	121
---------------------	---	-----

Moisture Removal	pt./h	4.1
------------------	-------	-----

Field Drainpipe Size O.D.	In.(mm)	3/4 (19.05)
---------------------------	---------	-------------

Airflow Rate (Lo - Med - Hi)		
DRY	CFM	515-625-735
WET		N/A

Sound Pressure Level (Lo - Med - Hi)		
Cooling	dB(A)	33-36-41

External Dimensions (H x W x D)	In.(mm)	39-13/16 x 17 x 21-5/8 (1101 x 432 x 549)
---------------------------------	---------	--


Net Weight	Lbs.(kg)	93 (42.2)
------------	----------	-----------

External Finish	Black	
-----------------	-------	--

Refrigerant Piping (Flared)		
Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)

Specifications are subject to change without notice

# DIMENSIONS: SVZ-KP24NA

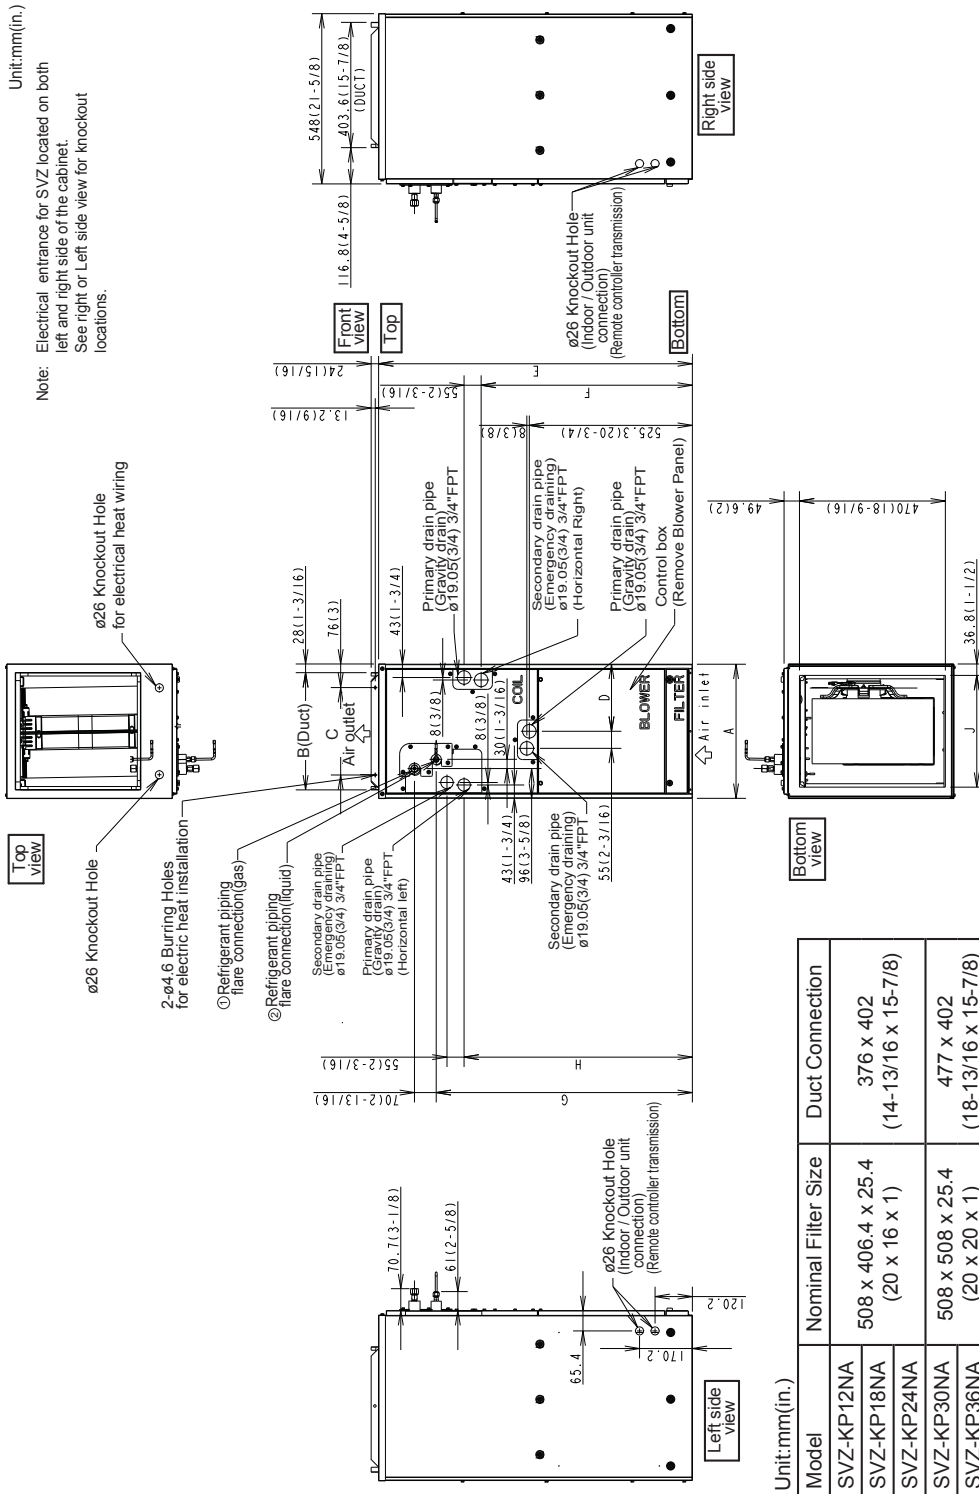

Model	Nominal Filter Size	Duct Connection
SVZ-KP12NA	508 x 406.4 x 25.4 (20 x 16 x 1)	376 x 402 (14-13/16 x 15-7/8)
SVZ-KP18NA	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)
SVZ-KP24NA	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)
SVZ-KP30NA	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)
SVZ-KP36NA	508 x 508 x 25.4 (20 x 20 x 1)	477 x 402 (18-13/16 x 15-7/8)

Model	A	B	C	D	E	F	G	H	J	Gas Pipe	Liquid pipe
SVZ-KP12NA	432 (17)	376 (14-13/16)	281 (11-1/8)	224 (8-7/8)	1,010.8 (39-13/16)	680 (26-13/16)	823 (32-7/16)	735.5 (29)	360 (14-3/16)	ø 9.52 (3/8) ø 12.7 (1/2)	ø 6.35 (1/4)
SVZ-KP18NA	534 (21)	477 (18-13/16)	382.6 (15-1/8)	266.5 (10-1/2)	1,113.8 (43-7/8)	737 (29-1/16)	953.5 (37-9/16)	792 (31-3/16)	461 (18-3/16)	ø 15.88 (5/8)	ø 9.52 (3/8)



Form # SB\_SVZ-KP24NA\_For\_MXZ\_SYS\_201912  
Specifications are subject to change without notice.  
www.MitsubishiElectric.ca  
© 2019 Mitsubishi Electric Sales Canada Inc.

Should this document be altered or changed without MESCA's permission, it becomes null and void. MESCA assumes no responsibility for any consequences in such cases.