




Job Name:

Schedule Reference:

Date:

**GENERAL FEATURES**

- Protects outdoor coil from wind, snow build-up as well hail damage in sever climates.
- 20-gauge satin coat steel, powder coated beige matching unit.

**NOTES:**

- Outdoor unit must be mounted at least 18" off the ground or 12" above the regional average snow fall, whichever is greater.
- Clearances for the sides and back of the outdoor unit must be at least 17" more than standard installation guidelines.
- For best coil protection, two and three module units must be mounted with a minimum of 1-3/16" space between each.

**SPECIFICATIONS**

| Model Number        | Description                        | Ship Weight     | Carton Dimensions    |
|---------------------|------------------------------------|-----------------|----------------------|
| <b>CM-SD-1-TJMU</b> | Side Wind / Snow Guard (2 per box) | 27 kg (59 lbs.) | 21" W x 9" D x 52" L |
| <b>CM-RE-1-TJMU</b> | Rear Wind / Snow Guard (1 per box) | 27 kg (59 lbs.) | 26" W x 9" D x 51" L |

**COMPONENTS REQUIRED PER OUTDOOR UNIT**

For models with two or three units, selections are based on a space of 1-3/16" between the modules. For additional space between the modules, additional components may be required.


**PUHY-HP-T(S)JMU-A-H**

| Unit model        | Model Sizes | Component Qty |              |
|-------------------|-------------|---------------|--------------|
|                   | S / L / XL  | CM-SD-1-TJMU  | CM-RE-1-TJMU |
| PUHY-HP72TJMU-A   | S           | 1             | 1            |
| PUHY-HP96TJMU-A   | L           | 1             | 1            |
| PUHY-HP120TSJMU-A | S + S       | 1             | 2            |
| PUHY-HP144TSJMU-A | L + L       | 1             | 2            |

Specifications are subject to change without notice.

# CM-SD-1-TJMU and CM-RE-1-TJMU – DIMENSIONS

CM-SD-1-TJMU

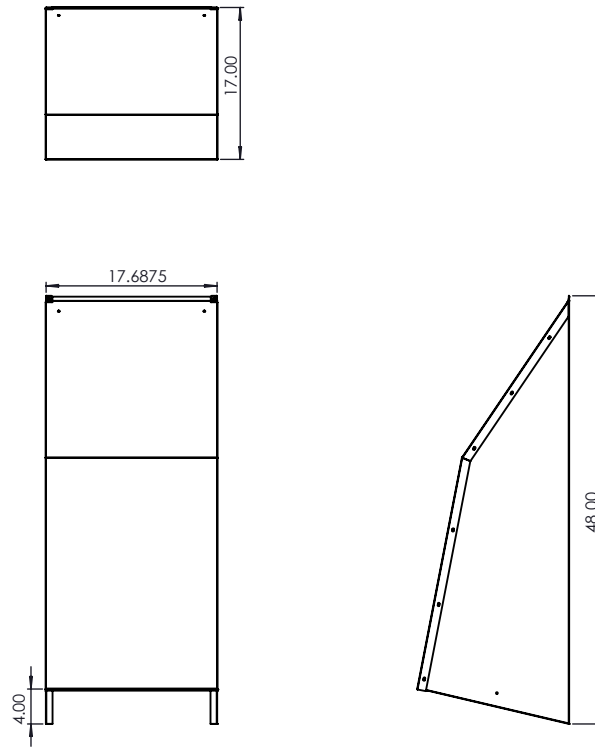

CM-RE-1-TJMU  
(Universal fitting S, L, XL)

