

Job Name:

Schedule Reference:

Date:

MAC-497IF-E Two wire MA Controller Interface



Wall Mounting Bracket (included)



SPECIFICATIONS:

- Allows connection of two wire MA controllers to M-Series indoor units via CN105 connector
- One Interface per indoor unit
- Connection: CN105 - IT Terminal
- Refrigerant Addressing using SW580 for Group control
- Group control application of 16 indoor units supported for M series products.
- Group control -Room temperature sensing at PAR controller or at indoor unit with refrigerant address 0 - (default SW500-2 =OFF suction sensor at indoor unit. SW500-2 =ON sense temperature at the PAR controller)
- Group control not supported for City Multi product or in combination with M-Series product
- Unit can be concealed behind indoor unit (all electrical and refrigeration lines must exit indoor unit on right side with MAC-497IF-E installed on left side. See installation diagram below) .
- Unit can be mounted horizontally or vertically on the wall beside the indoor unit with bracket

Please note: MESCA supports auxiliary heater control via CN24 for residential products ONLY.

Notes:


Specifications are subject to change without notice.

MAC-497IF-E: COMPATIBILITY

- PAR-40MAAU
- PAR-CT*MAU
- PAC-YT53CRAU-J

When using PAR-CT*MAU only one MA remote controller can be connected to an interface unit.
For all other models, up to 2 MA remote controllers can be simultaneously connected

MAC-497IF-E: DIMENSIONS AND INSTALLATION DIAGRAM

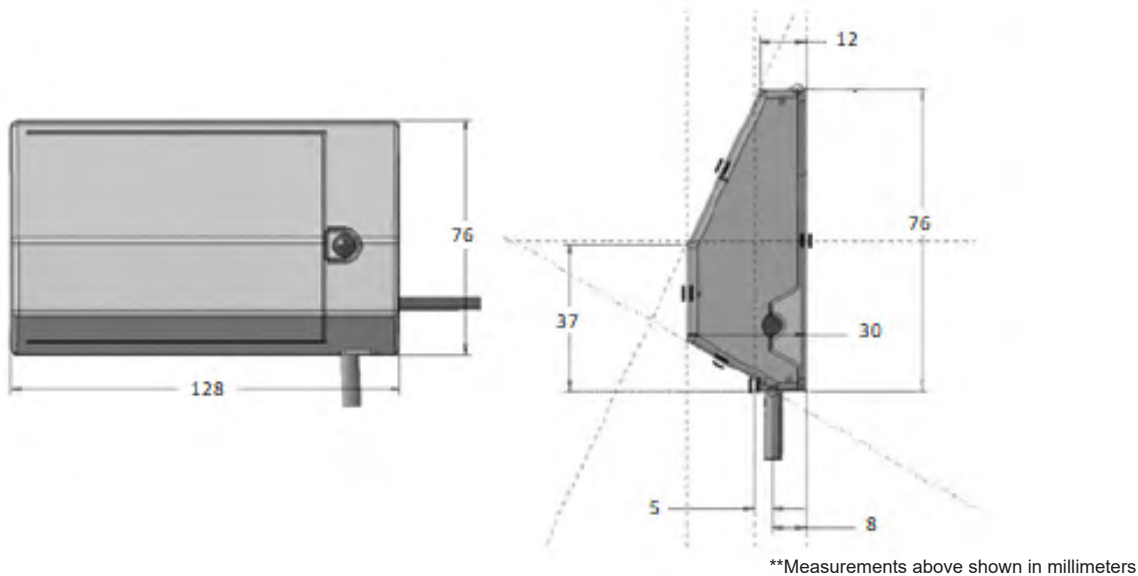

INSTALLATION DIAGRAM

